DTSR495GF

GE® 7.0 Cu. Ft. Super Capacity Gas Dryer with Stainless Steel Drum

Dimensions and Installation Information (in inches)

Exhaust Options: When viewed from the front of the unit, exhaust 3-way via rear, left and bottom. Dryer is shipped exhausted to the rear. Alternate exhausting knockouts are supplied.


Electric: An individual, properly-grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15 or 20 amp circuit breaker or a time-delay fuse, is required.

Gas Dryer Electric Rating: 120V, 60Hz, 6A

Gas (BTU/HR): 22,000. Factory-equipped for natural gas. Tested for LP gas. LP gas supply requires a conversion kit. Check installation instructions for correct kit and have a qualified gas technician install a conversion kit. See dryer ducting information for proper installation.

Note: Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

Installation Information: For complete information, see installation instructions packed with your dryer.

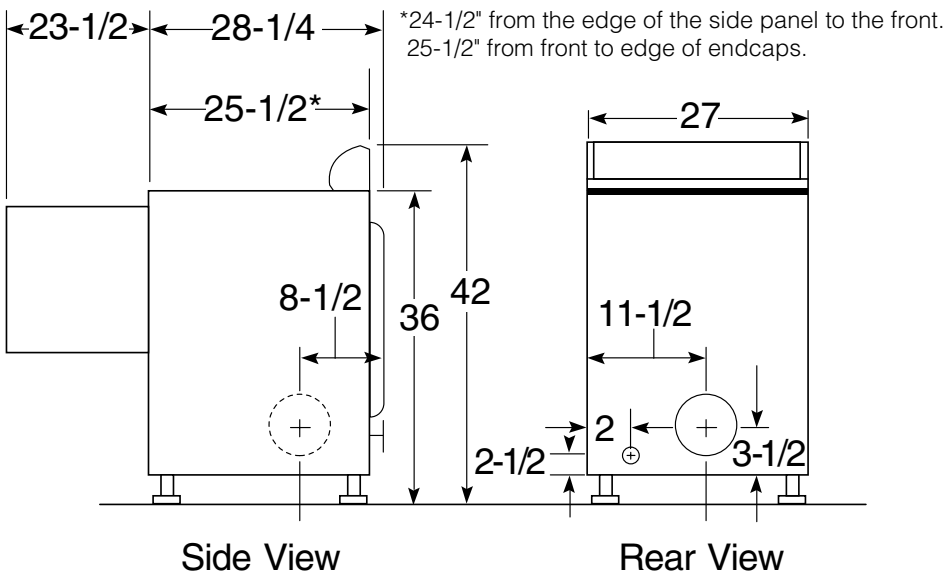

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.

imagination at work

Listed by Underwriters Laboratories

Specification Created 8/06 370181

DTSR495GF

GE® 7.0 Cu. Ft. Super Capacity Gas Dryer with Stainless Steel Drum

Special Installation Requirements

Ducting Materials: 4-way via rear, right, left and bottom.

Exhaust Length Calculation:

1. Determine the number of 90° turns needed for your installation. If you exhaust to the side or bottom of dryer, add one turn.
2. The maximum length of 4" rigid (aluminum or galvanized) duct which can be tolerated is shown in the table. The maximum length for flexible ducts are less than for rigid duct.

   A turn of 45° or less may be ignored. Two 45° turns within the duct length should be treated as a 90° elbow.
   A turn over 45° should be treated as a 90° elbow.

Exhausting the dryer to the outside is strongly recommended to prevent large amounts of moisture and lint from being blown into the room. Gas dryers or any dryer located in a closet **must** be exhausted to the outside.


Caution: For personal safety do not terminate exhaust into a chimney, under any enclosed house floor (crawl space), or into an attic, since the accumulated lint could create a fire hazard or moisture could cause damage. Never terminate the exhaust into a common duct or plenum with a kitchen exhaust, since the combination of lint and grease could create a fire hazard.

Exhaust ducts should be terminated in a dampered wall cap to prevent back drafts, bird nesting, etc. The wall cap must also be located at least 12" above the ground or any other obstruction with the opening pointed down.

Other terminations, such as louvered wall boxes, are acceptable provided they are equivalent to a 4" opening dampered wall cap.

For more information on venting kits and accessories, please call 1-800-GE CARES.

Dryer Exhausting Information — Use Metal Duct Only
Vertical and Horizontal Ducting



Domestic dryer models	Number of 90° turns	Best performance: Maximum length of 4" dia. **rigid metal** duct — Exhaust hood type: **A** 4" opening	Best performance: Maximum length of 4" dia. **rigid metal** duct — Exhaust hood type: **B** 2-1/2" opening	Maximum length of 4" dia. **flexible metal** duct — Exhaust hood type: **A** 4" opening	Maximum length of 4" dia. **flexible metal** duct — Exhaust hood type: **B** 2-1/2" opening
	0	150 ft.	127 ft.	75 ft.	52 ft.
	1	140 ft.	117 ft.	65 ft.	42 ft.
	2	130 ft.	107 ft.	55 ft.	32 ft.
7.3 capacity electric	3	120 ft.	97 ft.	45 ft.	22 ft.
and gas dryers	4	110 ft.	87 ft.	35 ft.	12 ft.
	0	90 ft.	60 ft.	55 ft.	45 ft.
	1	60 ft.	45 ft.	40 ft.	30 ft.
7.0 and 6.0	2	45 ft.	35 ft.	30 ft.	20 ft.
capacity models	3	35 ft.	25 ft.	20 ft.	15 ft.
all electric dryers	4	25 ft.	15 ft.	15 ft.	10 ft.
	0	90 ft.	60 ft.	55 ft.	45 ft.
7.0 and 6.0	1	60 ft.	45 ft.	40 ft.	30 ft.
capacity models	2	45 ft.	35 ft.	30 ft.	20 ft.
all gas dryers	3	35 ft.	25 ft.	20 ft.	15 ft.
	0	60 ft.	48 ft.	30 ft.	18 ft.
	1	52 ft.	40 ft.	22 ft.	14 ft.
	2	44 ft.	32 ft.	14 ft.	10 ft.
5.7 capacity electric	3	32 ft.	24 ft.	—	—
and gas dryers	4	28 ft.	16 ft.	—	—

Alcove or Closet Installation:

- If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.
- The dryer MUST be exhausted to the outside
- Minimum clearances between dryer cabinet and adjacent walls or other surfaces are: 0" either side and 3" front and rear
- Minimum vertical space from floor to overhead cabinets, ceilings, etc. is 52".
- Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.
- No other fuel-burning appliance shall be installed in the same closet with a gas dryer.

imagination at work

Listed by Underwriters Laboratories


Specification Created 8/06 370181

DTSR495GF

GE® 7.0 Cu. Ft. Super Capacity Gas Dryer with Stainless Steel Drum

Features and Benefits

- Sensor Dry Plus - Continually monitors moisture levels to help clothes look better longer
- Delicate Cycle with Extra-Low Heat Setting - Maintains an average fabric temperature of 125 degrees F to protect fine handwashables
- Four Heat Selections - Provide the right temperature for the right drying results
- Wrinkle Care Extended Tumble - Continues to tumble clothes without heat to help prevent wrinkling and creasing
- Interior Dryer Light - Lets you see everything inside for easy loading and unloading
- Nine Dry Cycles - Includes Sensor Dry Cottons, Optional Wrinkle Care, Sensor Dry Easy Care, Sensor Dry Delicates, Timed Dry, Dewrinkle, Quick Fluff (no heat) and Damp Dry
- Model DTSR495GFGG – Granite Gray

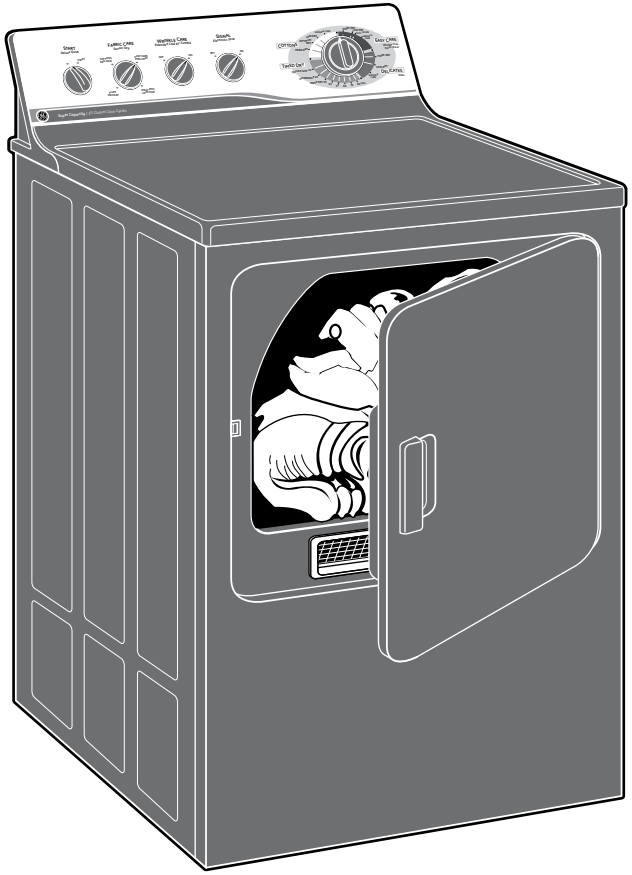

imagination at work

Specification Created 8/06 370181