

## **ASSEMBLY INSTRUCTION**

### QUEEN SLEIGH BED - HEADBOARD KING SLEIGH BED - HEADBOARD

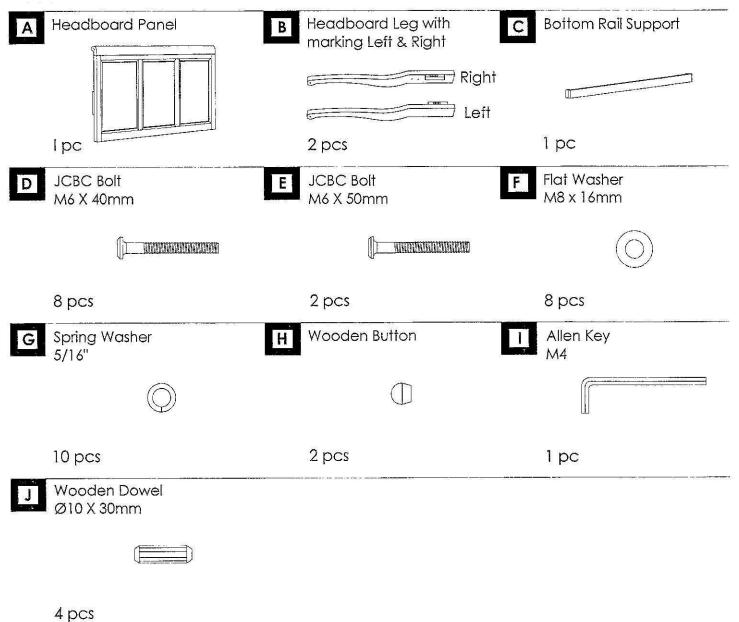




This page lists all the contants included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.


#### IMPORTANT NOTE:

- Do not tighten all screws / bolts until all completely assemble.
- Keep all hardware parts out of reach of children.

Insert Wooden Dowel (J) to the left & right holes at the Headboard Panel (A).

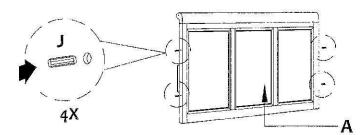


Attached Headboard Leg (B) to the Headboard Panel (A). Insert JCBC Bolt (E) and Spring Washer (G) to the holes and fighten using Allen Key (I). Cover the holes with Wooden Button (H). Attached Bottom Rail Support (C) to Headboard Leg (B). Insert JCBC Bolt (D), Spring Washer (G) and Flat Washer (F) to the holes and fighten using Allen Key (I).

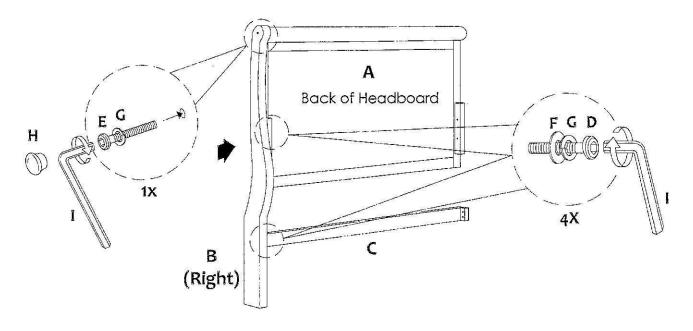

Repeat the same step on STEP 2 to the other Headboard Leg (B).

Insert JCBC Bolt (D), Spring Washer (G) and Flat Washer (F) to the holes at the back of Headboard and tighten using Allen Key (1).

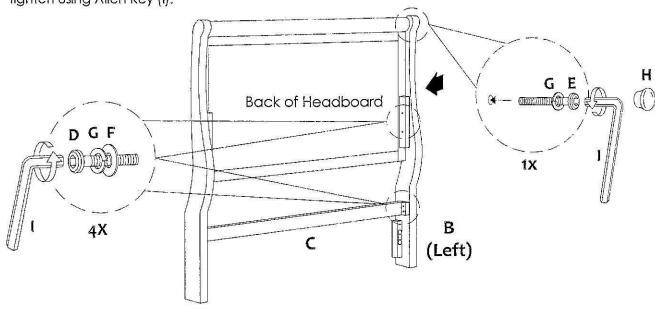


#### **CLEANING & CARE**


Treat surface with care. Surface is resistant to scratches but is not scratches resistant. Clean surface with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.

2

### **ASSEMBLY INSTRUCTION**

# QUEEN SLEIGH BED FOOTBOARD KING SLEIGH BED FOOTBOARD

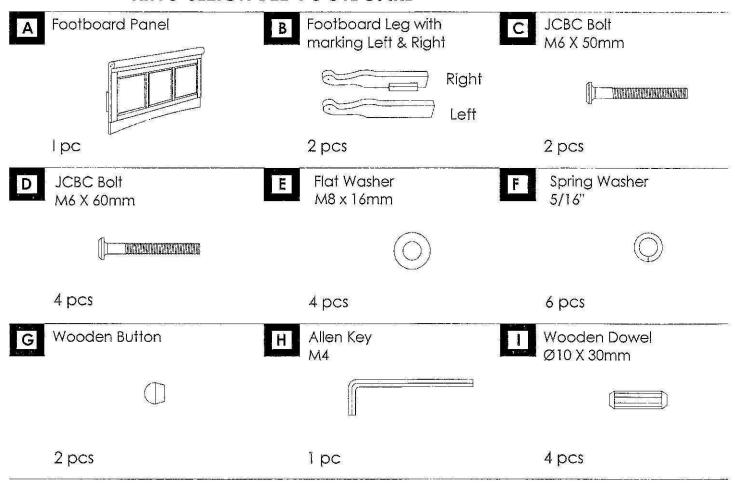

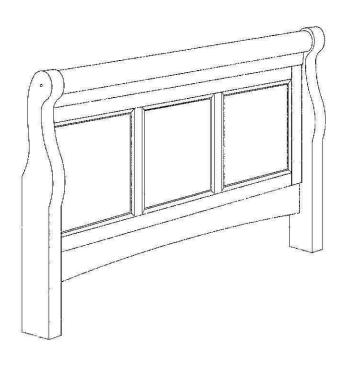


This page lists all the contants included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.


#### **IMPORTANT NOTE:**

- 1. Do not tighten all screws / bolts until all completely assemble.
- Keep all hardware parts out of reach of children.


Insert Wooden Dowel (I) to the left & right holes at the Footboard Panel (A).



Attached Footboard Leg (B) to the Footboard Panel (A). Insert JCBC Bolt (D) and Spring Washer (F) to the holes and tighten using Allen Key (H). Cover the holes with Wooden Button (G). Repeat the same process to the other Footboard Leg (B).

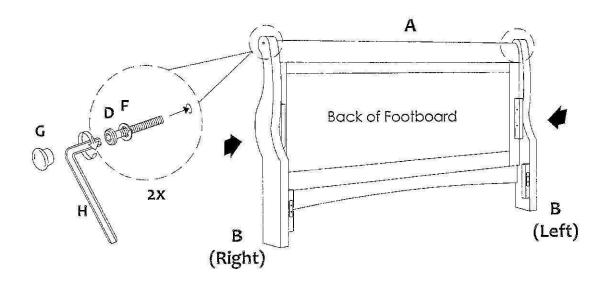

Insert JCBC Bolt (C), Spring Washer (F) and Flat Washer (E) to the holes at the back of Foootboard and tighten using Allen Key (H).

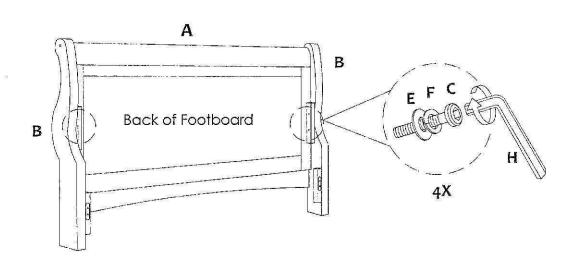


#### **CLEANING & CARE**


Treat surface with care. Surface is resistant to scratches but is not scratches resistant. Clean surface with a dry or damp soft cloth. Do not use abrasive cleaners, Hardware may loosen over time. Periodically check that all connections are tight.

2

## **ASSEMBLY INSTRUCTION**

## QUEEN SLEIGH BED - SIDE RAILS & SLATS KING SLEIGH BED - SIDE RAILS & SLATS

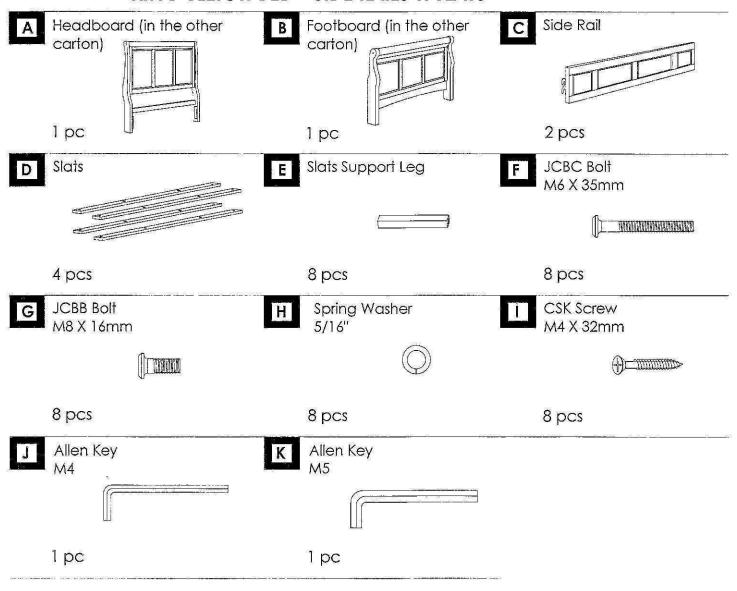

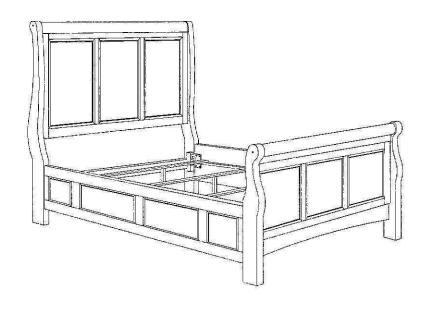


This page lists all the contants included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.


#### **IMPORTANT NOTE:**

- Do not tighten all screws / bolts until all completely assemble.
- 2. Keep all hardware parts out of reach of children.


Attached Side Rail (C) to Headboard (A) and Footboard (B) by inserting JCBB Bolts (G) loosely into provided holes, then hooking Side Rail brackets on as shown. Tighten all bolts using Allen Key (K).

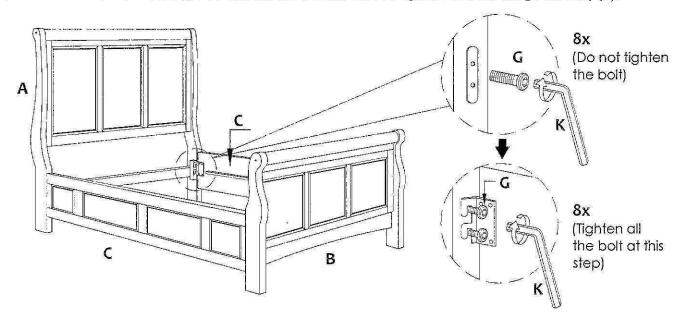

Attached Slats (D) to Slats Support Leg (E) and secure it with JCBC Bolt (F) and Spring Washer (H). Tighten all the bolts using Allen Key (J). Repeat the same process to all the Slats (D).

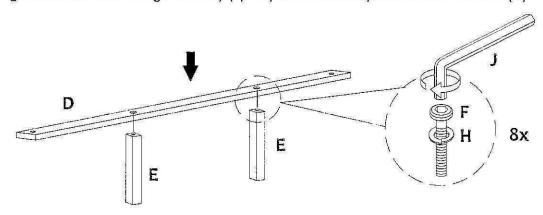

Place Slats (D) to the Side Rail (C). Tighten the Slats with CSK Screw (I) using Phillip Head Screwdriver (Not provided).

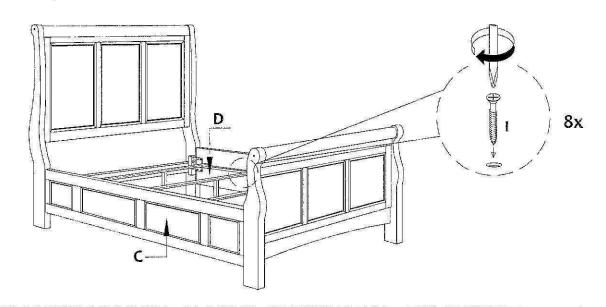

#### **CLEANING & CARE**

Treat surface with care. Surface is resistant to scratches but is not scratches resistant. Clean surface with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.

2