

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Parallax

Pendant 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens
PD-73129 29"	3000K 90	AB Aged Brass BK Black BN Brushed Nickel	37W	2071	1302

Example: **PD-73129-BN**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

Effortlessly deliberate. Unparalleled..

### FEATURES

- Rotatable light bar to create desired look
- Three 12" and one 6" downrods included (additional downrods available)
- Quick spin-on canopy design with minimal hardware for easy installation
- Can be mounted on slope ceiling
- Driver concealed within the canopy
- 5 year warranty

### SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-10%
Rated Life:	50000 Hours
Standards:	ETL, cETL,Title 24 JA8-2019 Compliant Damp Location Listed
Construction:	Aluminum body, PC diffuser

### REPLACEMENT PARTS


- RPL-ROD-IN06-AB - 6" rod - AB finish
- RPL-ROD-IN06-BK-01 - 6" rod - BK finish
- RPL-ROD-IN06-BN2-1 - 6" rod - BN finish
- RPL-ROD-IN12-AB - 12" rod - AB finish
- RPL-ROD-IN12-BK-01 - 12" rod - BK finish
- RPL-ROD-IN12-BN2-1 - 12" rod - BN finish



### FINISHES:

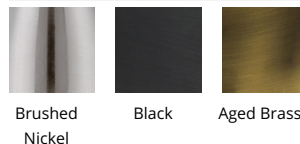

### LINE DRAWING:

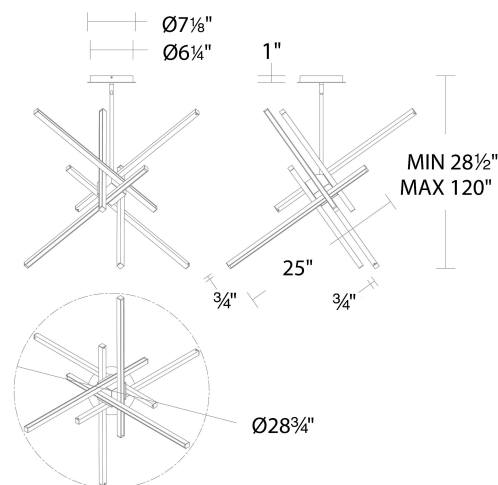

PD-73129

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Parallax

Pendant 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens
PD-73139 39"	3000K 90	AB Aged Brass BK Black BN Brushed Nickel	42W	2265	1523

Example: **PD-73139-BN**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

Effortlessly deliberate. Unparalleled..

### FEATURES

- Rotatable light bar to create desired look
- Three 12" and one 6" downrods included (additional downrods available)
- Quick spin-on canopy design with minimal hardware for easy installation
- Can be mounted on slope ceiling
- Driver concealed within the canopy
- 5 year warranty

### SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-10%
Rated Life:	50000 Hours
Standards:	ETL, cETL,Title 24 JA8-2019 Compliant Damp Location Listed
Construction:	Aluminum body, PC diffuser

### REPLACEMENT PARTS


- RPL-ROD-IN06-AB - 6" rod - AB finish
- RPL-ROD-IN06-BK-01 - 6" rod - BK finish
- RPL-ROD-IN06-BN2-1 - 6" rod - BN finish
- RPL-ROD-IN12-AB - 12" rod - AB finish
- RPL-ROD-IN12-BK-01 - 12" rod - BK finish
- RPL-ROD-IN12-BN2-1 - 12" rod - BN finish



### FINISHES:

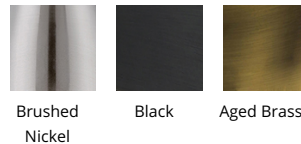

### LINE DRAWING:

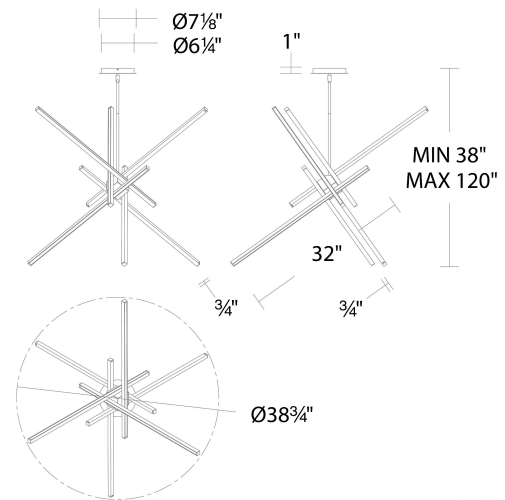

PD-73139