

SAFETY INFORMATION

Released Date: 2024-10-21

Please read and understand this entire manual before attempting to assemble, install or operate the product.


WARNING

- RISK OF ELECTRIC SHOCK - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.
- RISK OF FIRE - Use bulbs specified by the markings and/or labels on the fixture.

CAUTION

- For your safety, read instructions completely before beginning installation.
- If in doubt about electrical installation, consult a licensed electrician.
- Turn off electricity to fixture before replacing the bulb(s).

TOOLS REQUIRED

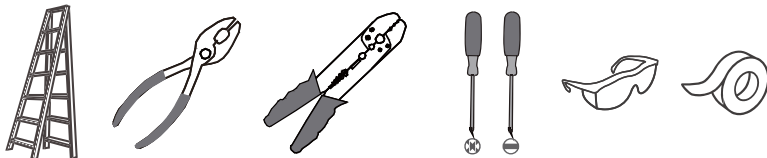


CARE AND MAINTENANCE


- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.

If you need further assistance call Quoizel Customer Care at 1-800-645-3184 (9:00am - 5:00pm EST), or visit us on-line at www.quoizel.com.

PACKAGE CONTENTS

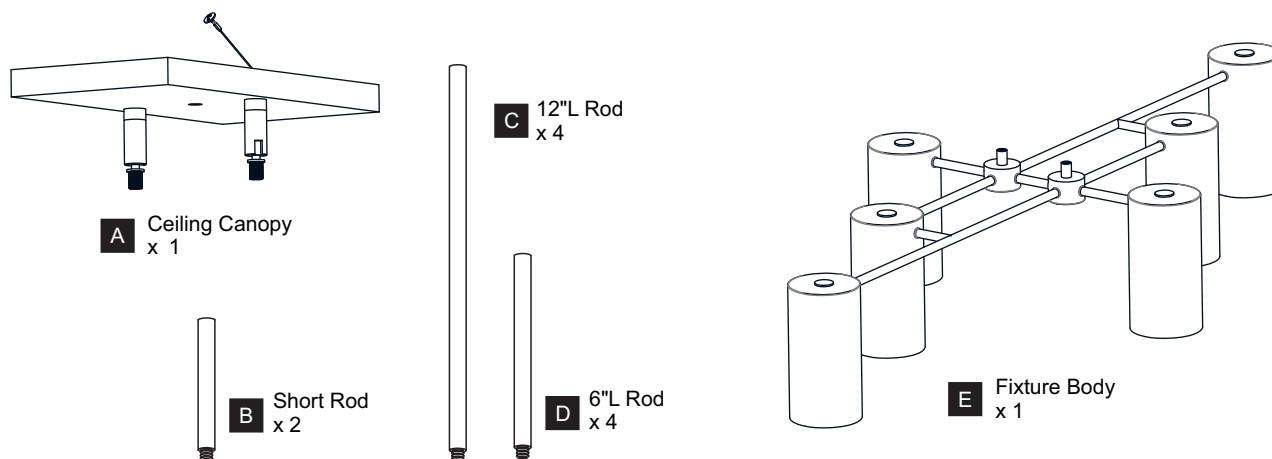

MOUNTING HARDWARE

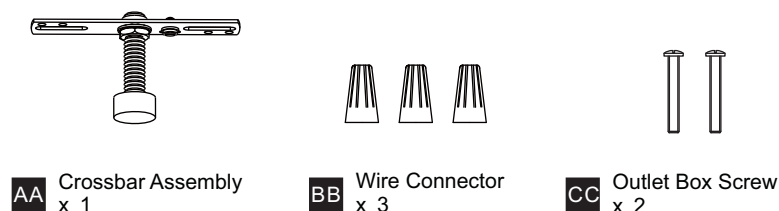

OPTION 1: PENDANT - FLD650BRG,FLD650MBK

1

Install Rods

Optional Rods:

8 Feet Ceiling:
(1) 6"L Rod + (1) 12"L Rod each side.

9 Feet Ceiling:
(1) 6"L Rod + (2) 12"L Rods each side.

10 Feet Ceiling:
(2) 6"L Rods + (2) 12"L Rods each side.

2

Separate Swivels from Ceiling Canopy

3

Install Swivels and Ceiling Canopy to Upper Rods

Swivel

90Degree

For angled ceilings,
Swivels opening towards wall.

* Make sure two swivels
opening are in the same
direction while assembling.

4

Install Crossbar Assembly

5

Install Lanyard

Lanyard

Button Stop

Lanyard

6

Wiring

White wire from supply

White from fixture

Black (or red) wire from supply

Black from fixture


Ground wire from supply

Ground wire from fixture


Green ground screw

INSTALLATION

7 Install Ceiling Canopy

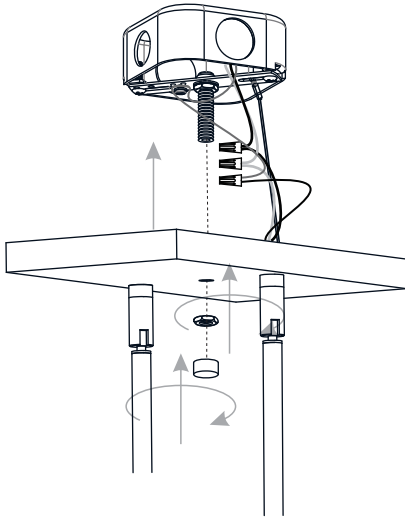

8 Install Bulbs

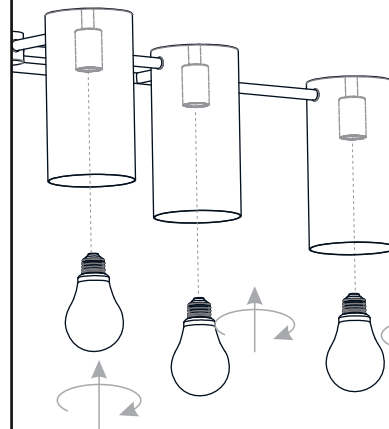

Install six correct bulbs referring to fixture markings and/or labels for maximum wattage.

Recommended Bulb type (not included):


BULB BASE TYPE
Medium (E26)


100W
MAX
BULB TYPE
TYPE A


Your installation is now complete! Restore electricity and save this sheet for future reference.

INSTALLATION


IMPORTANT: This CONVERTIBLE fixture can be mounted as pendant light or semi-flush light. **DO NOT CUT SUPPLY WIRES** if you intend to use it as pendant light.

OPTION 2: SEMI-FLUSH - FLD1750BRG,FLD1750MBK


* Set aside (4) 6"L Rods and (4) 12"L Rods, (2)swivel since they are not required for the semi-flush installation.



1 Install Short Rods

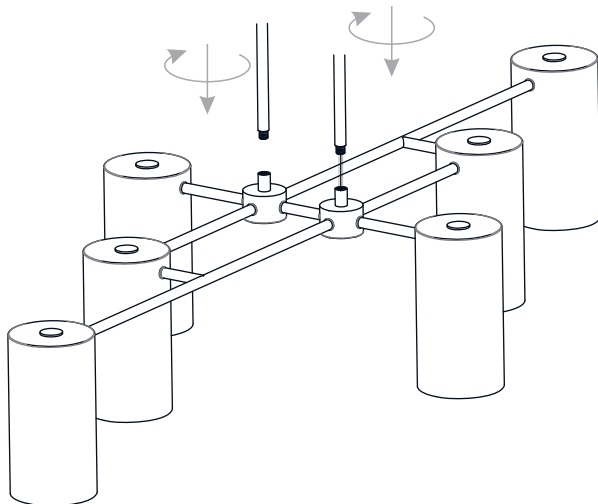


2 Separate Swivels from Ceiling Canopy

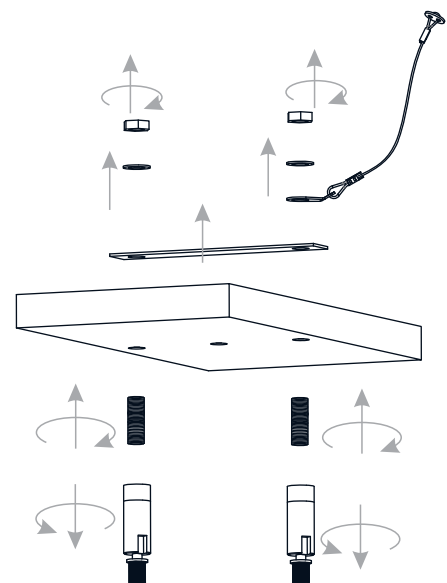


3

Install Ceiling Canopy to Shord Rods

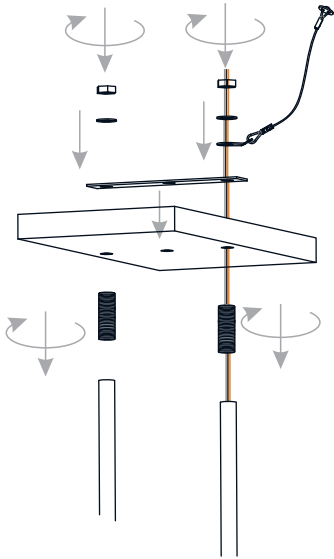


4

Install Crossbar Assembly

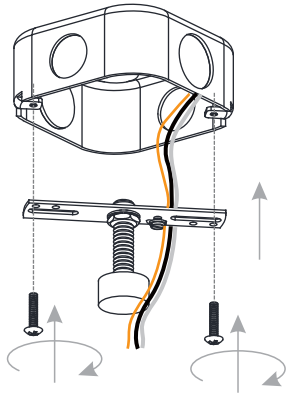


5

Install Lanyard

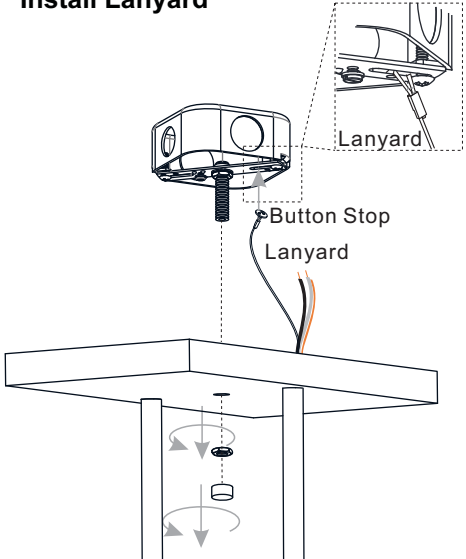


6

Wiring

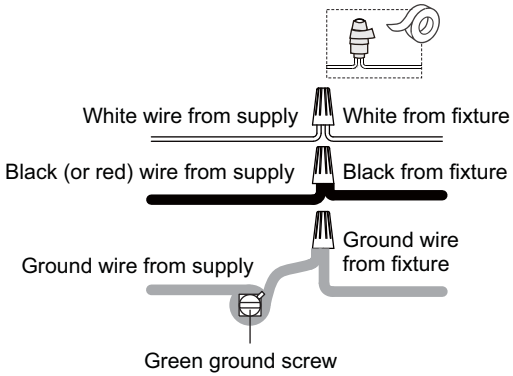


7

Install Ceiling Canopy

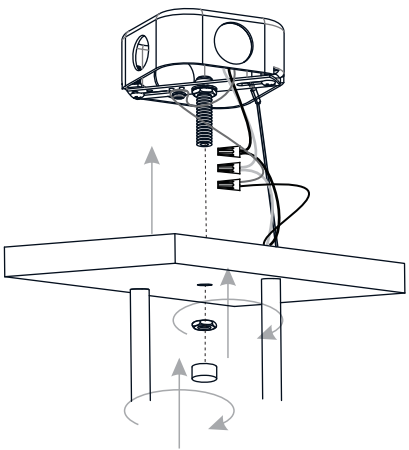

8

Install Bulbs

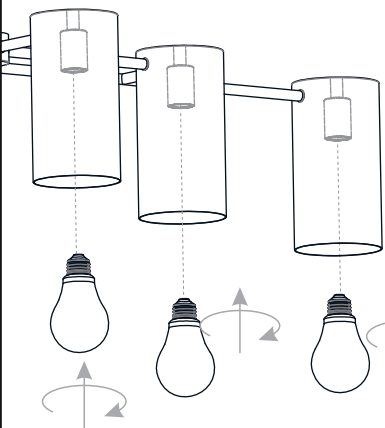

Install six correct bulbs referring to fixture markings and/or labels for maximum wattage.

Recommended Bulb type (not included):

BULB BASE TYPE Medium (E26)	BULB TYPE TYPE A
	

100W MAX

Your installation is now complete! Restore electricity and save this sheet for future reference.