



REMOVABLE CAP
TO TIGHTEN SCREW
(REPLACE WHEN COMPLETE)

5/16" INTERNAL HEX
PRESSURE SCREW



WIRE ENTRY POINT
WIRE RANGE: 600 KCMIL - #6 AWG
PRE-FILLED W/ OXIDE INHIBITOR

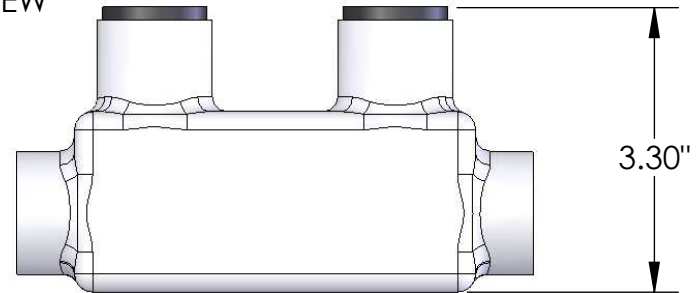

NOTES:

1. CONNECTOR MANUFACTURED FROM 6061-T6 ALUMINUM ALLOY.
2. UL LISTED PER UL486A/B SPECIFICATIONS FOR 600V.
3. DUAL RATED FOR 90°C COPPER AND/OR ALUMINUM CONDUCTOR.
4. COLD TEMPERATURE RATED TO -45°C.
5. HIGH DIELECTRIC STRENGTH INSULATION IS ABRASION AND CHEMICAL RESISTANT
6. UV RATED

		POLARIS SALES . CO . INC	
<small>PROPRIETARY AND CONFIDENTIAL</small>		<small>11625 PROSPEROUS DRIVE ODESSA, FL 33556</small>	
<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLARIS SALES CO. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLARIS SALES CO. INC. IS PROHIBITED.</small>		TITLE: INSULATED 600 SPLICE CONNECTOR	
<small>NAME</small>		<small>DATE</small>	
<small>DRAWN BY</small> L. HILL		<small>DATE</small> 07-23-10	
<small>MATERIAL:</small> N/A		<small>DWG. NO.</small> ISR600	
<small>SCALE:</small> N/A		<small>SHEET:</small> 1 OF 1	