

Strainers

FS Series

The FS / FSC series flanged wye strainers are perfectly suited for protecting downstream equipment from fouling due to debris. The FS is provided with a painted exterior and the FSC is coated with FDA approved epoxy inside and out. The FSC is an excellent choice for preventing debris fouling of any large diameter reduced pressure principle assembly, such as the Wilkins 375.



(FSC Shown)


- 2 1/2", 3", 4", 6", 8", 10"
- Class 125 lb. cast iron flanged wye type strainer
- ASTM A-126 class B epoxy coated cast iron

- Perforated self-aligning cylindrical metal screen
- Conforms to MIL-S-16293F, Type 2
- Taped for plug or blow off valve (Closure plug not furnished)


Model FS With epoxy paint exterior only, uncoated interior
Model FSC FDA approved epoxy coating inside and out

For Additional Information, Ask For STR-FS or visit our web site.

Local codes shall govern installation requirements. Unless otherwise specified, the assembly shall be mounted with sufficient clearance for maintenance in accordance with the manufacturers' instructions the latest edition of the Uniform Plumbing Code. The installation shall be made so that no part of the unit can be submerged.

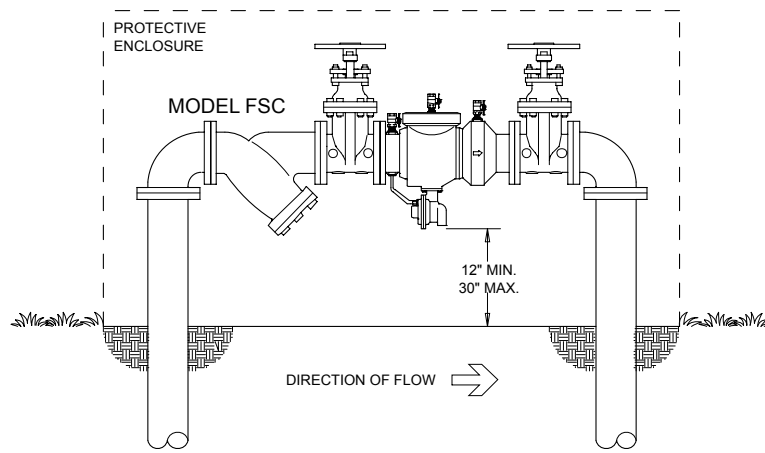

OUTDOOR INSTALLATION

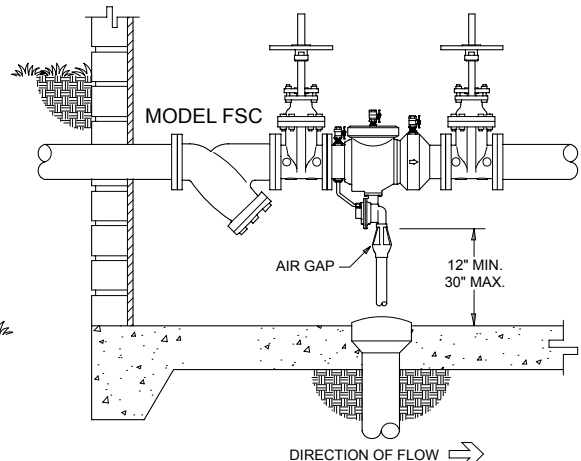

INDOOR INSTALLATION



SCREEN

SIZE inch	OPENINGS (dia.)	MATERIAL THICKNESS	HOLES PER sq/in.
2 1/2	0.045	0.020	225
3	0.045	0.020	225
4	0.062	0.020	98
6	0.062	0.020	98
8	0.125	0.020	29
10	0.125	0.032	29

Applications

Options Features

Typical Installation