

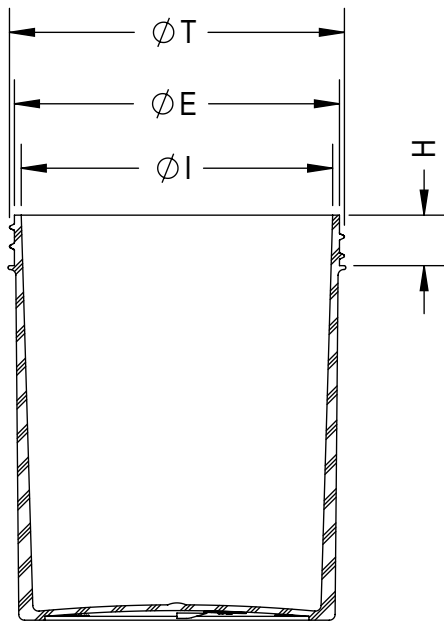
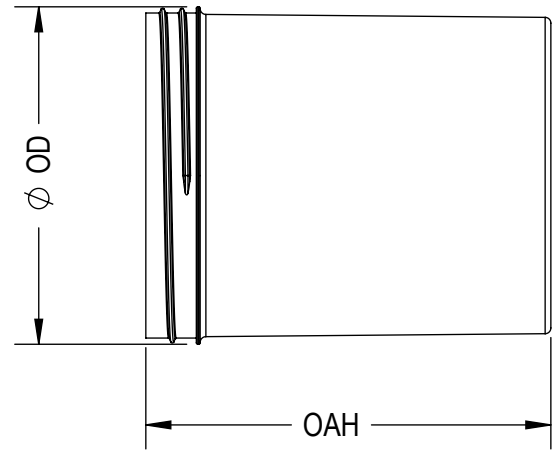


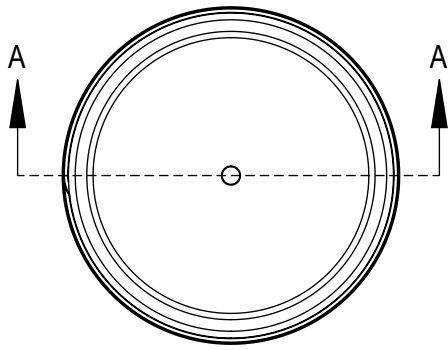

SECTION A-A

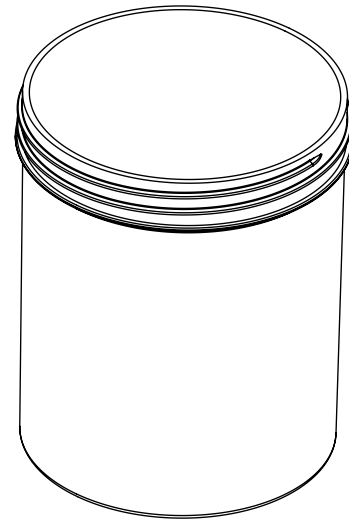

REFERENCE	DIMENSION	TOLERANCE	UNITS
ØT	3.489 [88.62]	±0.017 [0.43]	in [mm]
ØE	3.386 [86.00]	±0.017 [0.43]	in [mm]
ØI	3.244 [82.40]	±0.015 [0.38]	in [mm]
H	0.526 [13.36]	±0.015 [0.38]	in [mm]
OAH	4.219 [107.16]	±0.015 [0.38]	in [mm]
OD	3.515 [89.28]	±0.017 [0.43]	in [mm]
PART WEIGHT	58.20	±4.50	g
VOLUME	18.52 [547.7]	REFERENCE	fl oz [cc]
STATIC TORQUE RECOMMENDATION: 40-70 in-lbs REQUIREMENT MAY VARY DEPENDING UPON CONTAINER MATERIAL, NECK FINISH, AND CAPPING EQUIPMENT			
THREAD DETAIL INFORMATION:	5 THREADS PER INCH	0.200" [5.08] PITCH	540° FULL DEPTH THREADS

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITY TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:





REF NO.:

DWG31826

DESCRIPTION:

18 oz PP Straight Sided Jar, 89 mm

THREAD
START



GATE

DECO
LUG

S'
0.140
[3.56]



FILL LEVEL
TO 18 FL OZ
4.219
[107.16]

(BOTTOM OD)
 ϕ 3.296
[83.72]

HIGH GLOSS FINISH
ALL OUTSIDE SURFACES

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITY TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG31826

DESCRIPTION:

18 oz PP Straight Sided Jar, 89 mm

