
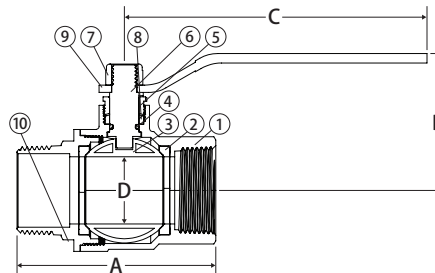


Lead Free Brass Ball Valve

2 Piece, Full Port, MIP x FIP Connection, Stainless Steel Trim, 600 WOG

JF-100GMxF

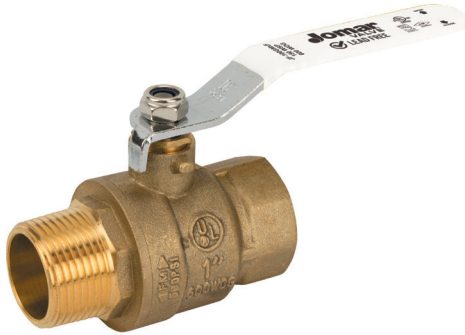

FEATURES

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Lead Content

CERTIFICATIONS/APPROVALS


- UL Listed up to 175 PSI
 - MHKZ - Manual Valves
 - YRPV - Gas Shut-Off Valves
- IAPMO Certified
 - NSF 61-8
 - NSF 372
 - Uniform Plumbing Code (cUPC)
 - IAPMO/ANSI Z1157-2014
 - NSF/ANSI 14-2014
- FM Approval (1/2" - 2")
- MSS SP-110
- ANSI B1.20.1

PRESSURE/TEMPERATURE RATING

600 WOG
450°F

VALVE SEAT RATING

600 WOG - 150 WSP

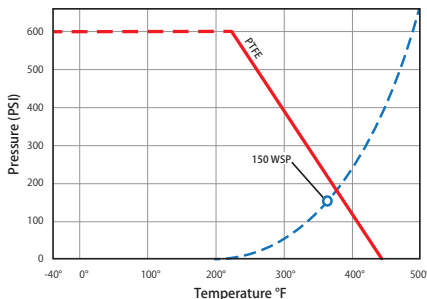

MATERIALS

No.	Part	Material
1	Body	Lead Free Brass - C46500
2	Seat	PTFE
3	Ball	304 Stainless Steel
4	O-Ring	NBR
5	Packing Nut	Brass
6	Stem	304 Stainless Steel
7	Handle Nut	Steel - Chrome Plated
8	Packing	PTFE
9	Handle	Steel - Chrome Plated
10	Cap	Lead Free Brass - C46500

DIMENSIONS

Part No	D	A	B	C	Cv
100-131G	1/4"	2.05	1.68	3.46	8.23
100-132G	3/8"	2.13	1.68	3.46	8.23
100-133G	1/2"	2.50	1.81	3.46	18.55
100-134G	3/4"	3.01	2.09	4.29	29.76
100-135G	1"	3.27	2.25	4.29	51.55
100-136G	1-1/4"	3.72	2.53	5.63	84.42
100-137G	1-1/2"	4.15	2.74	5.63	131.91
100-138G	2"	4.71	3.04	6.10	200.39