

FEATURES & SPECIFICATIONS

INTENDED USE — Recessed housing rated IC or Non-IC. For remodel construction only.

Approved for factory assembled wiring only.

Approved for direct burial in insulation.

CONSTRUCTION — Air-tight standard. Tested to meet current energy codes.

Aluminum housing with three remodel clips for installation in existing plaster, sheet rock or mechanical ceilings.

Heavy-gauge galvanized steel raceway arm.

Galvanized steel junction box with four built in romex clamps; five ½" knockouts with slots for pryout. Not suitable for pulling wires.

Maximum 4 (2in 2out) No 12 AWG conductors. Rated for 90° C.

Ground wire provided.

Removable J-box door for easy access.

Trim retention (clips): Retaining clips riveted to top of reflector hold trim inside housing.

Trim retention (TOR): Two-side mounted torsion springs on the trim and 2 receiving brackets in the can ensure a consistently tight fit with the ceiling.

ELECTRICAL — Durable medium base porcelain socket with nickel plated copper alloy screw shell and contact.

Socket clips to top of housing to prevent paint overspray in socket screw shell.

Thermal protection provided against improper lamp usage.

120 volt only.

INSTALLATION — Air-tight housing suitable for air-tight installations. Refer to energy codes for proper installations.

2 x 6 existing ceiling or T-bar ceiling panel installation.

Clip adjustment on housing (up to 1-¼") allows for flush mounting with ceiling face.

Socket attaches to reflector to ensure proper and consistent lamp position.

LISTINGS — UL Listed to US and Canadian safety standards. Damp location listing (see trim selection for wet location listing).

WARRANTY — 1-year limited warranty. Complete warranty terms located at

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application.

Specifications subject to change without notice.

Catalog Number
Notes
Type

6" Housing

L7XPR

INCANDESCENT
IC Shallow
Remodel



Specifications

Height: 5-3/4 (14.6)


Length: 12-3/8 (31.4)

Width: 5-3/4 (14.6)

Ceiling opening: 6-7/8 (17.5)

Ceiling cutout template: 6.65

All dimensions are inches (centimeters) unless otherwise specified.

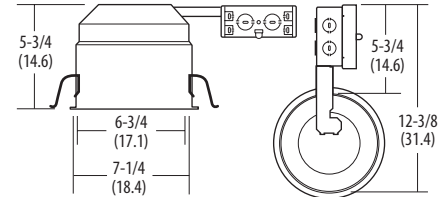

ORDERING INFORMATION

For shortest lead times, configure product using **standard options (shown in bold)**.

Example: L7XPR R6

L7XPR			
Series	Options	Packaging	
L7XPR	<u>Shipped installed in fixture</u>		
	PHC	Poke-home wire connector	
	GSKT	Foam gasketing, aids in air-tight installation	
		R6	Resale pack of six
		U	Unit pack (non-stock)

Accessories: Order as separate catalog number.

ATK6 R6	6" Air-tight trim kit
HS6875	6-7/8" hole saw

Note

See trim summary on reverse side for maximum wattages.

L7XPR 6" Shallow Remodel Housing

Description Catalog number	Maximum wattage ¹	Description Catalog number	Maximum wattage ¹	Description Catalog number	Maximum wattage ¹
General/Task					
Open Wide Flange C01	White	Baffle Narrow Flange 7B0W	White	Pinhole Narrow Flange CS1	White
	60 A19 65 BR30 75 PAR30		65 BR30 75 PAR30		40 A19 50 BR20 50 PAR20
IC		IC		IC	
Open Wide Flange C01 TOR	White	Baffle Wide Flange 7B1 TOR	Black	Wallwash Narrow Flange CW1	White
C01BN TOR	Brushed nickel	7B1W TOR	White		40 A19
C01ORB TOR	Oil-rubbed bronze		65 BR30 75 PAR30	IC	
C01BZA TOR	Antique bronze	IC			
	60 A19 65 BR30 75 PAR30	Accent/Adjustable		Lens/Wet Location	
IC		Eyeball Narrow Flange CE1	White	Shower/Closet Narrow Flange ² CLD1	Drop opal*
Open Narrow Flange C02	White		65 BR30 75 PAR30		40 A19
C02A	Clear diffuse	IC		IC	
C02AZ	Clear specular	Baffled Eyeball Narrow Flange CE2	White/black	Shower/Closet Narrow Flange ² CLF1	Flush opal*
	60 A19 65 BR30 75 PAR30	CE2W	White/white	CLF2	Flush prismatic*
IC			65 BR30 75 PAR30		40 A19
Open Wide Flange 701 TOR	White	IC		IC	
	65 BR30 75 PAR30	Eyeball Wide Flange 7E1 TOR	White	Shower/Closet Narrow Flange ² 7LD1	Drop opal metal flange
IC		7E1BN TOR	Brushed nickel	7LD1 PF	Drop opal plastic*
	65 BR30 75 PAR30	7E1ORB TOR	Oil-rubbed bronze	7LD2 PF	Drop prismatic plastic*
IC		7E1BZA TOR	Antique bronze		40 A19
Baffle Wide Flange CB1	Black		65 BR30 75 PAR30	IC	
CB1W	White	IC		* For plastic flange add suffix PF	
	40 A19 65 BR30 75 PAR 30	Regressed Eyeball Wide Flange 7RE1	White		
IC			65 BR30 50 PAR30		
Baffle Wide Flange CB1 TOR	Black	IC			
CB1W TOR	White				
	40 A19 65 BR30 75 PAR 30				
IC					

Notes

- Maximum wattage listed. Lower wattage lamps may be used.
- Lens trims are wet location listed. All others are damp location.

L7XPR 6" Shallow Remodel Housing

P Series Open and Baffle Wide Flange LED Modules (Wet Location) ¹



Example: 6BP TRMW LED 27K 90CRI
L7XPR²

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Series/Finish	Lamp	CCT / CRI / W / Lumens ³	Voltage
6BPMW 6" Baffle LED module, matte white ¹	LED	(blank) 3000 K / 83 CRI / 8.9W / 620L	(blank) 120V
6BP TRMW 6" Baffle LED module, black baffle, matte white flange		27K 90CRI 2700 K / 93 CRI / 11.2W / 600L	
6BPBN 6" Baffle LED module, brushed nickel		30K 90CRI 3000 K / 93 CRI / 11.2W / 600L	
6BPORB 6" Baffle LED module, oil-rubbed bronze			
60PA 6" Open LED module, clear diffuse	HL LED	(blank) 3000 K / 83 CRI / 15.2W / 950L	
60PAZ 6" Open LED module, clear specular		27K 90CRI 2700 K / 93 CRI / 16.5W / 860L	
60PA TRMW 6" Open LED module, clear diffuse, matte white flange		30K 90CRI 3000 K / 93 CRI / 16.5W / 860L	
60PAZ TRMW 6" Open LED module, clear specular, matte white flange			

Notes

- 1 Wet location listing is for base MW trim only.
- 2 L7XPR housing ordered on a separate line.
- 3 Total system delivered lumens.

LED Gimbal Module (Damp location)



Example: 6G1MW LED
L7XPR¹

ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

6G1	LED		
Series/Finish	Lamps	CCT / CRI / W / Lumens ³	Voltage
<u>Series</u> 6G1 6" Gimbal Module	<u>Finish</u> MW Matte white MB Matte black ² BN Brush nickel ² ORB Oil-rubbed bronze ²	(blank) 3000k / 83CRI / 10.8W / 620L 27K 90CRI 2700K / 91CRI / 11W / 680L 30K 90CRI 3000K / 91CRI / 10.3W / 790L 40K 90CRI 4000K / 94CRI / 10.5W / 820L	(blank) 120V

Notes

- 1 L7XPR housing ordered on a separate line.
- 2 Available in 30K 83CRI only.
- 3 Total system delivered lumens.

E Series Baffle Wide Flange LED Modules (Wet Location)



Example: 65BEMW LED 27K
L7XPR¹

ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

	LED		
Series/Finish	Lamp	CCT / CRI / W / Lumens ²	Voltage
65BEMW 5" / 6" Baffle LED module, matte white	LED	27K 2700 K / 82CRI / 11.9W / 640L 30K 3000 K / 82CRI / 11.9W / 687L 40K 4000K / 82CRI / 11.9W / 711L 27K 90CRI 2700K / 93CRI / 10.3W / 650L 30K 90CRI 3000K / 93CRI / 10.1W / 690L	(blank) 120V

Notes

- 1 L7XPR housing ordered on a separate line.
- 2 Total system delivered lumens.



An AcuityBrands Company

L7XPR