

SONANCE

VISUAL PERFORMANCE DATA SHEET

BPS6 TL Subwoofer

TECHNICAL SPECIFICATIONS

SKU	BPS6 TL 93324
UOM	Each
Woofers	13" x 3" (330mm x 76mm) laminated carbon fiber cone with a rubber surround, dual voice coil
Frequency Response	38Hz - 125Hz +/-3dB
Impedance	6 Ohms nominal, 4 Ohms minimum
Sensitivity	87dB SPL (2.83v/1 meter)
Power Handling	50 Watts minimum; 150 Watts maximum
Dimensions (WxDxL)	11" x 3.375" x 39.375" (279mm x 86mm x 1000mm)
Port Tube Dimensions (DiaxL)	3" x 15" (76mm x 381mm)
Shipping Weight	40 lbs (18.68 kg)

ASSOCIATED VISUAL PERFORMANCE PRODUCTS

VP38R Round Replacement Grille / Each	93122	VP3SQ Square Adapter w/ Grille / 10 Pack per Box	93121
VP3SQ Square Adapter w/ Grille / Each	93120	VP3 Round Flex Bracket / 10 Pack per Box	93119

ASSOCIATED ARCHITECTURAL SERIES PRODUCTS

1/2" Gypsum TL MP AS Discreet Round / Each	93362	5/8" Gypsum TL MP AS Discreet Round / Each	93364
1/2" Gypsum TL MP AS Discreet Square / Each	93363	5/8" Gypsum TL MP AS Discreet Square / Each	93365
		SS TL Mounting Hardware AS Rd or Sq / Each	93366

ASSOCIATED PRODUCTS


Sonamp 2-100 / Each	93091	Sonamp DSP 2-150 MKII / Each	93378
Sonamp 12-50 / Each	93092	Sonamp DSP 8-130 MKII / Each	93331

LIMITED FIVE (5) YEAR WARRANTY Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for the period stated above. Sonance will at its option and expense during the warranty period, either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent. For more details please refer to the product manual.

©2021 Sonance. All rights reserved. Sonance is a registered trademarks of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website at www.sonance.com.

SONANCE • 991 Calle Amanecer • San Clemente, CA 92673 USA • Phone: (949) 492-7777 • Fax: (949) 361-5151 • Technical Support: (949) 492-7777 • www.sonance.com 08.20.2021

BPS6 TL DIMENSIONAL DRAWINGS

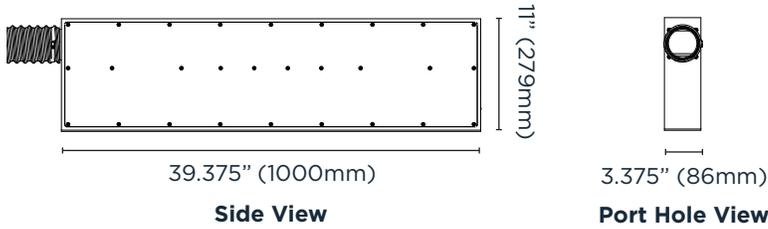


BPS6 TL
93324

Dimensions (WxDxL)
11" x 3.375" x 39.375"
(279mm x 86mm x 1000mm)

Port Tube Dimensions (DiaxL)
3" x 15" (76mm x 381mm)

VPBPC3R TL DIMENSIONAL DRAWINGS

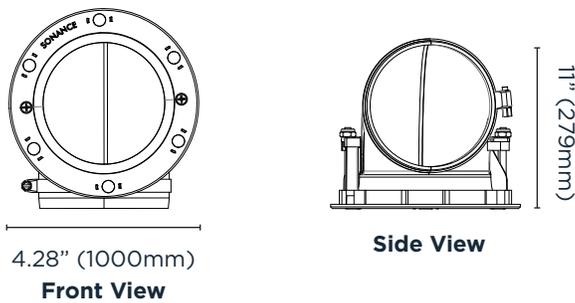


VPBPC3R TL BANDPASS CONNECTOR
93334

Dimensions (DiaxD)
4.28" x 3.844" (109mm x 98mm)

Cut Out Dimensions (Dia)
3.875" (99mm)

Grille Dimensions (WxH)
4.844" x 4.844" (124mm x 124mm)


AS DIMENSIONAL DRAWINGS

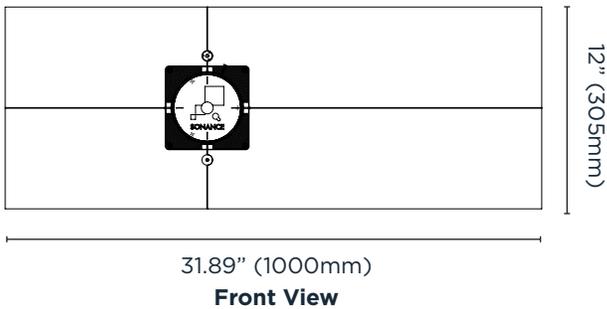

TL MOUNTING PLATFORM
93362, 93363, 93364, 93365, 93366

Dimensions (WxHxD)
31.89" x 12" x 3.39"
(810mm x 305mm x 86mm)

ASBPC3RS TL DIMENSIONAL DRAWINGS

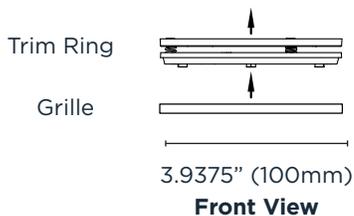

ASBPC3RS TL TRIM RING AND GRILLES
93335

Dimensions (DiaxD)
3.9375" x 3.9375" (100mm x 100mm)