




DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:

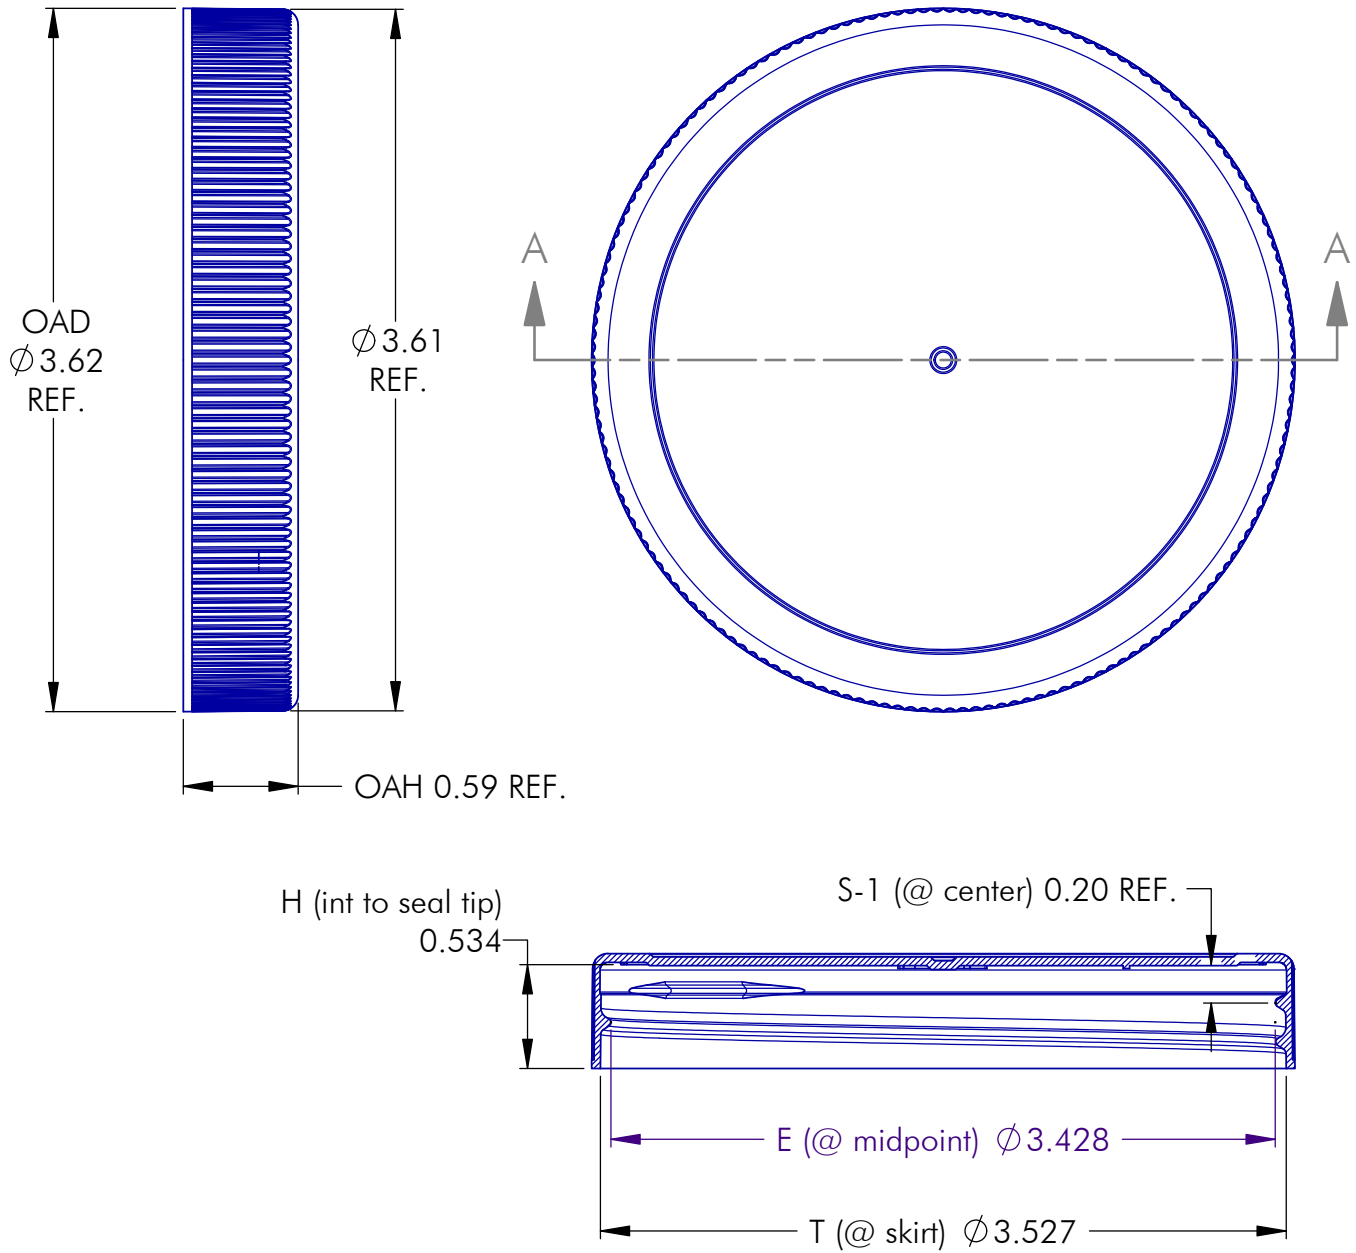

REF NO.:

DWG31542

DESCRIPTION:

89-400 PP Screw Cap, Ribbed Sides Matte Top, with Heat Seal for PET



Specifications:

DIAMETER 89 mm

THREAD PROFILE 400

NECK FINISH 89-400

CLOSURE TOP Stipple

CLOSURE SIDEWALL Fine Ribbed

MATERIAL PP

PACKAGING & FREIGHT INFORMATION

PACK TYPE	PCS/CTN	CTNS/PALT	PCS/PALT	CTN WT*	PALT WT*	FRT CLASS
Stack	624	15	9,360	20 ⁽¹⁾	296 ⁽¹⁾	125 ⁽¹⁾
Stack	624	15	9,360	23 ⁽²⁾	296 ⁽²⁾	125 ⁽²⁾
CARTON DIMENSIONS: 24 x 16 x 15			PALLET DIMENSIONS: 48 x 40 x 50			

(1) Unlined Closures (2) Lined Closures *Approximate

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG31542


DESCRIPTION:

89-400 PP Screw Cap, Ribbed Sides Matte Top, with Heat Seal for PET

FoilSeal™ Technical Data Sheet

.008" C1S FS 3-25

Revision: FS325-09252013

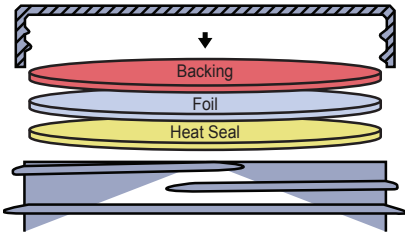Product	.008" C1S FS 3-25														
Scope	One piece board backed heat induction foil innerseal will provide an aggressive bond with clean peel removal from PET and PVC containers. (.0005" foil version of FS 3-19). Easy access / "puncture foil" when wax bonded to pulp.														
Composition	<table><thead><tr><th>Material</th><th>Standard</th><th>Metric</th></tr></thead><tbody><tr><td>Backing</td><td>.008"</td><td>.2032mm</td></tr><tr><td>Foil</td><td>.0005"</td><td>.0127mm</td></tr><tr><td>Heat Seal</td><td>.0005"</td><td>.0127mm</td></tr></tbody></table>	Material	Standard	Metric	Backing	.008"	.2032mm	Foil	.0005"	.0127mm	Heat Seal	.0005"	.0127mm		
	Material	Standard	Metric												
Backing	.008"	.2032mm													
Foil	.0005"	.0127mm													
Heat Seal	.0005"	.0127mm													
Adhesive or resin bonding layers not shown.															
FDA Status: 21 CFR 177.1210		Recommended Storage and Handling: Refer to Website													
Drug Master File (DMF): #4544		EU / EP Reg.:													
GTR Oxygen: Essentially Zero		MVTR: Essentially Zero													
Print Location (if any): Heat Seal Layer and/or Backing															

Selig materials are compliant with current USFDA Food allergen Guidelines.
Selig materials are compliant with California Proposition 65 labeling requirements.
Selig materials are compliant with limitation of heavy metals in packaging per CONEG & EU 94/62/EC, article 11.

DISTRIBUTED BY:



REF NO.:

DWG31542

DESCRIPTION:

89-400 PP Screw Cap, Ribbed Sides Matte Top,
with Heat Seal for PET

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.