

# 1-1/2"-2" Air Admittance Valve

<b>Job Name</b> _____
<b>Location</b> _____
<b>Engineer</b> _____
<b>Contractor</b> _____
<b>Tag</b> _____ <b>PO#</b> _____

### Specifications

- Constructed of plastic
- Designed to prevent sewer gases from entering the DWV piping system
- Installed O-ring prevents the need for Teflon tape during install
- Adapter included for solvent welding to PVC/ABS pipe
- Fits 1-1/2" to 2" pipe
- Maximum pressure of 15 psi
- 3 year limited warranty

### Materials


- PVC
- ABS



### Dimensions and Product Offering

Part Code	DFU	Material	Description	A	B	C	D
<b>P15006</b>	20	PVC	AAV vents up to 20 Branch DFU and 8 Stack DFU	3.47"	2.02"	2.22"	1.95"
<b>P15006A</b>	20	ABS	AAV vents up to 20 Branch DFU and 8 Stack DFU	3.47"	2.02"	2.22"	1.95"
<b>P15020</b>	160	PVC	AAV vents up to 160 branch DFU and 24 stack DFU	3.47"	2.02"	2.22"	1.95"
<b>P15020A</b>	160	ABS	AAV vents up to 160 branch DFU and 24 stack DFU	3.47"	2.02"	2.22"	1.95"

Drain Branch/Stack Size	Max DFUs on Branch	Max DFUs on Stack
1-1/2"	3	6
2"	6	24
3"	20	72
4"	160	500

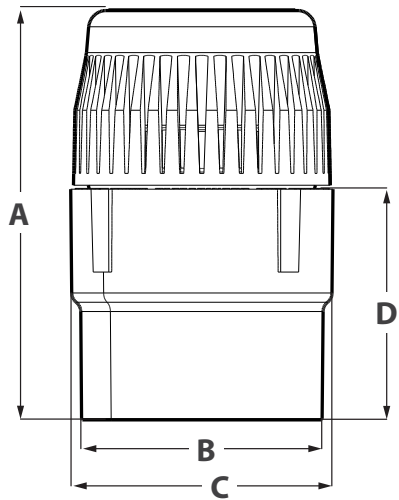

### Certifications/Listings/Approvals

- NSF/ANSI 14
- ASSE 1050/1051
- Conforms to IPC 2021 918.1
- Conforms to IRC P3114.1
- Conforms to UPC 2021 301.3
- Adapters conform to ASTM D2661/D2665

