

KA11

11 inch Countertop/On-Wall Touchpanel

The KA11 touchpanel provides simple, intuitive control of the entertainment, environment, security, and related systems in residential or commercial settings. The sleek touchpanel features a fully customizable 11.6" high-definition widescreen display with an integrated capacitive touchscreen for swiping through pages and menus. The innovative KA11 is programmable in landscape or portrait mode and comes equipped with sensors to automatically wake the unit and adjust the screen brightness as a user approaches.

Wall-mount installation is easy using the included wall bracket, while an accessory stand is available for countertop installations. A single Ethernet-connected Cat-5/6 cable can both power the unit and enable control of the RTI ecosystem.

Key Features

- 11.6" widescreen LCD with 1920x1080 Full HD resolution and integrated capacitive touchscreen, supporting multi-touch and gesture.
- Fully customizable interface can be programmed for both portrait and landscape mode installations.
- Design enables wall mount installation in dual gang electrical box and table top installation using stand accessory (sold separately).
- Ambient light and proximity sensor adjusts the screen brightness and LED backlights automatically according to the environmental light level.
- Powered by PoE (Power over Ethernet) or a power supply (sold separately).
- Gigabit Ethernet with PoE enables two-way control via the RTI control system, video from IP security cameras, and remote programming updates.
- KA11-to-door-station support enables answering the door from the touchpanel via the built-in video intercom.



Installation Options



Countertop installation with accessory table stand




On-wall installation uses two-gang wall bracket and adapter

Specifications

Power (Power Supply not included).....	+24V DC, 1A or PoE
Power Management	Adjustable backlight/ proximity sensor
Touchscreen Display.....	High-brightness color IPS LCD
.....	Full HD (1920x1080 pixels) with 16.7M colors
.....	Integrated high-resolution projected capacitive touchscreen
Display Size	11.6in (294mm) diagonal
Display Backlight	LED Backlit, 350nit
Ethernet Port	RJ-45, 10/100/1000 Base-T with Power-over-Ethernet
Camera	Color CMOS, 8MP, 30FPS
Microphone	Built-in microphone
Speakers.....	Two (2), Stereo 2 Watt
Total System Memory.....	2GB DDR3, 8GB eMMC Flash
Device Capability.....	Total number of devices is limited only by memory
Macro Capability.....	Total number of macros is limited only by memory
Operating Temperature.....	+32°F to +122°F (0°C to +50°C)
Operating Humidity	5% to 95% Non-condensing
Mounting	Tabletop with Aluminum Stand or Wall-Mount
Installation	US standard 2 gang low voltage bracket (included)
Outer Bezel Dimension (W x H)	12.4in (313mm) x 7.9in (201mm)
Depth in Wall	0.83in (21mm)
Warranty	Three Years (Parts & Labor)

All Specifications subject to change without notice.

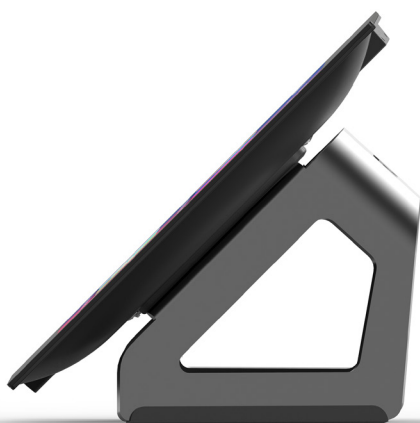

RTI User Interfaces

Remote Controls In-Wall Touchpanels
Keypads Tabletop Touchpanels
Audio Control Keypads Mobile Apps



RTI Control and Accessories

Control Processors IR Modules
System Kits Relay Modules
RS-232 Modules Z-Wave Modules



RTI Audio/Video Distribution

HDMI Splitters & Switchers HDBaseT™ Extenders
HDMI Matrix Switchers Presentation Switchers
HDBaseT™ Matrix Switchers Video over IP Transceivers



Remote Technologies Incorporated

5775 12th Avenue East, Suite 180, Shakopee, MN 55379

PH: (952) 253-3100 • Website: www.rticorp.com



It's Under Control®