Location:

SYMMONS® Origins®



Kitchen Faucet
S248
Specification Submittal

Feature Highlights






- Origins Two Handle Kitchen Faucet with quarter turn ceramic control components
- 8-5/8 inch swing spout with aerator
- 1/2 inch IPS shanks, 8 inch centers
- Standard 1.5 gpm (5.7 L/min) flow rate
- Metal contruction
- Polished chrome finish (standard)

Standards / Certifications

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372
ADA Compliant Lever Handles

C US

S248 Faucet Handle Options

S2481 LAM	S248 LAM	S248 LPO	S248 LWG	S248 (blade)
				

Model Numbers

Requires appropriate handle selection

- ☐ S2482 Faucet with swing spout, aerator, hose and handspray
- ☐ S2481 Faucet with swing spout and swivel spray aerator
- ☐ S248 Faucet with swing spout

Handle Selection

Requires selecting handle and appending suffix code as appropriate

- ☐ LAM Metal insert lever handles
- ☐ LPO White insert lever handles
- ☐ LWG Wrist blade handles
- ☐ (-) Blade handles (no suffix code letters appended to model number)

Finish Options / Modifications

Append appropriate suffix to model number

- \- Polished chrome (standard)
- ☐ STN Satin nickel

Options / Modifications

Append appropriate suffix to model number

- ☐ CG 05 Aerator flow restrictor, 0.5 gpm (1.9 L/min)
- ☐ CG 10 Aerator flow restrictor, 1.0 gpm (3.8 L/min)
- ☐ NA Non-aerated laminar flow outlet, flow rate 1.0 gpm (3.8 L/min)

Warranty

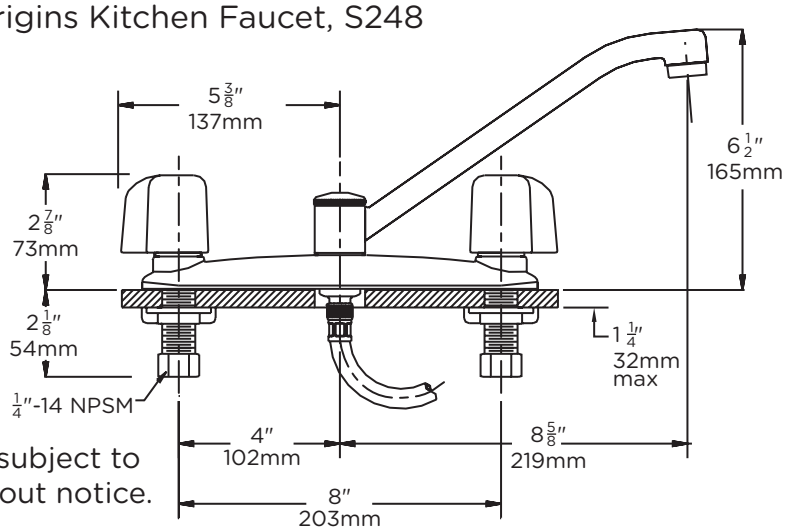
Limited Lifetime - to the original end purchaser in consumer/residential installations.

10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.

Architectural/ Engineering Specification


Symmons Origins Faucet _____ with Two Handle Kitchen Faucet with quarter turn ceramic control components, 8-5/8 inch swing spout with aerator, 1/2 inch IPS shanks, 8 inch centers, Standard 1.5 gpm (5.7 L/min) flow rate, Metal contruction, Polished chrome finish (standard). 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372 , ADA Compliant lever handles complaint. Available options include: "05 - Aerator flow restrictor, 0.5 gpm (1.9 L/min)","VP - Vandal resistant aerator, 1.0 gpm (3.8 L/min)", "NA - Non-aerated laminar flow outlet, flow rate 1.0 gpm (3.8 L/min)", "STN - Satin nickel"

Dimensions Origins Kitchen Faucet, S248




Note: Dimensions subject to change without notice.

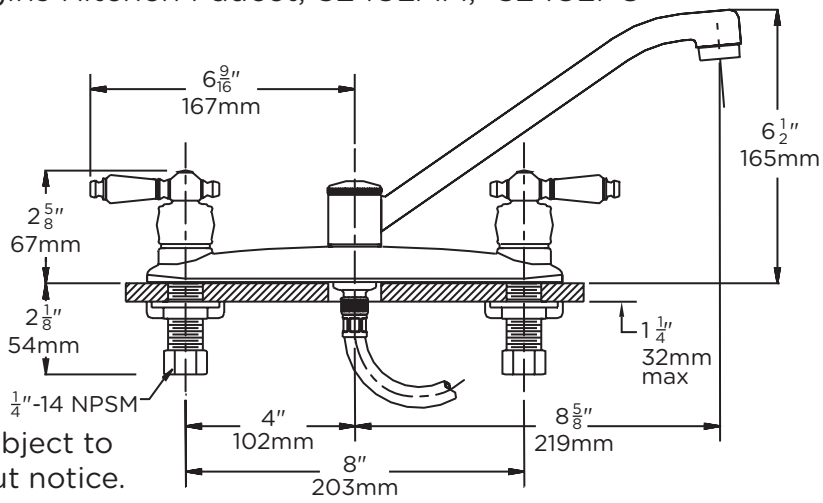Dimensions Origins Kitchen Faucet, S248LAM, S248LPO



Note: Dimensions subject to change without notice.

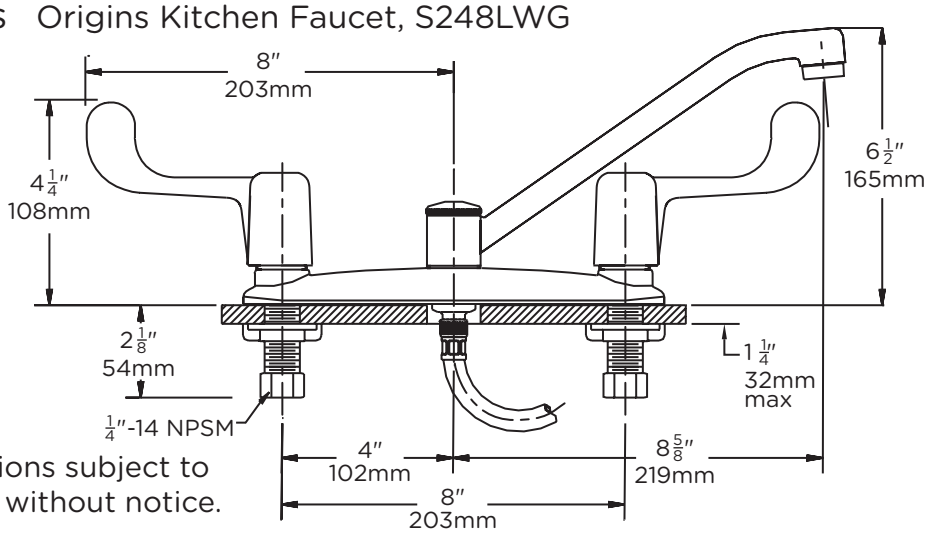Dimensions Origins Kitchen Faucet, S248LWG



Note: Dimensions subject to change without notice.

Symmons Industries, Inc. ▪ 31 Brooks Drive ▪ Braintree, MA 02184
Phone: (800) 796-6667 ▪ Fax: (800) 961-9621
Website: symmons.com ▪ Email: gethelp@symmons.com

Copyright © 2019 Symmons Industries, Inc. ▪ ZV-1721 REV E ▪ 122622

Emplacement:

SYMMONS® Origins®

Robinet de cuisine S248



Présentation des spécifications






Principales caractéristiques

- Robinet de cuisine Origins à deux poignées avec des composants de contrôle en céramique de type quart de tour
- Bec pivotant de 8-5/8 pouces avec aérateur
- Tiges IPS de 1/2 pouce, centres de 8 pouces
- Débit standard de 1,5 gpm (5,7 l / min)
- Construction métallique
- Finition chromée polie (standard)

Normes/certifications

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372
Poignées en levier conformes à la norme

Options de poignée de robinet S248

S2481 LAM	S248 LAM	S248 LPO	S248 LWG	S248 (lame)
				

Numéros de modèles

Nécessite la sélection de la poignée selon le cas

- ☐ S2482 Robinet avec bec pivotant, aérateur, boyau et douchette
- ☐ S2481 Robinet avec bec pivotant et aérateur de pulvérisation pivotant
- ☐ S248 Robinet avec bec pivotant

Options/modifications du fini

Joindre le suffixe approprié au numéro de modèle

- ☐ STN Nickel satiné

Sélection de la poignée

Joindre le suffixe approprié au numéro de modèle

- ☐ LAM Poignées en levier avec insert métallique
- ☐ LPO Poignées en levier avec insert blanc
- ☐ LWG Poignées à lame coudée
- ☐ (-) Poignées à lame (pas de lettres de code de suffixe jointes au numéro de modèle)

Options/modifications

Joindre le suffixe approprié au numéro de modèle

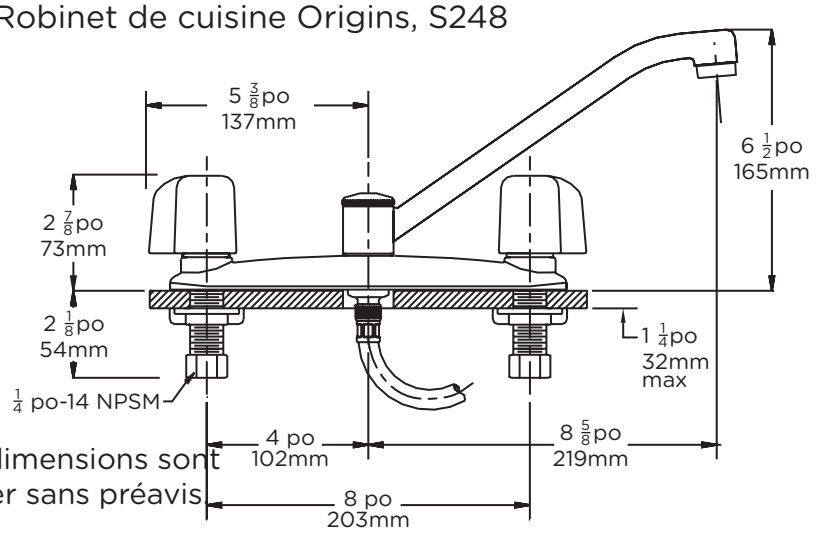
- ☐ CG 05 Aérateur avec réducteur de débit de 1,9 L/min
- ☐ CG 10 Aérateur avec réducteur de débit de 3,8 L/min
- ☐ NA Sortie à flux laminaire non aéré, débit de 3,8 L/min

Garantie

Garantie limitée - à l'acheteur original dans les installations du consommateur/résidentiel.


10 Ans - pour les installations commerciales/industriel. Se reporter au www.symmons.com/warranty pour l'information complète concernant la garantie.

Dimensions Robinet de cuisine Origins, S248




Remarque: Les dimensions sont sujettes à changer sans préavis

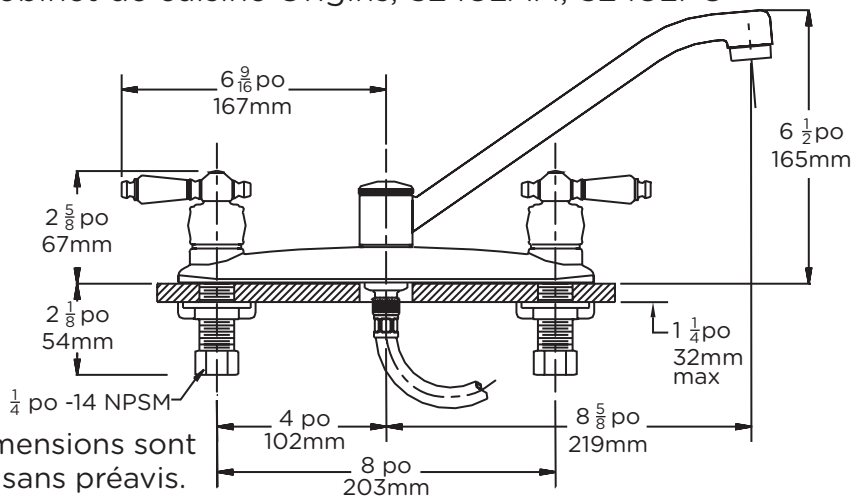Dimensions Robinet de cuisine Origins, S248LAM, S248LPO



Remarque: Les dimensions sont sujettes à changer sans préavis.

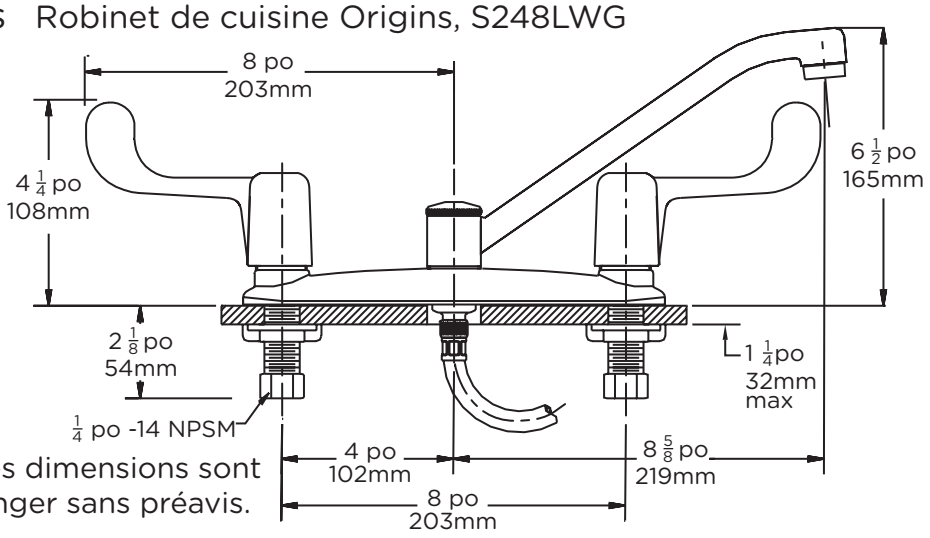Dimensions Robinet de cuisine Origins, S248LWG



Remarque: Les dimensions sont sujettes à changer sans préavis.

Symmons Industries, Inc. ▪ 31 Brooks Drive ▪ Braintree, MA 02184
Phone: (800) 796-6667 ▪ Fax: (800) 961-9621
Website: symmons.com ▪ Email: gethelp@symmons.com

Copyright © 2019 Symmons Industries, Inc. ▪ ZV-1721 REV E ▪ 122622