



MARBLE LOOK



















FOYER™

Make a grand entrance with our 100th anniversary benchmark collection, Foyer. This striking marble look tile will create a lasting impression with bold veining in three commanding colors, combined with the durability of ColorBody™ porcelain. Achieve your high-end dreams, complete with decorative mosaics and extra-large size offering; a series so special, it needed 100 years of American Olean craftsmanship to design.



Cover photo features Foyer™ Contrast 24 x 48 matte on the floor & wall and Contrast 3" Hexagon mosaic matte surrounding the bath tub. Above photo features Foyer™ Steely 12 x 24 matte on the floor and Conrad Brick™ Linen 2 x 8 glossy on the fireplace.

FINISHES: MATTE | POLISHED

USAGE  FLOOR  WALL  COUNTERTOP  SHOWER FLOOR  EXTERIOR FLOOR	MATERIAL 	PRICING 	SPECIAL FEATURES  STEPWISE™  TRUEEDGE™  MADE IN THE U.S.A.  LARGE FORMAT  MOSAIC/DECO  ENCAUSTIC  TERRAZZO  PAVER  CUSTOMIZE
--	--	---	--

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

MARBLE LOOK


FLOOR TILE



SUMMIT FY02



CONTRAST FY03

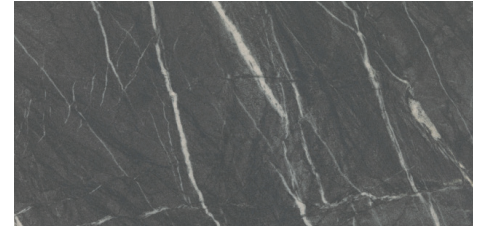

STEELY FY04

3" LANDMARK HEXAGON MOSAIC



SUMMIT FY02




CONTRAST FY03




STEELY FY04


3" HEXAGON MOSAIC

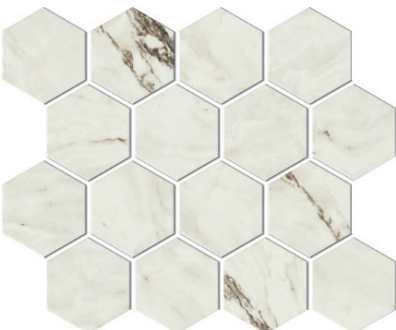

SUMMIT FY02

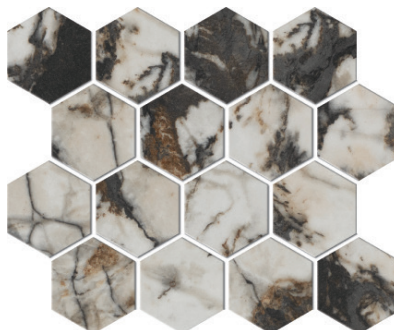

CONTRAST FY03

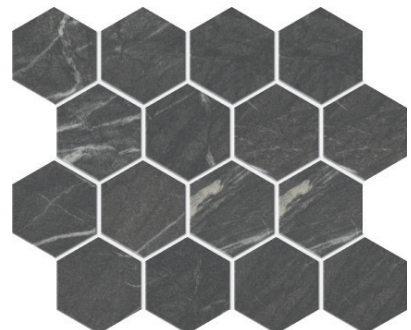

STEELY FY04

-  SLIP RESISTANT
-  WATERPROOF
-  STAINPROOF
-  DENTPROOF
-  SCRATCH-RESISTANT
Applicable to products with Matte and Textured Finishes
-  FIRE-RESISTANT
Not Applicable to Mesh-Mounted Mosaic
-  CLIMATEPRO™
-  SIMPLICLEAN™

VISIT AMERICANOLEAN.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

FINISHES: MATTE | POLISHED

USAGE




MATERIAL



PRICING



SPECIAL FEATURES



NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

MARBLE LOOK

SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	24 x 48 Floor Tile	23-3/8" x 46-7/8" (59.44 cm x 119.20 cm)	5/16"	15.26	2
	12 x 24 Floor Tile	11-5/8" x 23-3/8" (29.56 cm x 59.44 cm)	5/16"	17.02	9
	3" Hexagon Mosaic* (Mesh-mounted)	12-1/8" x 14-5/8" Sheet (30.80 cm x 37.15 cm Sheet)	5/16"	6.24	6
	3" Landmark Hexagon Mosaic** (Mesh-mounted)	17" x 11-1/2" Sheet (43.18 cm x 29.21 cm Sheet)	5/16"	4.92	6

* 3" Hexagon Mosaic available in Matte finish only.

** 3" Landmark Hexagon Mosaic available in Polished finish only.

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●*
Shower Floors (Residential or Light Commercial)	≥ 0.42	●**
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	●***
Ramps & Inclines	≥ 0.65	●***
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	●***

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

* Matte finish only.

** 3" Hexagon Mosaic only.

*** Mosaic tile only.

TRIM

			NUMBER	PIECES/ CARTON
	Floor Bullnose	3 x 24	P43F9	10

INSTALLATION

Grout Joint Recommendation	Shade Variation
<p>Floor: 1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)</p> <p>Mosaic: 1/8"</p>	<p>RANDOM (V4)</p>

PERFORMANCE CHARACTERISTICS

	ASTM#	RESULTS
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs.
Scratch Hardness	MOHS	8.0 (Matte) 6.0 (Polished)
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: americanolean.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms	3	All Residential / Light Commercial
2 All Residential Areas	4	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: americanolean.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to americanolean.com/LargeTiles for more information.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values < 0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at www.tileusa.com.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

FEATURES



MADE IN THE U.S.A.



REVEAL IMAGING®



All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.

888.AOT.TILE



AMERICAN OLEAN®
PROVEN IN TILE™