
John Richard

Assembly Instructions for Item #AJC-9108

Thank you for purchasing this quality product. Be sure to check all packing materials carefully for small parts that may have come loose inside the carton during shipment. Carefully unpack and inspect each piece of your new chandelier. Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware. To Prevent the Risk of Injury do not attempt to install this if any piece is missing or damaged.

IMPORTANT: FOR A SAFE AND SECURE INSTALLATION, THESE FIXTURES MUST BE INSTALLED BY MEANS OF SUPPORTS THAT ARE INDEPENDENT OF THE OUTLET BOX. WARNING: BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS SHUT OFF. This light fixture requires installation by a person familiar with the codes and restrictions in your area. We recommend installation by a licensed electrician. ***Caution: Please carefully read all instructions before starting the assembly process. For your safety, two people are required for proper assembly and installation. This fixture has been rated for up to Fifteen (15) 40-Watt maximum Type G9 bulbs (included).

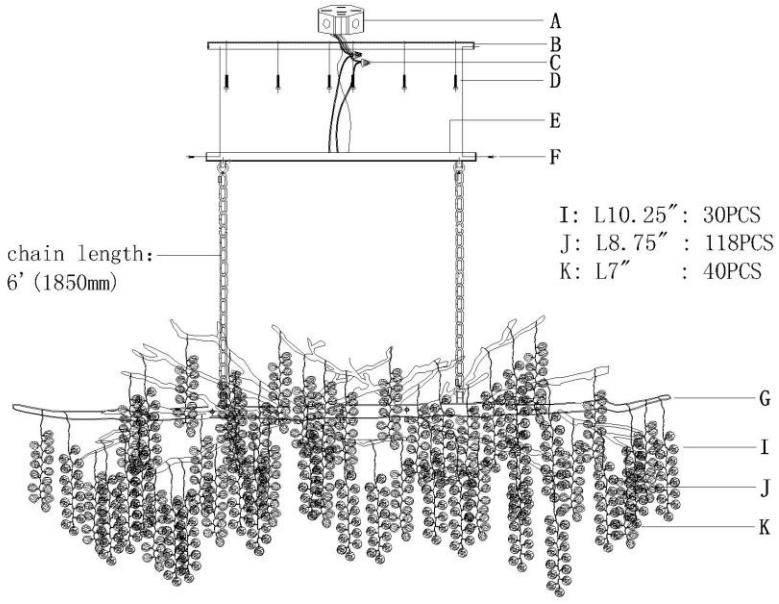

(INCLUDED).

Assembly Step:

1. Please attach Cross Plate (B) to the Outlet box (A) not included using the Outlet box Screws (D).
2. Please connect the wires and then cover then cover the tie-in with the Wire nuts (C).
3. Please attach the Canopy (E) to cross bar and tighten both sides using screws (F).
4. Attach glass strings (I) 30 PCS, (J) 118PCS, and (K) 40PCS to the body (G).
5. Recommend bulb wattage: 40-watt 15 type G9 Bulbs

NOTE: DO NOT EXCEED RECOMMENDED WATTAGE.