

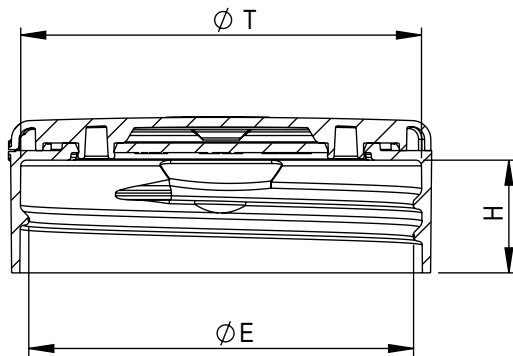
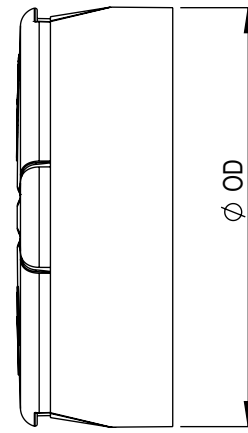


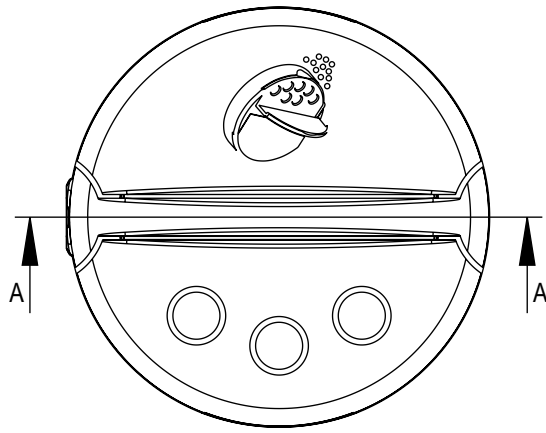

SECTION A-A

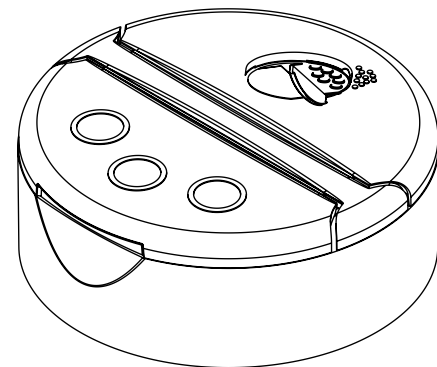

STATIC TORQUE RECOMMENDATION: 21-36 in-lbs
 REQUIREMENT MAY VARY DEPENDING UPON CONTAINER MATERIAL,
 NECK FINISH, AND CAPPING EQUIPMENT

REFERENCE	TOLERANCE	DIMENSION	UNITS
E	±0.012 [0.30]	2.002 [50.85]	in [mm]
T	±0.012 [0.30]	2.087 [53.01]	in [mm]
H	±0.012 [0.30]	0.581 [14.76]	in [mm]
OD	±0.015 [0.38]	2.193 [55.70]	in [mm]
OAH	±0.012 [0.30]	0.793 [20.14]	in [mm]
PART WEIGHT	± 0.70	9.51	g
OPENING FORCE	± 2.0	3.5	lbf
THREAD DETAIL INFORMATION: 6 THREADS PER INCH 0.167" [4.24] PITCH 540° FULL DEPTH THREADS			

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITY TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG31911

DESCRIPTION:

53-485 PP Spice Cap Dual Pour & Spoon with PS-20 Liner

PRODUCT DATASHEET

PRESSURESEAL 20

NA

- PressureSeal 20 is an inner seal with a construction of polystyrene foam coated with pressure sensitive adhesive
- The US FDA does not consider liners applied with pressure sensitive adhesive to be an effective tamper-resistant feature
- Recommended for use with dry products only
- Available with standard or custom print

Construction¹

Thickness SI (µm)		Thickness US (mils)
508,0 50,8 – 76,2		20.0 2.0-3.0

Properties

Characteristic	SI	US
Color	White	White
Oxygen Transmission	Not tested	Not tested
Moisture Vapor Transmission	Not tested	Not tested
Thickness Tolerance	± 10%	± 10%
Available Widths	25,4 – 1016,0 mm	1.0 – 40.0 in
Width Tolerance	± 1,6 mm	± 0.0625 in

Product Attributes

- Does not require specialized equipment to seal
- Modest protection against dry product leakage in transit
- Good compressibility

DISTRIBUTED BY:



REF NO.:

DWG31911

DESCRIPTION:

53-485 PP Spice Cap Dual Pour & Spoon with PS-20 Liner

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITY TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.