


FRONT VIEW

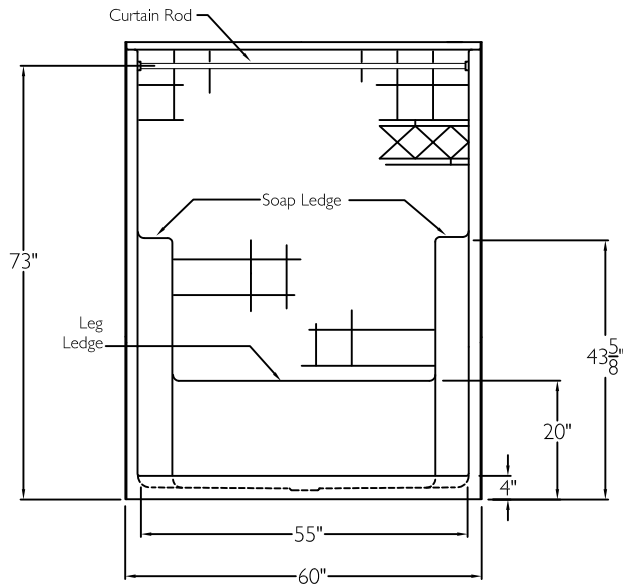

SUBMITTAL

This shower enclosure shall be model XST 6033 SH NS 4.0" left or right. Finished surface shall be of a sanitary grade AcrylX™ applied acrylic.

Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 60" x 33" x 77 1/2".


The unit shall meet ANSI Z124.1-2, BOCA, UPC, CSA, Home Innovation Research Lab, and shall meet the requirements of the Southern Building Code.

HANDED BY THE CENTER


The enclosure shall be equipped with the following accessories:

- 1) Molded corner soap dishes,
- 2) Molded leg ledge,
- 3) Tile finish,
- 4) Diamond accents,
- 5) One inch diameter white curtain rod with receiver cups,
- 6) Tri-Cell backing,
- 7) 4.0" Threshold.

SIDE VIEW

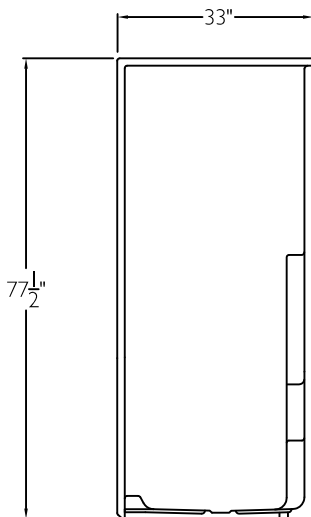

TOP VIEW

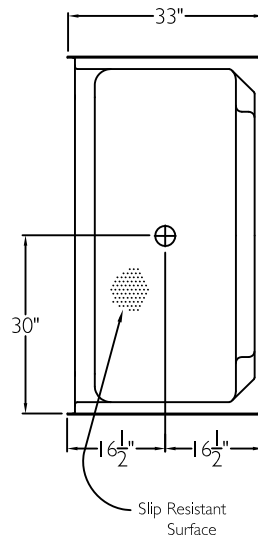

THIS UNIT FEATURES THE OUTSIDE DIMENSION OF 60" OF OVERALL WIDTH. THIS DOES NOT ALLOW FOR FULL ENCLOSURE OF THE BOLTS AND NUTS USED TO SECURE THE BARS AND SEAT IN PLACE. THE BOLT AND NUT COMBINATION SHOULD NOT PROTRUDE MORE THAN 3/4" ON EITHER SIDE OF THE SHOWER WALLS. THIS MAY REQUIRE THE NEED TO NOTCH STUDS TO ALLOW BOLT CLEARANCE FOR A DRYWALL ENCLOSED FIRE WALL INSTALLATION. ADJUSTMENT OF THE WALL BOARD MAY BE NECESSARY TO PROVIDE CLEARANCE OF THE BOLT(S) WHILE MAINTAINING THE INTEGRITY OF THE DRYWALL ENCLOSED FIRE WALL ENCLOSURE.

Job Name	Approved By Print Name		Date	COMFORT DESIGNS	
Project No	Approved By Signature			Model No. XST 6033 SH NS 4.0-I	
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com	Architect			Drawing No. XST 6033 SH NS 4.0 WCR	
	Engineer			Date Issued. 6-14-12	Drawing Rev. 6-1-17
	Rep			Material. AcrylX™ applied acrylic	
	Wholesaler			Color.	
	Comments				Dimensions are in inches. Due to the nature of the materials dimensions may vary ± 1/2"