JVM1631BK/CK/WK

GE Spacemaker® Over-the-Range Microwave Oven

Dimensions and Installation Information (in inches)


Note: Requires 120V grounded outlet. Electrical receptacle must be located in cabinet above Spacemaker microwave oven. No additional wiring, venting or cabinet rebuilding necessary in many cases. Complete detailed, easy-to-follow installation instructions and convenient full-size templates are packed with the Spacemaker microwave oven.

Important Information: When installing the Spacemaker microwave oven over a range, allow minimum of 2" from bottom of Spacemaker microwave oven to top of range backguard to allow for removal of light covers.

Ventilation Options: The Spacemaker microwave ovens and Spacemaker convection/microwave ovens are designed for adaptation to the following three types of ventilation:

- Outside exhaust (Vertical – as shown)
- Outside exhaust (horizontal)
- Recirculating (non-vented ductless – see Filter Kit drawing)


Installation Information: This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.

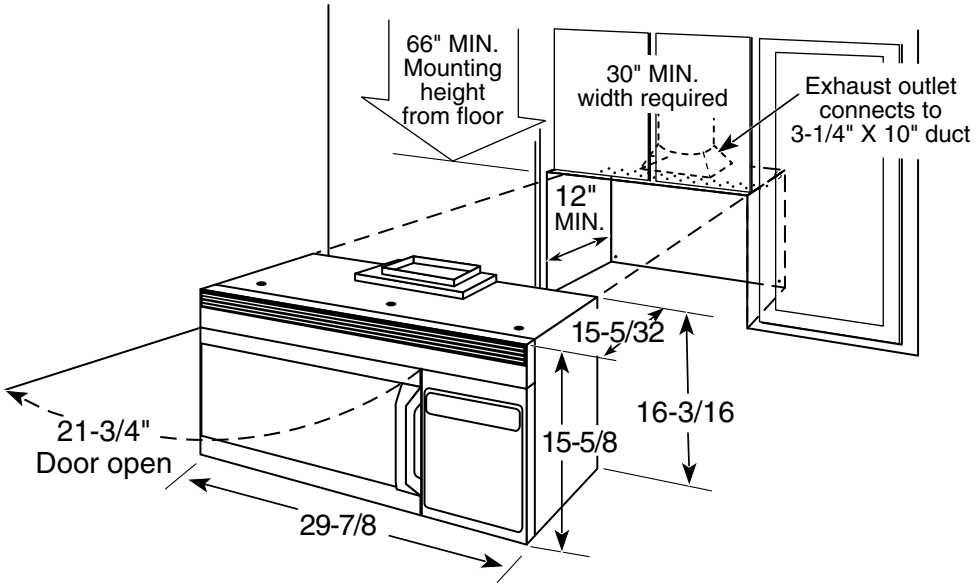

Optional accesories
(Available at additional cost)

Filler Panel Kits
JX48BL–Black
JX48WH–White

When replacing a 36" range hood, this kit fills in the additional width to provide a custom built-in appearance. For installation between cabinets only; not for end-of-cabinet installation. Each kit contains two 3"-wide filler panels.

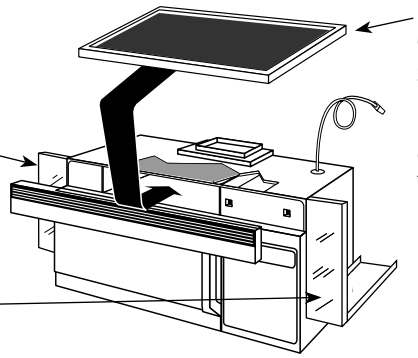

Recirculating
Charcoal Filter Kit

See below for part numbers. Spacemaker microwave oven cannot be vented to the outside.

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.

imagination at work

Listed by Underwriters Laboratories


Specification Created 5/05 340128

JVM1631BK/CK/WK

GE Spacemaker® Over-the-Range Microwave Oven

Features and Benefits

- 1.6 cu. ft. capacity - 1000 Watts (IEC-705 test procedure)
- Convenience cooking controls - Allows cooking and reheating at the touch of a button
- Turntable - Continually rotates food to ensure even cooking
- Auto and Time Defrost - Automatically defrosts for a specified amount of time
- 10 Power Levels - Offer maximum cooking flexibility, from warming and reheating, to the full speed of microwave cooking at high power
- Full-View Cooktop Lighting - Illuminates the cooking surface below
- Two-speed, 300-CFM venting system (with recirculating exhaust fan) - Quickly removes the smoke and steam from the cooktop
- Model JVM1631WK – White on white
- Model JVM1631BK – Black on black
- Model JVM1631CK – Bisque on bisque

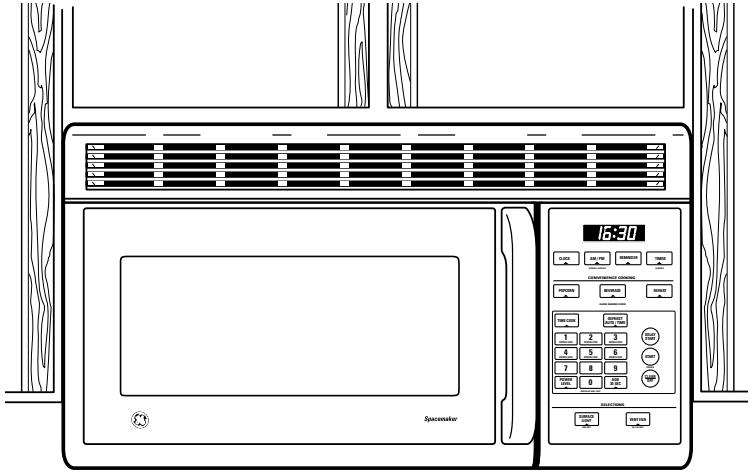

imagination at work

Specification Created 5/05 340128