
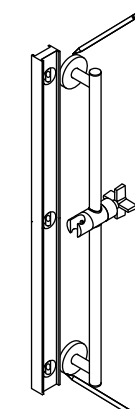
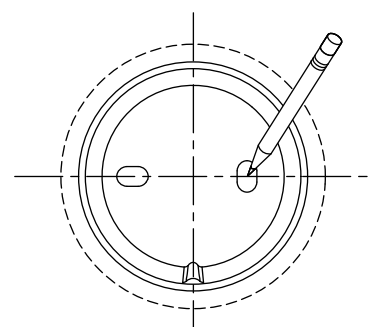


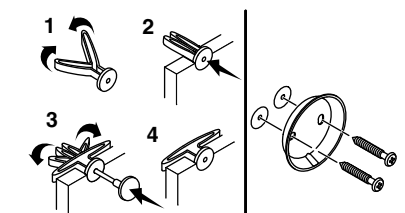




<p><b>Record your model number.</b></p>	<p><b>⚠ CAUTION: Risk of personal injury.</b> Do not install where the product might be used as a grab or support bar.</p>	<p><b>Important Information</b> These products should be located and mounted to a wall stud. While it is possible to mount to any surface, a stud-mounted product will yield the best results.</p>	<p><b>1 For All Installations:</b> Loosen the setscrews and remove the wall plates from the sidebar.</p> 	<p><b>2</b> Position and verify that the sidebar is plumb. Trace the top and bottom mount locations.</p> 	<p><b>3</b> Center the wall plates within the outlines and mark the hole locations.</p> 
<p><b>4</b> Verify that the top and bottom marks are plumb. Adjust as necessary.</p> 	<p><b>5 Drywall Into Studs:</b> Drill 1/8" holes. Secure each wall plate with the notch at the bottom.</p> 	<p><b>Drywall Between Studs:</b> Drill 5/16" holes. Use the provided pin to install the drywall anchors. Secure each wall plate with the notch at the bottom.</p> 	<p><b>Ceramic Tile:</b> Drill 1/4" holes. Insert ceramic anchors. Secure each wall plate with the notch at the bottom.</p> 	<p><b>6</b> Position the sidebar on the wall plates. Tighten the setscrews.</p> 	<p><b>To Adjust and Tighten the Bracket</b> To adjust the bracket, loosen the handle and move to the desired location. If the bracket will not stay in place, loosen the setscrew, tighten the screw, and retighten the setscrew.</p> 