

SONANCE

VISUAL PERFORMANCE DATA SHEET

VP52RUTL


TECHNICAL SPECIFICATIONS

SKU	VP52RUTL 93368
UOM	Pair
Tweeter	1" (25mm) cloth dome, Ferrofluid cooled, acoustic back chamber
Woofers	5.25" (133mm) polypropylene cone, rubber surround
Frequency Response	75Hz - 20kHz +/-3dB
Impedance	8 Ohms nominal; 6 Ohms minimum
Power Handling	5 watts minimum; 80 watts maximum
Inputs	89dB SPL (2.83v/1 meter)
Grille Material	Perforated steel
Dimensions (DiaxD)	9.75" x 1.4375" (248mm x 36.2mm)
Cut-Out Dimensions (DiaxD)	8.25" x 1.4375" (210mm x 36.2mm)
Grille Dimensions (WxH)	9.875" x 9.875" (250mm x 250mm)
Shipping Weight	9 lbs (4.1 kg) pair

ASSOCIATED PRODUCTS


Medium Round Flex Bracket / 5 Pair	92337	VP6SQ Square Adapter w/ Grille / Pair	93030
Medium Round Coverplate / Pair	92335	VP6SQ Square Adapter w/ Grille / 5 Pair	93033

DIMENSIONAL DRAWINGS




9.75" (248mm)

Front View



1.4375" (36.2mm)

Side View

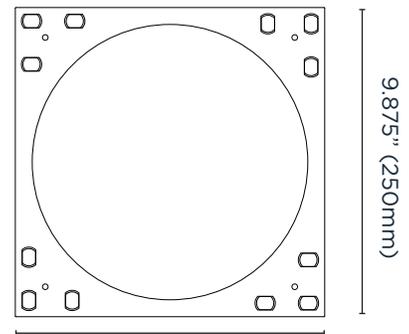

9.875" (250mm)

Grille

LIMITED FIVE (5) YEAR WARRANTY Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for the period stated above. Sonance will at its option and expense during the warranty period, either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent. For more details please refer to the product manual.

©2021 Sonance. All rights reserved. Sonance is a registered trademarks of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website at www.sonance.com.

SONANCE • 991 Calle Amanecer • San Clemente, CA 92673 USA • Phone: (949) 492-7777 • Fax: (949) 361-5151 • Technical Support: (949) 492-7777 • www.sonance.com 08.13.2021