

8MP HD IR Fixed Eyeball Network Camera

IP8T-NC



Key Features

















- High quality image with 8MP, 1/2.7"CMOS sensor
- 8MP (3840*2160)@ 20fps; 5MP (3072*1728)@ 30/25fps; 4MP (2560*1440) @30/25fps; 2MP (1920*1080) @30/25fps
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Built-in Mic
- Smart IR, up to 30m (98ft) IR distance
- Supports 265 G Micro SD card
- IP67 protection




Specifications

| | IP8T-NC | | | | | | | | |
|-------------------------|--|------------|----------|--------------------------------|-----|---------------|--|--------------|--|
| Camera | | | | | | | | | |
| Sensor | 1/2.7", 8.0 megapixel, progressive scan, CMOS | | | | | | | | |
| Lens | 2.8mm@F2.0 | | | | | | | | |
| | Lens (mm) | Detect (m) | | Observe (m) | | Recognize (m) | | Identify (m) | |
| DORI Distance | 2.8 | 84.0 | | 33.6 | 16. | 16.8 | | 8.4 | |
| | 4.0 | 120.0 | | 48.0 | 24. | 24.0 | | 12.0 | |
| Angle of View (H) | 112.4° | | | | | | | | |
| Angle of View (V) | 60.1° | | | | | | | | |
| Angle of View (O) | 146.1° | | | | | | | | |
| Adjustment angle | Pan: 3° ~ 360° | | Tilt: 0° | lt: 0° ~ 80° Rotate: 3° ~ 360° | | | | | |
| Shutter | Auto/Manual, 1 ~ 1/100000s | | | | | | | | |
| Minimum Illumination | Colour: 0.01Lux (F2.0, AGC ON) OLux with IR on | | | | | | | | |
| Digital Noise Reduction | 2D/3D DNR | | | | | | | | |
| Day/Night | IR-cut filter with auto switch (ICR) | | | | | | | | |
| S/N | >56dB | | | | | | | | |
| IR Range | Up to 30m (98 ft) IR range | | | | | | | | |
| Wavelength | 850nm | | | | | | | | |
| IR On/Off Control | Auto/Manual | | | | | | | | |
| Defog | Digital Defog | | | | | | | | |
| WDR | 120dB | | | | | | | | |
| Video | | | | | | | | | |
| Video Compression | Ultra 265, H.265, H.264, MJPEG | | | | | | | | |
| H.264 code profile | Baseline profile, Main profile, High profile | | | | | | | | |
| Frame Rate | Main Stream: 8MP (3840*2160), Max 20fps; 5MP (3072*1728), Max 30fps; 4MP (2560*1440), Max 30fps; 1080P (1920*1080), Max 30fps; Sub Stream: 1080P (1920*1080), Max 30fps;720P (1280*720), Max 30fps; D1 (720*576), Max 30fps; 640*360,Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps; Third Stream: D1 (720*576), Max 30fps; 640*360,Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps; | | | | | | | | |
| Video Bit Rate | 128 Kbps~16 Mbps | | | | | | | | |
| OSD | Up to 8 OSDs | | | | | | | | |
| Privacy Mask | Up to 4 areas | | | | | | | | |
| ROI | Up to 8 areas | | | | | | | | |
| Motion Detection | Up to 4 areas | | | | | | | | |
| Image | | | | | | | | | |
| White Balance | Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2 | | | | | | | | |
| Smart IR | Support | | | | | | | | |
| Flip | Normal/Vertical/Horizontal/180°/90°Clockwise/90°Anti-clockwise | | | | | | | | |
| Dewarping | Supported | | | | | | | | |
| HLC | Supported | | | | | | | | |
| BLC | Supported | | | | | | | | |



| Audio | | | | | |
|------------------------|--|--|--|--|--|
| Audio Compression | G.711 | | | | |
| Suppression | Supported | | | | |
| Sampling Rate | 8KHZ | | | | |
| Storage | | | | | |
| Edge Storage | Micro SD, up to 256GB | | | | |
| Network Storage | ANR | | | | |
| Network | | | | | |
| Protocols | IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS | | | | |
| Compatible Integration | ONVIF (Profile S, Profile G, Profile T), API | | | | |
| Client | EZStation EZView EZLive | | | | |
| | Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below | | | | |
| Web Browser | Plug-in free live view: Chorme 57.0+, Firefox 58.0+, Edge 16+, Safari 11+ | | | | |
| Interface | | | | | |
| Network | 1 RJ45 10M/100M Base-TX Ethernet | | | | |
| Built-in Mic | Supported | | | | |
| Certifications | | | | | |
| Certifications | CE: EN 60950-1 UL: UL60950-1 FCC: FCC Part 15 | | | | |
| General | | | | | |
| | DC 12V±25%, PoE (IEEE 802.3af) | | | | |
| Power | Power consumption: Max 5.0W | | | | |
| Dimensions (L × W × H) | Φ 110.5 x 94.1mm (Φ4.4" x 3.7") | | | | |
| Net Weight | 0.44kg (0.97lb) | | | | |
| Material | Metal | | | | |
| Working Environment | -30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing) | | | | |
| Strorage Environment | -30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing) | | | | |
| Surge Protection | 2KV | | | | |
| Ingress Protection | IP67 | | | | |
| Reset Button | N/A | | | | |

Dimensions

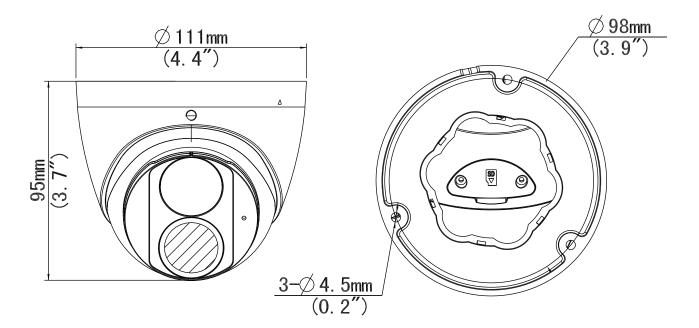

Warranty

All Illumivue products come with a 3-year limited liability warranty. This warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products which have been abused, modified, or disassembled. Warranty items only by authorized resellers. Warranty not eligible for products purchased through non-authorized online sellers.

A product that fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for 90 days from the date of reshipment to the buyer. If the unit is delivered by mail, customers agree to insure the unit or assume the risk of loss or damage in transit. Under no circumstances will a unit be accepted without a return authorization number. The warranty is in lieu of all other warranties expressed or implied, including without limitations, any other implied warranty or fitness or merchantability for any particular purpose, all of which are expressly disclaimed. Proof of sale may be required in order to claim warranty.