

**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

**Bulb Recommended:** (2) Medium Base 60W Maximum (not supplied)

**Estimated Assembly Time:** 10-15 minutes

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.


### ⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.


Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.

### Package Contents

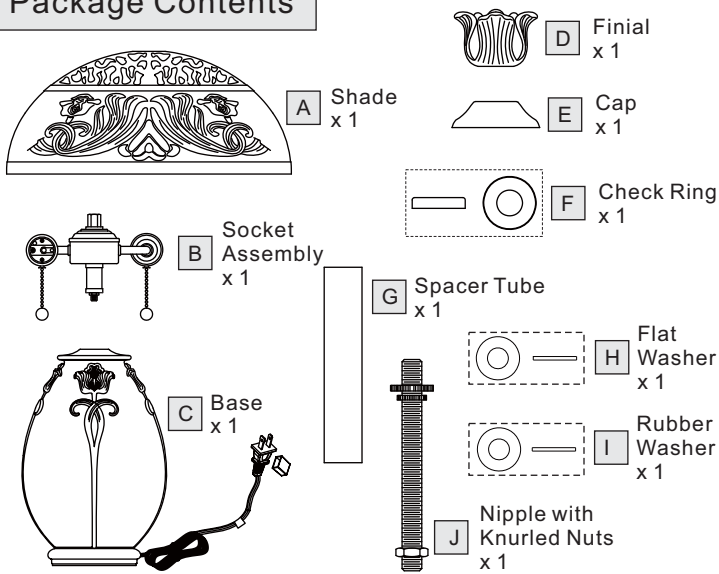


### STEP 2 - Install Spacer Tube

A. Place the Spacer Tube (G) and the Check Ring (F) over the Nipple (J) and secure with the Small Knurled Nut. Hand tighten until snug.

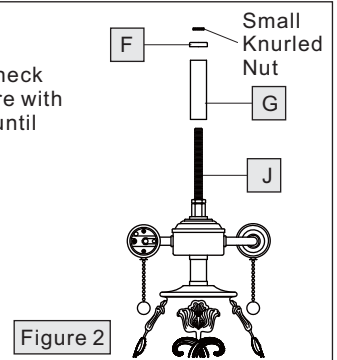


### STEP 3 - Install Shade

A. Thread the Big Knurled Nut onto the Nipple (J) and adjust to proper location for rest components.  
B. Place the Flat Washer (H), the Rubber Washer (I), the Shade (A) and the Cap (E) over the Nipple (J) in turn. Secure by threading the Finial (D) onto the Nipple (J). Hand tighten until snug.

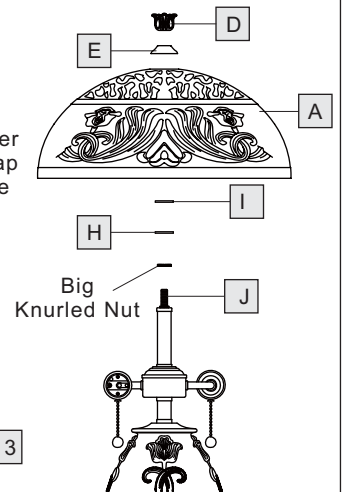

### STEP 1 - Install Stem with Knurled Nuts

A. Thread the Socket Assembly (B) onto the Base (C) and hand tighten until snug.  
B. Remove the Knurled Nuts from the Nipple (J).  
C. Thread the hex nut end of the Nipple (J) into the Hex Coupling on the top of the Socket Assembly (B). By using pliers, thread the hex nut against the Hex Coupling. Hand tighten until snug.

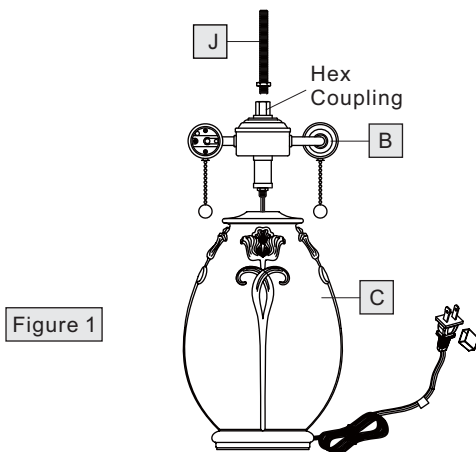

### STEP 4 - Install Bulbs

A. This fixture uses standard bulb with medium base. Maximum 60 watts.  
B. Insert bulb and screw snugly into place.

Your fixture is now assembled and ready to use. Enjoy!

