

Specifications

Features

- 1.8 GPM Flow Rate
- 4-Hole Installation
- Stainless Steel Ball Valve
- Side Spray Included
- 1.5 GPM Flow Rate with Insert 941-372, Order Separately
- Limited Lifetime Warranty

- Single Control
- 4-Hole Installation
- Stainless Steel Ball Valve


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handle Only)



Dimensions

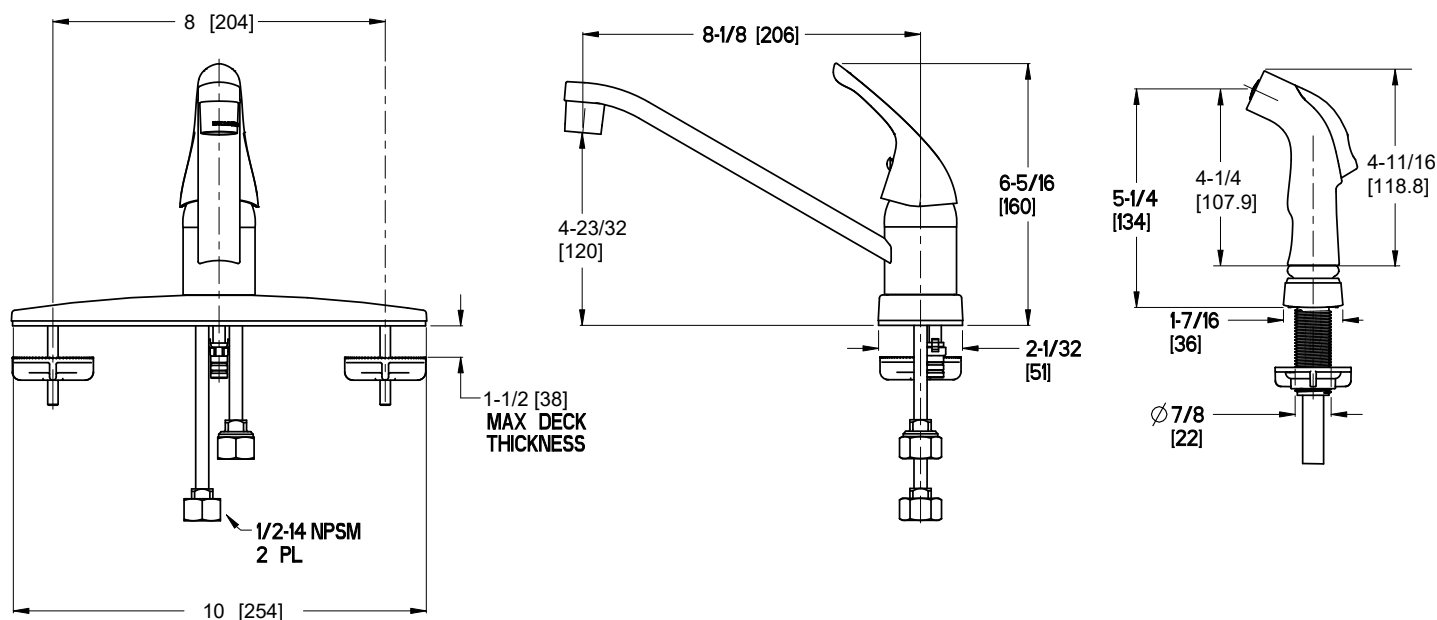

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings