


HOW BEAUTIFUL KITCHENS BREATHE



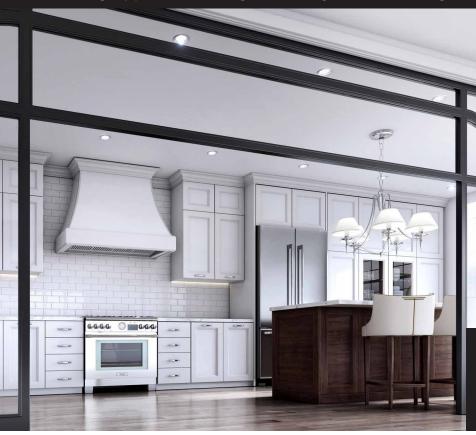

XOIL4819SC


- 3 Speeds with Power Boost
- Code Compliance Control 395/600 CFM
- Dimmable 3000K LED lights (x2)
- 5 Minute delay function


POWERFUL COMBINATION INSERT BLOWER + LINER


The XOIL series are designed as all-in-one blower / liner combination units for easy installation into custom hoods. Each XOIL model is designed and crafted in Italy to incorporate a multi-speed blower, controls, filtration, LED Lamps and back flow damper. The XOIL is everything you need in one easy to install package.

At XO, we believe that a good design is something everyone can afford



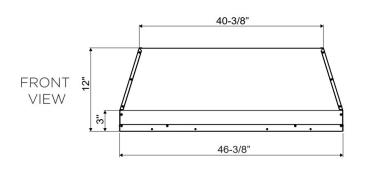







FEATURES

FINISH

Stainless Steel

- Electronic 3 Speed Control
- CCC Code Compliance Control 395 or 600 CFM
- High Efficiency Dimmable 3000k LED lights (x4)
- High Velocity Blower optimally removes Smoke, Grease and Odors
- Optional ADA Compliant Wireless Remote Control
- Dishwasher Safe Stainless Steel PRO Baffle Filters
- 6" Vertical Duct
- 5 Minute Delay Shutoff Timer
- Made In Italy

PERFORMANCE

SPEED	1	2	3	BOOST
CFM	150	250	395	600
SONES	1.0	2.4	4.0	6.4

SPECIFICATIONS

ELECTRICAL 115V 60H7 4 AMP

DIMENSIONS

H 12"

W 46-3/8"

D 19-1/4"

CUTOUT DIMENSIONS

XOIL4819KSE 46-1/2" x 19-7/16"

MOUNTING HEIGHT

ABOVE COOKING 27" - 32"

OPTIONS

Wireless ADA Compliant

Remote Control

XOVREMOTE1

Optional 6" Automatic Make-Up Air Kit

XOMA06





xoappliance.com | 800.966.8300

RECOMMENDED MOUNTING HEIGHT

All range hoods have a recommended range of installation height over the cooking surface. However cooking styles, types of cooking equipment and installation limitation can vary greatly. For installations outside the recommended range - consult XO.

THIS MODEL HAS A 6" DIAMETER EXHAUST DUCT

MAKE-UP AIR

Many states have adopted regulations regarding the re-introduction of make-up air for homes with ventilation systems which can exhaust more than a specified volume of air, typically 400 CFM.

Your cooking equipment and use determine how much ventilation you need. If your local building codes require a make-up air solution based on that need, XO has the answer.

RECOMMENDED MOUNTING HEIGHT ABOVE COOKTOPS 27" to 32"

XOMA MAKE-UP AIR KITS

Make-Up Air Kits consist of two parts.

1. A sensor collar which is mounted in the exhaust duct of the hood.

This contains a feather switch that is activated when air flow is detected in the duct.



2. A motorized air inlet damper which is usually mounted to the home's HVAC system.

When it receives a signal from the sensor collar, the damper automatically opens to admit fresh air which is distributed via the HVAC system.

When the blower shuts off, the feather switch returns to the off position and the motorized damper is deactivated. The air inlet damper is automatically closed by a return spring.

