


Location:



SYMMONS®

Symmetrix®



S20
Standard handle

Lavatory Faucet S20 Specification Submittal

Feature Highlights



- Single lever faucet with red & blue indicators on handle
- Ceramic control components and handle limits stop
- Supply has 3/8 inch copper tubing
- 4 inch (102mm) centers
- Metal construction
- Polished chrome finish (standard)
- Standard 1.0 gpm (3.8 L/min) flow rate

Standards / Certifications

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372
WaterSense: 1.0 gpm (3.8 L/min)



S20 series handle options

Standard	LP	W	
 	 	 	

Model Numbers

Append appropriate suffix to model number.

- ☐ S20 Faucet only with lift rod hole
- ☐ S200 Faucet only without lift rod hole
- ☐ S201 Faucet with lift rod
- ☐ S202 Faucet with pop-up drain & lift rod
- ☐ S202G Faucet with grid strainer drain assembly

Handle Options / Modifications

Append appropriate suffix to model number.

- ☐ LP Loop handle with metal finish
- ☐ W 6 inch (152 mm) lever handle with metal finish, handle with red & blue indicators on handle (polished chrome finish only)

Finish Options / Modifications

Append appropriate suffix to model number.

- ☐ STN Satin nickel*
- Polished chrome (standard)

***Note** Handles with red/blue indicators are not available with decorative finishes.

Other Options / Modifications


Append appropriate suffix to model number.

- ☐ LST 16 inch copper supply tubing
- ☐ BH 20 inch braided supply hose
- ☐ OFG Offset grid strainer (model S202G only)
- ☐ **C6** 035 Aerator flow restrictor, 0.35 gpm (1.3 L/min)
- ☐ **C6** 05 Non-aerated laminar spray, 0.5 gpm (1.9 L/min)
- ☐ VP Vandal resistant aerator (not available for 0.5)

Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.


10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.




Architectural/ Engineering Specification

Symmons Symmetrix Lavatory Faucet _____ with single lever faucet with red & blue indicators on handle, ceramic control components and handle limits stop, supply has 3/8 inch copper tubing, 4 inch (102mm) centers, Metal construction, Polished chrome finish (standard), Standard 1.0 gpm (3.8 L/min) flow rate. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372, WaterSense: 1.0 gpm (3.8 L/min) complaint. Available options include: "LST - 16 inch copper supply tubing", "BH - 20 inch braided supply hose", "OFG - Offset grid strainer (model S202G only)", "O35 - Aerator flow restrictor, 0.35 gpm (1.3 L/min)", "O5 - Non-aerated laminar spray, 0.5 gpm (1.9 L/min)", "VP - Vandal resistant aerator (not available for 0.5)", "STN - Satin nickel".


Dimensions Symmetrix Lavatory Faucet, S202

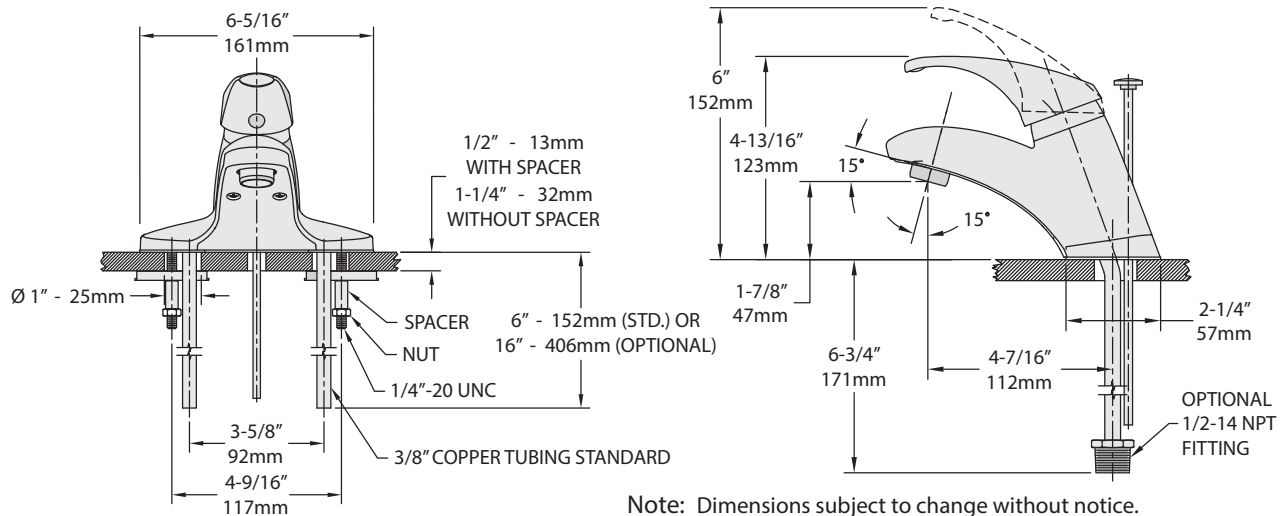

Dimensions Symmetrix Lavatory Faucet, S202BH (with braided supply hose)

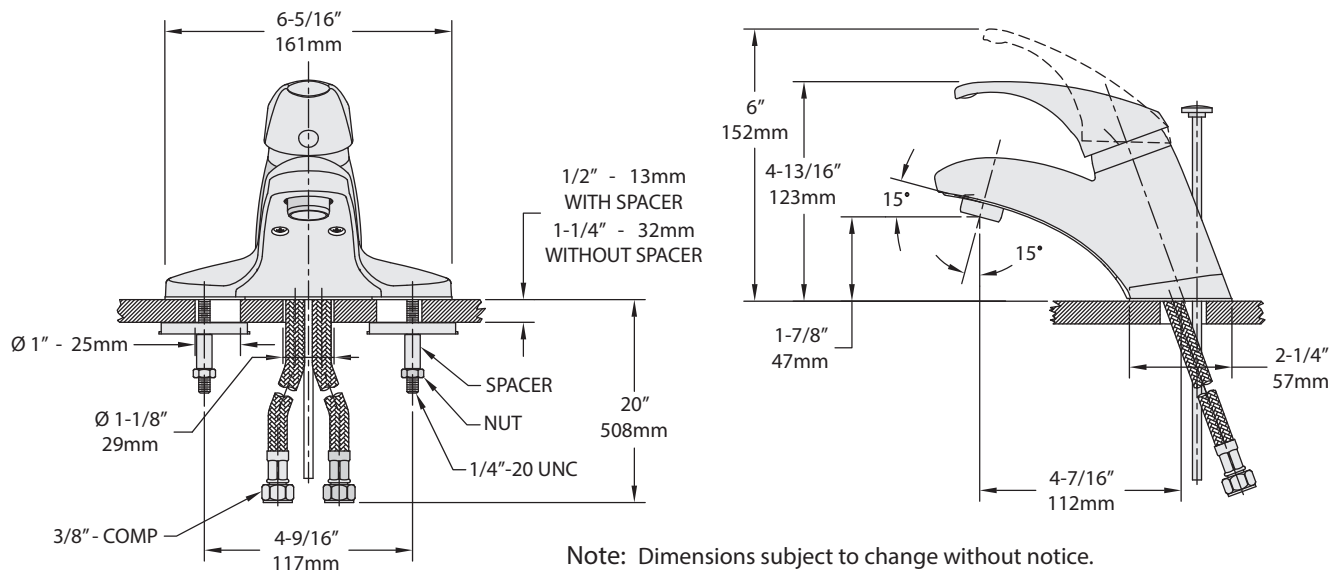

Dimensions Symmetrix Lavatory Faucet, S202W
(S20 Series with optional lever handle, option W)

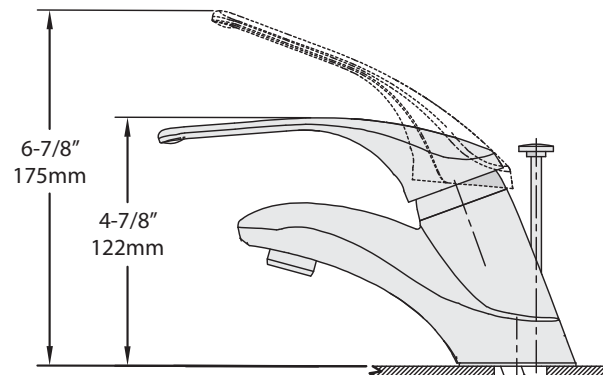

Emplacement:




SYMMONS® Symmetrix®

Robinets de lavabo

S20 Series

Présentation des spécifications

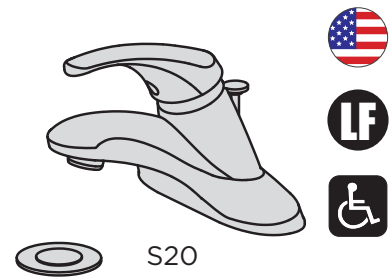

Principales caractéristiques

- Robinet à levier unique livré avec pastilles rouge et bleue sur la poignée
- Composants des commandes et limite d'arrêt de la poignée en céramique
- Alimenté par un tuyau de cuivre de 3/8 pouces
- Centres de 4 pouces (102 mm)
- Construction métallique
- Finition chromée polie (standard)
- Débit standard de 1,0 gpm (3,8 l / min)

Normes/certifications

ASME A112.18.1/CSA B125.1



NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372

WaterSense: 1.0 gpm (3.8 L/min)

Poignée standard



Options de poignées de la série S20

Standard	LP	W	
			

Numéros de modèles

Joindre le suffixe approprié au numéro de modèle.

- | | |
|--------------------------------|--|
| ☐ S20 | Robinet seulement avec trou de tige de levage |
| ☐ S200 | Robinet seulement sans trou de tige de levage |
| ☐ S201 | Robinet avec tige de levage |
| ☐ S202 | Robinet avec bonde mécanique et tige de levage |
| ☐ S202G | Robinet avec assemblage de grille d'égouttage |

Options/modifications de la poignée

Joindre le suffixe approprié au numéro de modèle.

- | | |
|-----------------------------|--|
| ☐ LP | Poignée en boucle avec finition métallique |
| ☐ W | Poignée en levier de 6 pouces (152 mm) avec finition métallique, poignée avec indicateurs rouges et bleus sur la poignée (finition chromée polie seulement). |

Options/modifications du fini

Joindre le suffixe approprié au numéro de modèle.

- ☐ STN Nickel satiné*

*Remarque les poignées avec pastilles rouges et bleues ne sont pas disponibles avec des finitions décoratives.

Autres options/modifications

Joindre le suffixe approprié au numéro de modèle.

- | | | |
|--------------------------|---|--|
| ☐ | LST | Tuyau d'alimentation en cuivre de 16 pouces |
| ☐ | BH | Boyau d'alimentation fileté de 20 pouces |
| ☐ | OFG | Filtre de la grille de décalage (modèle S202G seulement) |
| ☐ |  035 | Aérateur avec réducteur de débit de (1,3 L/min) |
| ☐ |  05 | Pulvérisateur laminaire sans aération (1,9 L/min) |
| ☐ | VP | Aérateur résistant au vandalisme (non disponible pour 0.5) |

Dimensions Robinet de lavabo Symmetrix, S202 W
(Série S20 avec poignée de levier en option, option W)

