

4-Ch & 8-Ch Advanced Analytics NVR

NVR4 & NVR8



- Supports Ultra 265/H.265/H.264 video formats
- 4/8-channel inputs
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Supports 1-ch HDMI output, 1-ch VGA output
- Up to 4K resolution recording
- 1 SATA HDD up to 6TB
- Supports cloud upgrades


Specifications


| | NVR4 | NVR8 | |
|----------------------|--|------|--|
| Video/Audio Input | | | |
| IP Video Input | 4-ch | 8-ch | |
| Two-way Audio Input | 1-ch, RCA | | |
| Network | | | |
| Incoming Bandwidth | 64Mbps | | |
| Outgoing Bandwidth | 64Mbps | | |
| Remote Users | 128 | | |
| Protocols | P2P, UPnP, NTP, DHCP, PPPoE | | |
| Video/Audio Output | | | |
| HDMI/VGA Output | HDMI: 3840x2160/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz | | |
| Recording Resolution | 4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | | |

DATASHEET

| | T | | |
|----------------------|--|-----------|--|
| Synchronous Playback | 4-ch | 8-ch | |
| Corridor Mode Screen | 3/4 | 3/4/5/7/9 | |
| Decoding | | | |
| Decoding format | Ultra 265/H.265/H.264 | | |
| Liveview/Playback | 4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF | | |
| Capability | 2 x 4K@30, 3 x 5MP@30, 4 x 4MP@30, 5 x 3MP@30,8 x 1080p@30, 16 x 720p@30 | | |
| Hard Disk | | | |
| SATA | 1 SATA interface | | |
| Capacity | up to 6TB for each disk | | |
| External Interface | | | |
| Network Interface | 1 RJ45 10M/100M self-adaptive Ethernet Interface | | |
| USB Interface | Rear panel: 1 x USB2.0,1 x USB3.0 | | |
| General | | | |
| Power Supply | 12V DC | | |
| | Power Consumption: ≤8 W (without HDD) | | |
| Working Environment | -10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing) | | |
| Dimensions (W×D×H) | 260mm × 240mm × 47mm (10.2"×9.4"×1.9 ") | | |
| Weight (without HDD) | 1.3kg (2.87 lb) | | |


Dimensions

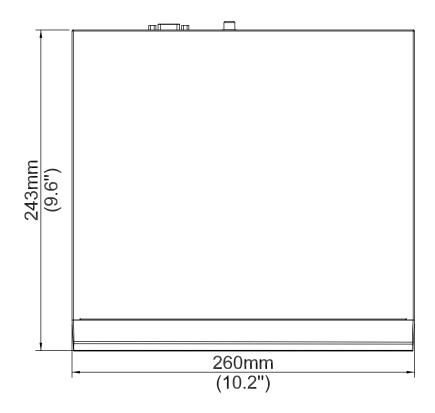





Rear Panel

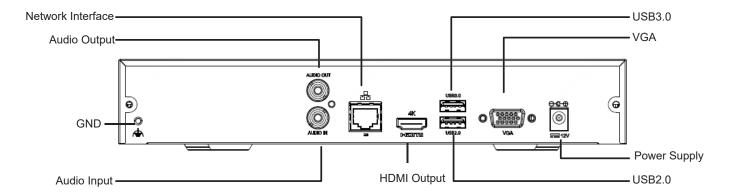

Warranty

All Illumivue products come with a 3-year limited liability warranty. This warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products which have been abused, modified, or disassembled. Warranty items only by authorized resellers. Warranty not eligible for products purchased through non-authorized online sellers.

A product that fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for 90 days from the date of reshipment to the buyer. If the unit is delivered by mail, customers agree to insure the unit or assume the risk of loss or damage in transit. Under no circumstances will a unit be accepted without a return authorization number. The warranty is in lieu of all other warranties expressed or implied, including without limitations, any other implied warranty or fitness or merchantability for any particular purpose, all of which are expressly disclaimed. Proof of sale may be required in order to claim warranty.