

# Incandescent lamps. The enduring solution.




Incandescent lamps represent the original lighting technology, remaining virtually unchanged since their invention in the mid-19th century, and the lighting technology Satco was founded upon.

This is the technology most everyone has become familiar with and the baseline comparison for all other lighting technologies. As the incandescent bulb becomes more and more regulated, Satco remains on the cutting edge of new lighting technologies. Still, we remain well-stocked with incandescent lamps in a multitude of wattages, base sizes, and shapes for every application.

#### Incandescent lamp features:

- High lumen output
- Up to 5,000 hour life
- Virtually every size and style imaginable
- Wattages from 3 to 500 Watts
- Durable vibration and rough service products
- Colored and special application types

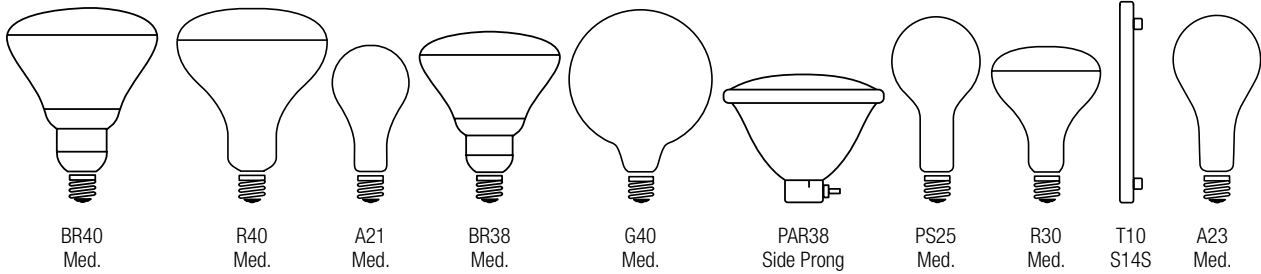

Watts	Bulb Type	Base	Satco Prod. #	Lamp Code	Volts	Finish	M.O.L. Inches	Filament	Initial Lumens	Avg. Rated Hours	Pkg. Type	Master/Inner Carton	Notes
<b>120</b>	BR40	Med. Skt.	<b>S7011</b>	120BR40/TF	130	Frost	6 1/2	C-9	1150	5000	Box	24	
	PAR38	Side Prong	<b>S4802</b>	120PAR/3FL/MINE	120	Clear	4 5/16	CC-6	1740	2000	Box	12	
			<b>S4803</b>	120PAR/3SP/MINE	120	Clear	4 5/16	CC-6	1740	2000	Box	12	
<b>125</b>	R40	Med.	<b>S4750</b>	125R40/1	120	Clear Heat	6 1/2	C-11	-	6000	Box	12	
			<b>S4756†</b>	125R40/1/CL/2PK	120	Clear Heat	6 1/2	C-11	-	6000	Box	12	
<b>135</b>	A21	Med.	<b>S2999 ▲</b>	135A21/TS/8M/SS	120	Clear	4 7/16	C-11V	1750	8000	Sleeve	24	2
<b>150</b>	A21	Med.	<b>S3946</b>	150A21/CL/120V	120	Clear	5 1/16	CC-6	2670	750	Box	24	
			<b>S3945</b>	150A21/FR/120V	120	Frost	5 1/16	CC-6	2670	750	Box	24	
<b>Shatter Proof</b>			<b>S4883</b>	150A21/TF	130	Frost	5 1/16	C-9	1750	2500	Box	24	4
	BR38	Med.	<b>S5001</b>	150BR38/FL/230V	230	Clear	5 5/16	CC-9	1550	2000	Box	12	
	G40	Med.	<b>S3014</b>	150G40	120	Clear	6 3/4	C-9	1700	4000	Box	24/6	
<b>S3004</b>			150G40/W	120	Gloss White	6 3/4	C-9	1550	4000	Box	24/6		
<b>Shatter Proof</b>	PS25	Med.	<b>S3017</b>	150PS25/TF	130	Frost	6 15/16	C-9	2200	5000	Box	24	4
	R30	Med.	<b>S2852</b>	150R30/GRO	120	Plant	5 15/16	C-9	-	2000	Box	96/12	
<b>175</b>	BR38	Med.	<b>S4751</b>	175BR38/HR	120	Red Heat	5 15/16	C-9	-	5000	Box	12	
			<b>S4752</b>	175BR38/HC	120	Clear	5 5/16	C-9	-	5000	Box	12	
<b>200</b>	A23	Med.	<b>S3958</b>	200A23/CL/120V	120	Clear	6 1/16	CC-6	2900	2500	Box	24	
			<b>S3957</b>	200A23/FR/120V	120	Frost	6 1/16	CC-6	2780	2500	Box	24	
<b>250</b>	R40	Med.	<b>S4999</b>	250R40/1	120	Clear Heat	6 1/2	C-9	-	6000	Sleeve	12	
			<b>S4755†</b>	250R40/1/CL/2PK	120	Clear Heat	6 1/2	C-9	-	6000	Box	12	
			<b>S4885</b>	250R40/1/TF	120	Clear Heat	6 7/8	C-9	-	6000	Sleeve	12	4
<b>Shatter Proof</b>	BR40	Med.	<b>S4757†</b>	250BR40/1/CL/3PK	120	Clear Heat	6 1/2	CC-9	-	6000	Box	24/3	
			<b>S4758†</b>	250BR40/1/CL/TF/3PK	120	Clear Heat	6 1/2	CC-9	-	6000	Box	24/3	
<b>Shatter Proof</b>			<b>S4998</b>	250R40/HR	120	Red Heat	6 1/2	C-9	-	6000	Sleeve	12	
			<b>S4754†</b>	250R40/HR/2PK	120	Red Heat	6 1/2	C-9	-	6000	Box	12	
			<b>S4884</b>	250R40/HR/TF	120	Red Heat	6 7/8	C-9	-	6000	Sleeve	12	4
<b>300</b>	BR40	Med.	<b>S7004</b>	300BR40FL/POOL	12	Frost	6 1/2	CC-9/1	2960	2000	Box	24/12	
			<b>S4353 ▲</b>	300BR/FL	120	Flood	6 1/2	CC-2V	3030	2000	Sleeve	24	
			<b>S7003</b>	300BR40FL/POOL	130	Frost	6 1/2	CC-9/1	2485	2000	Box	24/12	
	PS25	Med.	<b>S4959</b>	300M/CL	130	Clear	6 15/16	C-9	3600	5000	Box	24	
			<b>S4960</b>	300M/IF	130	Frost	6 15/16	C-9	3600	5000	Box	24	
	PS35	Mog.	<b>S4961</b>	300PS35/CL	130	Clear	9 3/8	C-9	3600	2500	Box	12	
			<b>S4962</b>	300/PS35/IF	130	Frost	9 3/8	C-9	3600	2500	Box	12	
<b>S7982</b>	300PS35/SB/IF	130	Silver Bowl Inside Frost	9 3/8	C-9	-	1000	Box	24				

NOTE: When using a 130 Volt lamp on a 120 Volt line, life is extended approximately 2.5 times and lumens are reduced approximately 20%.