

Design that shapes living.



CERAMIC TILES INTERNATIONAL

CERAMIC TILE





SMOOTH CONCRETE AND WEATHERED STONE



COLORS








Dover CTI AUDO




Cashel CTI AUCA

SIZES & SHAPES

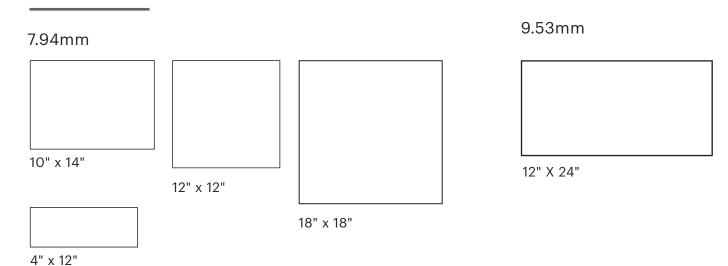

MOSAIC & TRIM



2" x 2" x 6.35mm Mosaic





3" x 12" Bullnose



3" x 3" Bullnose Corner



15/16" x 15/16" Quarter Round Corner



3/4" x 6" Quarter Round





FIELD TILE

7.94 mm



10" x 14"

4" x 12"



12" x 12"



18" x 18"

9.53mm



12" X 24"

6.35 mm



2" x 2" Mosaic





3" x 10" Bullnose



3" x 12" Bullnose



3" x 3" Bullnose Corner



15/16" x 15/16" Quarter **Round Corner**



3/4" x 6" Quarter Round



FIELD TILE

7.94 mm



10" x 14"

4" x 12"



12" x 12"



18" x 18"

9.53mm



12" X 24"

6.35 mm



2" x 2" Mosaic

TRIM



3" x 10" Bullnose



3" x 12" Bullnose




3" x 3" Bullnose Corner



15/16" x 15/16" Quarter **Round Corner**



3/4" x 6" Quarter Round



3/4" x 6" Quarter Round



FIELD TILE

7.94 mm



10" x 14"

4" x 12"



12" x 12"



18" x 18"

9.53mm



12" X 24"

6.35 mm



2" x 2" Mosaic

0.00 11111





3" x 10" Bullnose




3" x 12" Bullnose



3" x 3" Bullnose Corner



15/16" x 15/16" Quarter Round Corner



3/4" x 6" Quarter Round

TECHNICAL INFORMATION



Clearly distinguishable differences in texture and/or pattern within similar colors.



Ready Ship



Recommend offset pattern ≤33%

1/3 offset is now the prevailing recommendation from the Tile Council of North America 2011 for ALL tile 18" or longer.



Stock



Water Absorption: <3% - <20%

Water absorption <3% - <20%



Contains Recycled Content

Post-consumer, Pre-consumer recycled materials



DCOF \geq 0.42 floor tile. Wall tile not applicable .





TECHNICAL INFORMATION

PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR RESULT	MOSAIC RESULT
Water Absorption	C373	< 7.0%	< 3.0%
Breaking Strength	C648	> 250 lbs.	> 250 lbs.
Scratch Hardness	MOHS	7.0	7.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: americanolean.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	4	All Residential / Commercial

USAGE

	FLOOR	WALL	COUNTERTOP	EXTERIOR FLOOR	SHOWER FLOOR
RECOMMENDED	•	•	•		•
NOT RECOMMENDED				•	

CARE AND MAINTENANCE

CERAMIC CARE & MAINTENANCE

Glazed tile products should be cleaned routinely with an all-purpose, low VOC, household or commercial cleaner. The product chosen should also be grout joint cleaning compatible. The type of product may vary depending on the tile application and use. A multipurpose spray cleaner, which removes soap scum, hard water deposits and mildew designed for everyday use can be used on wall tile areas in residential baths and showers. A cotton mop, cloth, sponge, or non-metallic brush should be used to apply and agitate cleaner. Rinse the area with clean water and dry thoroughly. Routine cleaners should never contain harsh chemicals as these can damage tile. Acids can damage grout and the glazed surface of the tile. Ammonia can discolor grout.

Regular dust mopping, sweeping, or vacuuming is recommended prior to cleaning with liquid products.

Unglazed tile should be cleaned routinely with concentrated tile cleaners with a neutral pH for safe regular use. These cleaners are better suited for removing grease, oils, and normal spills from unglazed products. Again, these products will vary depending on the application, amount of traffic and the use. The product chosen should also be compatible with the grout.

ILLINOIS

DOWNTOWN CHICAGO 345 N. Wells Suite 200 Chicago, IL 60654

ELK GROVE VILLAGE 1601 Estes Ave. Elk Grove Village, IL 60007

IOWA

CLIVE 2001 NW 92nd Ct. Clive, IA 50325

KANSAS

KANSAS CITY 5100 Kansas Avenue Kansas City, KS 66106

WICHITA 2140 W. Harry Court Wichita, KS 67213

MICHIGAN

FARMINGTON HILLS 24404 Indoplex Circle Farmington Hills, MI 48335

GRAND RAPIDS 3440 Broadmoor S.E. Grand Rapids, MI 49512

TROY 900 W. Maple Rd. Suite 100 Troy, MI 48084

LIVONIA CORPORATE HEADQUARTERS 28320 Plymouth Road Livonia, Michigan 48150

MINNESOTA

PLYMOUTH 1820 Berkshire Ln. North Plymouth, MN 55441

MISSOURI

SPRINGFIELD 2727 N. Lecompte Rd. Springfield, MO 65803

ST. LOUIS 9215 Dielman Industrial Dr. St. Louis, MO 63132

NEBRASKA

OMAHA 10501 | Street Omaha, NE 68127

OHIO

BROOKLYN HEIGHTS 4749 Spring Rd. Brooklyn Heights, OH 44131

WARRENSVILLE HEIGHTS 4670 Richmond Rd. Warrensville Heights, OH 44128

OKLAHOMA

OKLAHOMA CITY 5600 SW 36th St. Suite C Oklahoma City, OK 73179

TULSA 11915 East 51st St. Tulsa, OK 74146

WISCONSIN

MENOMONEE FALLS W135 N5511 Campbell Dr. Menomonee Falls, WI 53051



Good design is born of creativity and imagination, but as we build and renovate, update and expand, the materials we select will define the quality of the spaces we live in beyond what meets the eye.

