

SCP PART#: CAT5E-25PR

Rev03/20

Description:


CAT5E 25 PAIR- 350 MHz 24 AWG SOLID
 U/UTP, PVC JKT- BLUE- 1000 FT SPOOL

Regulatory:

UL 444, ANSI/TIA 568.2-D and ISO/IEC 11801
 Type (UL) CMR or c(UL) FT4
 EU RoHS 2011/65 EU Compliant

Application:

Lan Cable

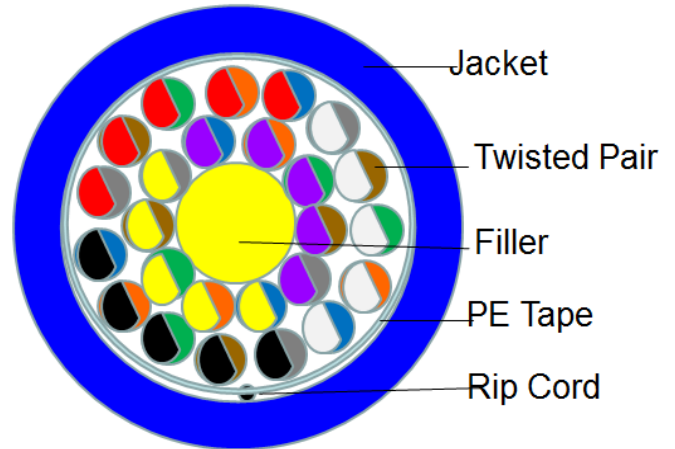

Construction Characteristics:

Conductor	Material	Solid Bare Copper	
	Size	24AWG X 25P	
	Construction	1/0.51+/-0.004mm	
Insulation	Material	HDPE	
	Min.Thickness	0.185mm	
	AVG.Thickness	0.205mm	
	Diameter	0.92+/-0.05mm	
	Colors		White/Blue
			White/Orange
			White/Green
			White/Brown
			White/Gray
			Red/Blue
			Red/Orange
			Red/Green
			Red/Brown
			Red/Gray
			Black/Blue
			Black/Orange
			Black/Green
			Black/Brown
			Black/Gray
			Yellow/Blue
			Yellow/Orange
			Yellow/Green
			Yellow/Brown
			Yellow/Gray
			Violet/Blue
			Violet/Orange
			Violet/Green
			Violet/Brown
		Violet/Gray	
Filler		Material	PVC
Screen		Material	PE Tape
Sheath		Material	PVC
	AVG. Thickness	1.1mm	
	Min. Thickness	0.95mm	
	Diameter	12.0+/-0.40mm	
	Rip Cord	Nylon	
	Color	Blue	

Electrical & Physical Characteristics:

Operating Temperature Range		- 20°C + 70°C	
Conductor Resistance		Max 93.8 ohm/km at 20°C	
Dielectric Strength		Min AC1.5KV	
Minimum Flexing Bend Radius		>20x the jacket diameter	
Insulation	Unaged	Tensile Strength	16.5Mpa
		Elongation	500%
	Aged	Tensile Strength	14.2Mpa(100°C 168h)
		Elongation	250%(100°C 168h)
Jacket	Unaged	Tensile Strength	13.8Mpa
		Elongation	100%
	Aged	Tensile Strength	11.7Mpa(100°C 168h)
		Elongation	50%(100°C 168h)
DC Resistance Unbalance		Max 5%	
Pair-to-Ground Capacitance Unbalance		Max 3300pF/km	
Characteristic Impedance		100+/-15OHM	
Nominal Velocity of Propagation(%)		67~69	
Propagation Delay		Max 536ns/100m	
Delay Skew		Max 45ns/100m	

Marking:

STRUCTURED CABLE PRODUCTS --- CAT5E 25PR --- CAT5E ENHANCED 350 MHz 25PR 24AWG UTP VERIFIED TO ANSI/TIA-568.2-D CMR FT4 75C (UL) OR C(UL) E198134 CE EU RoHS EC ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M

Packaging:

Approx.Weight(kg)	Approx.Dimension(mm)	Package	Packages per pallet
61.4	550X320X250	1000ft/SPOOL	8/12

Performance

ITEM Frequency	Attenuation Max (dB)	NEXT Min (dB)	PS NEXT Min (dB)	ACR Min (dB)	RL Min (dB)	ELFEXT Min (dB)	PS ELFEXT Min (dB)	PSACR Min (dB)
1	2	65.3	62.3	63.3	20	63.8	60.8	60.3
4	4.1	56.3	53.3	52.2	23	51.8	48.8	49.2
8	5.8	51.8	48.8	46	24.5	45.7	42.7	43
10	6.5	50.3	47.3	43.8	25	43.8	40.8	40.8
16	8.2	47.2	44.2	39	25	39.7	36.7	36
20	9.3	45.8	42.8	36.5	25	37.8	34.8	33.5
25	10.4	44.3	41.3	33.9	24.3	35.8	32.8	30.9
31.25	11.7	42.9	39.9	31.2	23.6	33.9	30.9	28.2
62.5	17	38.4	35.4	21.4	21.5	27.8	24.8	18.4
100	22	35.3	32.3	23.3	20.1	23.8	20.8	10.3
155	28.1	32.4	29.4	4.3	18.8	20	17	1.3
200	32.4	30.8	27.8	---	18	1.7	14.7	---
300	41	28.1	25.1	---	16.8	14.2	11.2	---
350	44.9	27.1	24.1	---	16.3	12.9	9.9	---