

Location: _____



MI-HUB

NO HUB COUPLINGS



Specification: MIFAB® Series MI-HUB (specify size) shielded no hub couplings are manufactured with gaskets made with neoprene that meets the requirements of ASTM C564 housed inside a Type 301 stainless steel corrugated shield. Two (2" through 4" size), four (6" through 10" size) or six (12" sizes) Type 301 stainless steel clamps tightened with 5/16" Type 305 stainless steel hex head screws surround the shield to provide the sealing force. MI-HUB Series Couplings are tested and certified to the ASTM C1277, CISPI 310, CSA B602 (File # 247608) and B70 Standards. They are listed with IAPMO and NSF certified CISPI 310. Also tested and certified by Intertek Testing Services to CAN/ULC S102.2 "Smoke Test."

Function: Used to provide a positive and significant seal between no hub cast iron pipe and fittings.

Material Specifications:


Bands - Type 301 AISI stainless steel (Minimum tensile 165,000 psi).

Eyelets - Type 301 AISI stainless steel.

Gasket - Neoprene - meeting the requirements of ASTM C564. Oil Immersion test: 80% max. Volume change after immersion in IRM 903 for 70 hours at 212° F.


Screw Housing - Type 304 AISI stainless steel.

Screws - Type 305 AISI stainless steel, 5/16" Hex head / Shoulder. **Shield** - Type 301 AISI stainless.



Performance Specifications:

- Requires a 5/16" hex head driver to tighten bolts to 60 inch lbs. min/max torque.
- The MIFAB MI-HUB no hub couplings are also tested and certified to the ASTM C1460 Standard to connect cast iron pipe to PVC / ABS pipe in the 1 1/2", 2" 3", 4", 5", 6" and 8" sizes.

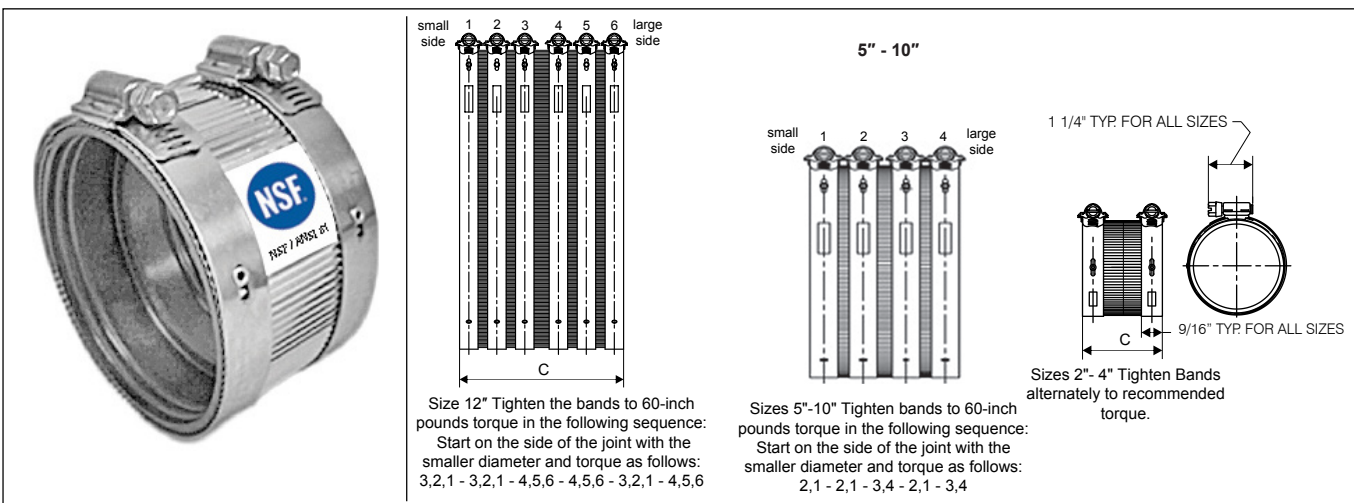

MODEL NUMBER	PIPE SIZE (NOMINAL DIA.)	(C) HEIGHT	INSTALLATION TORQUE (IN. - LBS)	ASTM C1277 HYDROSTATIC PRESSURE REQUIREMENT	NUMBER OF CLAMPS PER COUPLING	BAND WIDTH (CLAMP)
MI-HUB-150	1 1/2"	2 1/8"	60	20 psi	2	9/16"
MI-HUB-2150	2 x 1 1/2"	2 1/8"	60	20 psi	2	9/16"
MI-HUB-2	2"	2 1/8"	60	20 psi	2	9/16"
MI-HUB-3	3"	2 1/8"	60	20 psi	2	9/16"
MI-HUB-32	3" x 2"	2 1/8"	60	20 psi	2	9/16"
MI-HUB-4	4"	2 1/8"	60	20 psi	2	9/16"
MI-HUB-42	4" x 2"	2 1/8"	60	20 psi	2	9/16"
MI-HUB-43	4" x 3"	2 1/8"	60	20 psi	2	9/16"
MI-HUB-5	5"	3"	60	20 psi	4	9/16"
MI-HUB-6	6"	3"	60	10 psi	4	9/16"
MI-HUB-8	8"	4"	60	6 psi	4	9/16"
MI-HUB-10	10"	4"	60	6 psi	4	9/16"
MI-HUB-12	12"	5.43"	60	6 psi	6	9/16"
MI-HUB-15	15"	5.43"	60	6 psi	6	9/16"

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____