

BLACK DIAMOND®

Project Name: _____

Location: _____

Item #: _____

Qty: _____

Black Diamond 24" Gas Range with Oven, 4 Burners, 120,000 BTUs, in Stainless Steel

BDGR-24/NG



Elevate your commercial kitchen with this Black Diamond Gas Range, engineered for reliability and efficiency. Crafted from robust stainless steel and cast iron, it promises long-lasting durability. Featuring four powerful burners, each delivering 30,000 BTUs, and a standard oven with a temperature range of 250° to 550°F, it excels in demanding environments. Manual ignition and control offer precision, while removable grates ensure easy cleaning and maintenance.

FEATURES AND CONSTRUCTION

- Made from high-quality stainless steel and cast iron
- Features a powerful 120,000 BTUs output
- Equipped with 4 burners for versatile cooking
- Designed with a 4 burner capacity for high-volume cooking
- Equipped with casters for stability and mobility
- Comes with a standard coupling adaptor, gas connection, and natural gas type
- Manual ignition and control type for straightforward operation
- Temperature range of 250° to 550°F for versatile cooking
- Removable crumb tray for easy maintenance
- Backriser with shelf provides extra storage for frequently used items, keeping them within easy reach while cooking
- Removable crumb tray catches food debris, grease and crumbs that fall during cooking, making cleaning easier

3RD PARTY APPROVALS



WARRANTY (USA / CANADA)

One (1) Year Limited Warranty on Parts and Labor

Contact us for details at 1.877.368.2797




INCLUDED COMPONENTS

- (4) Casters
- (1) Relief Valve
- (10) Gas Conversion Orifices
- (19) Screws
- (2) Gas Conversion Pilot Orifice
- (1) Rear Backplate Assembly



Black Diamond 24" Gas Range with Oven, 120,000 BTUs, 4 Burners, NG

BDGR-24/NG

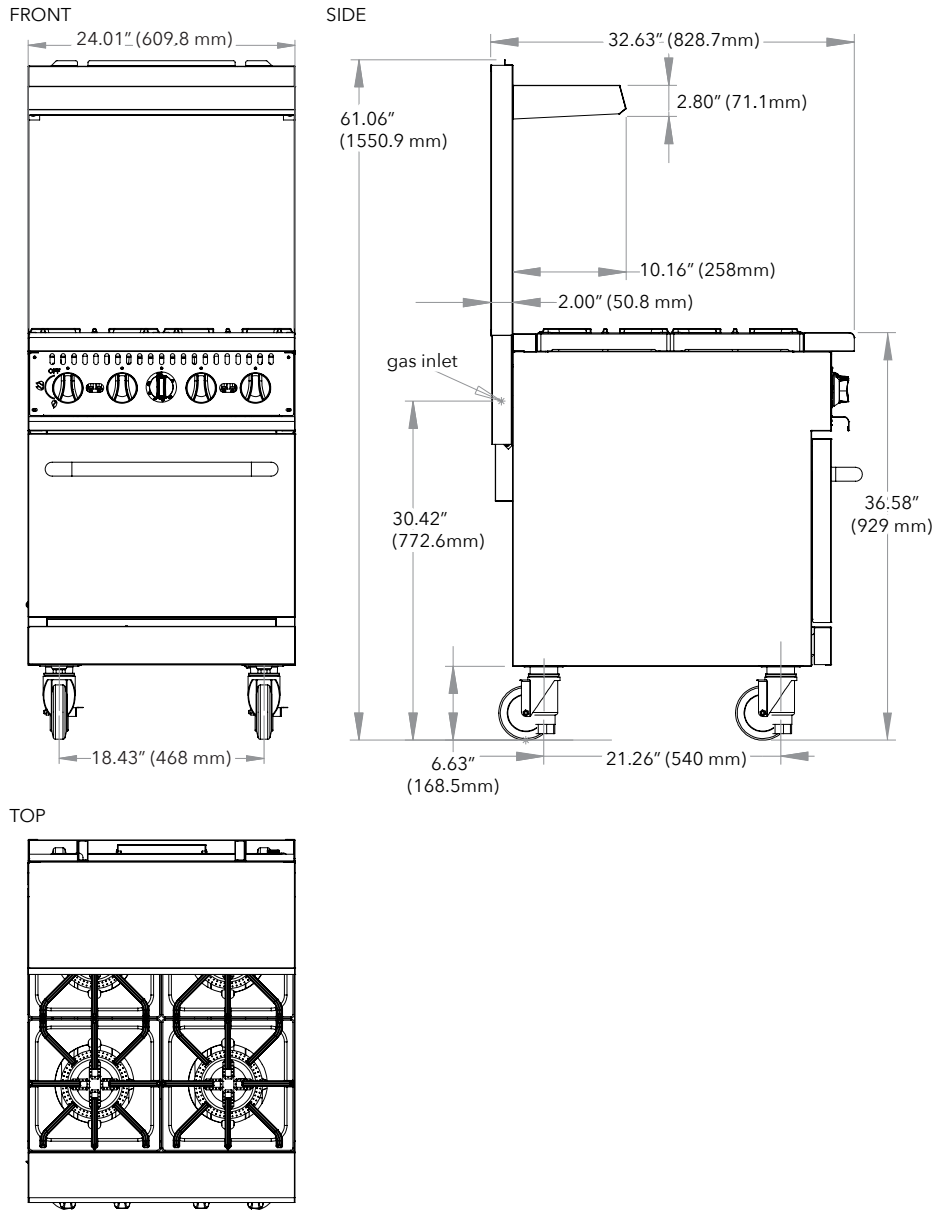

Gas

Total BTU/hr	Number of Burners	Number of Ovens	Crumb Trays	Assembled Dimensions (in)	Item Weight (lbs)	Shipping Weight (lbs)
120000	4	1	1	32.63" x 24.01" x 61.06"	284.4	356.1

ADDITIONAL INFORMATION

- Electricity not needed.
- Liquid Propane (LP) or Natural Gas (NG) units available. Field convertible from LP to NG and vice versa.
- Minimum supply pressure is 4" W.C. for natural gas and 10" W.C. for propane.
- Gas powered appliances must always be indoors, under an approved exhaust system with grease removal filters and a fire protection system.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.