

Catalog Number	
Notes	Type

Wallpack® IV

Description

Wallpack IV is a wall mounted luminaire consisting of a precisely contoured anodized aluminum reflector, thermal shock resistant borosilicate glass retractor, integral HID Holophane ballast and die cast aluminum housing. Luminaire shall have a self hinged door secured by captive fasteners. Ballast and lamp socket shall be completely factory pre-wired and tested. Luminaire shall be designed to mount directly on a wall for surface wiring or over a recessed outlet box. The integral ballast shall provide reliable starting temperatures to -30°C. HID ballast shall be positioned for maximum heat dissipation. Luminaire housings shall be finished with a thermal-setting polyester powder paint coating. Luminaire shall be UUCUL listed for wet locations.

Maximum Ambient Temperatures:




30°C: 250PM
40°C: 10DMH, 15DMH, 30DIN, 42CFL. ALL HPS.

Warranty

2-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions.

Note: Actual performance may differ as a result of end-user environment and application.

DIMENSIONAL DATA

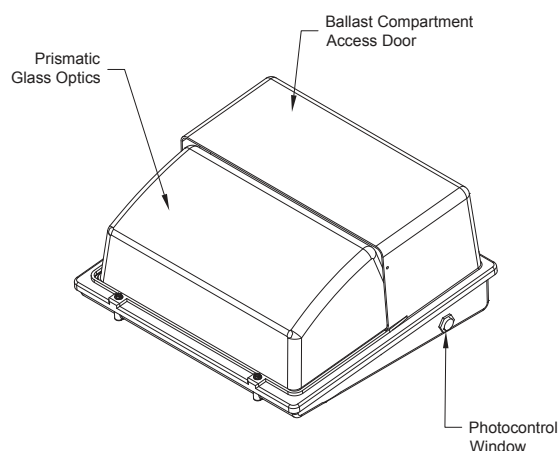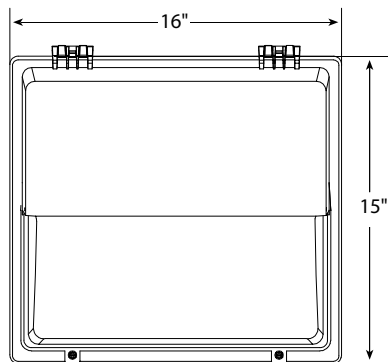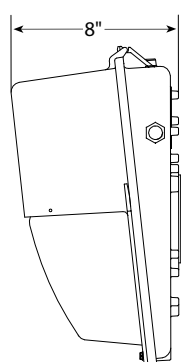

Maximum Weight - 34 Lbs.

ORDERING INFORMATION

Series	Ballast Type	Voltage	Optics	Color	Options
W4	050HP 50W HPS, MOG BASE	12 120 VOLT CULUS	C Cutoff	G Gray	B Photocontrol (120, 208, 240 & 277V only)
	070HP 70W HPS, MOG BASE	20 208 VOLT	S Standard	K Black	C Nema decal
	100HP 100W HPS, MOG BASE	24 240 VOLT		W White	D Polycarbonate shield
	15AHP 150W 55V HPS	27 277 VOLT CULUS		Z Bronze	F1 Single fusing 120, 240, 277, 347, MA, MC & M D volts
	200HP 200W HPS, MOG BASE	48 480 VOLT			F2 Double fusing 208, 240, 480, MB & MC volts
	250HP 250W HPS, MOG BASE	VT 120, 277, 347 VOLT CULUS			G Wire guard
	400HP 400W HPS, MOG BASE	MA MT (PREWIRED TO 120V)			P Protected starter (HPS only, not available with VT in 050, 070, 100 & 150w)
	10DMH 100W MH, MED BASE	MB MT (PREWIRED TO 208V)			T Tamper resistant screws
	15DMH 150W MH, MED BASE	MC MT (PREWIRED TO 240V)			
	250PM 250W PM, MOG BASE	MD MT (PREWIRED TO 277V)			
	30DIN 300W MAX INC.				
	42CFL 42W COMP FLUOR.				

Accessories: Order as separate catalog number.

W4TPD Driver for tamper resistant screws
LAMP Ship appropriate lamp as line item