


Features

- KOHLER cast iron
- Acid-resistant enamel finish
- Single bowl
- With rim guard
- 2-hole (K-6714 and K-6716)
- Drilled back (K-6714 and K-6716) or blank back (K-6718 and K-6719)

SERVICE SINK

K-6714

ALSO K-6716, K-6718, K-6719

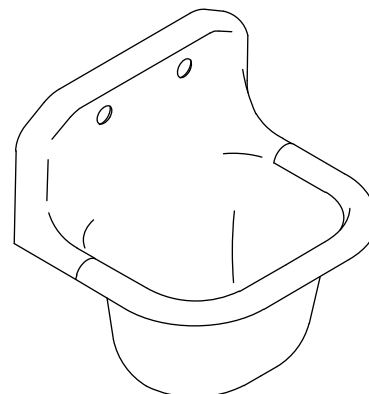

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.1/CSA B45.2

Colors/Finishes

- 0: White

Accessories:

- CP: Polished Chrome
- RP: Rough Plate
- NA: None applicable

Specified Model

Model	Description	Colors/Finishes
K-6714	22-1/4" (565 mm) x 18-1/4" (464 mm) drilled back service sink	☐ 0 White
K-6716	24" (610 mm) x 20-1/4" (514 mm) drilled back service sink	☐ 0 White
K-6718	22-1/4" (565 mm) x 18-1/4" (464 mm) blank back service sink	☐ 0 White
K-6719	24" (610 mm) x 20-1/4" (514 mm) blank back service sink	☐ 0 White

Recommended Accessories			
K-6672	Trap for 2" (50 mm) iron pipe	☐ NA	
K-6673	Trap for 3" (76 mm) iron pipe	☐ NA	
K-8905	Knoxford™ faucet for K-6714 and K-6716 sinks	☐ CP	☐ RP
K-8906	Knoxford™ faucet for K-6718 and K-6719 sinks	☐ CP	☐ RP
K-8907	Kinlock™ faucet for K-6714 and K-6716 sinks	☐ CP	☐ RP
K-8908	Kinlock™ faucet for K-6718 and K-6719 sinks	☐ CP	☐ RP

Product Specification:

The service sink shall be 22-1/4" (565 mm) in length and 18-1/4" (464 mm) in width, or 24" (610 mm) in length and 20-1/4" (514 mm) in width. Sink shall be made of cast iron with acid resistant enamel finish. Sink shall be single compartment with drilled back (K-6714 and K-6716) or blank back (K-6718 and K-6719). Sink shall have a rim guard. Sink shall be Kohler Model K-_____-0.


Technical Information

Fixture*:	Basin area	Water depth
Sink (K-6714 and K-6718)	18" (457 mm) x 14" (356 mm)	12" (305 mm)
Sink (K-6716 and K-6719)	20" (508 mm) x 16" (406 mm)	12" (305 mm)
Drain hole	Ø 2-7/8" (73 mm)	
Faucet holes	Ø 1-1/2" (38 mm)	
Rim guard holes	Ø 5/8" (16 mm)	
* Approximate measurements for comparison only.		

Included Components:	
Hangers	64515
Stainless steel rim guard (K-6714 and K-6718)	44603
Stainless steel rim guard (K-6716 and K-6719)	44602

Installation Notes

Install this product according to the installation guide.

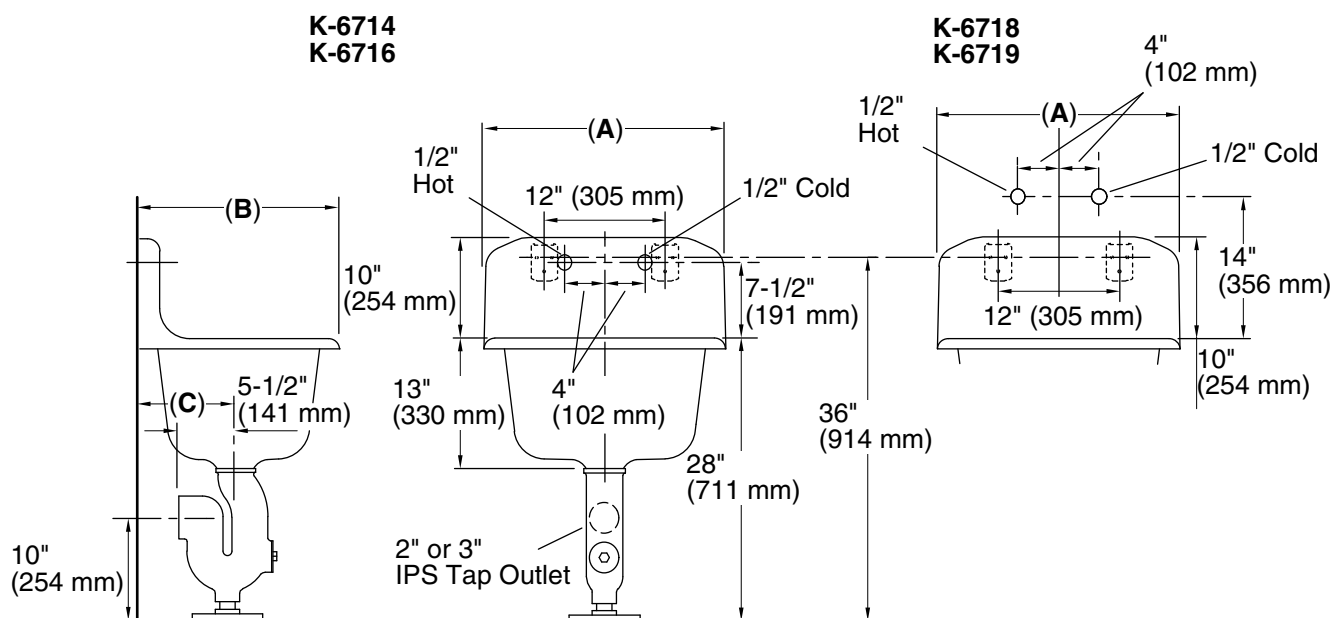

	(A)	(B)	(C)
K-6714, K-6718	22-1/4" (565 mm)	18-1/4" (464 mm)	8-1/2" (216 mm)
K-6716, K-6719	24" (610 mm)	20-1/4" (514 mm)	9-1/2" (241 mm)

Product Diagram