



DESCRIPTION

The IXW-MAA-SOFT is a multi-purpose adaptor for the IX | IXG Series. It comes with licenses for 1, 5, or 10 IX-SOFT PC master station instances.

The relay outputs are assigned to a specific station and programmed to change state when a relay on the associated station changes state.

The IXW-MAA-SOFT can be surface mounted directly to the wall through the mounting points on either side or on the included DIN rail. Wire terminations connect directly to the inputs and outputs on the station.

The IXW-MAA-SOFT can be programmed with the IX or IXG Support Tool.


FEATURES

- Supports 1, 5, or 10 IX-SOFT licenses
- 10 Form C relay outputs
- Surface mounts to a wall directly or to the included DIN rail.
- Programmable with the IX or IXG Support Tool.
- PoE powered

IXW-MAA-SOFT

Multi-Purpose Adaptor with PC Master Station Software

FEATURE CALL-OUT

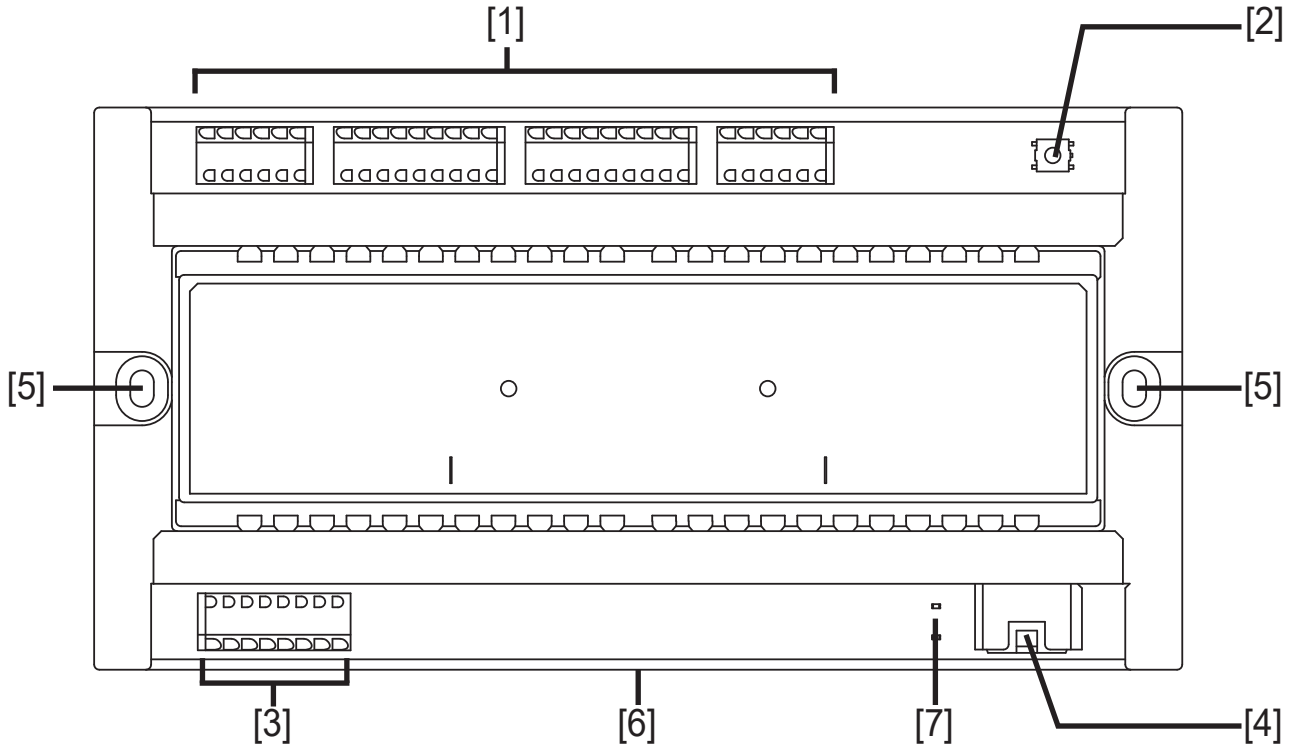

FEATURE CALL-OUT DEFINITIONS

- [1] Contact outputs 1-10
- [2] Reset button
- [3] Contact inputs 1-4
- [4] LAN port
- [5] Mounting point
- [6] DIN rail mount (on back of adaptor)
- [7] Status indicators

SPECIFICATIONS

- Power Source:** PoE (IEEE 802.3af class 0)
- Power Draw:** 4.48 W (max)
- Relay Output Method:** 10 Form C Dry relays
- Relay Output Rating:** 24V AC/DC 500mA
- LAN:** Ethernet (10BASE-T, 100BASE-TX)
- Protocols:** IPv4, IPv6, TCP, UDP, HTTP, HTTPS, SMTP, SFTP, DHCP, NTP, DNS
- Port Security:** IEEE 802.1X
- Operating Temp:** 14° ~ 122°F (-10° ~ 50°C)
- Dimensions:** 4-1/4" H x 8-1/4" W x 2-3/8" D