

# SSPEX-P SERIES STAINLESS STEEL PEX PLUG



## SPECIFICATION:


- For use with ASTM F2769, ASTM F2023, (PE-RT) SDR9 pipe
- For use with ASTM F876 PEX pipe
- Fittings are made to ASTM F1807 standard
- Maximum Pressure Rating: 200 PSI
- Temperature Range: Up to 400°F (204°C)

## CERTIFICATION:

- cUPC Listed
- NSF/ANSI 61 & 372 Certified



| MATERIAL LIST              |                        |
|----------------------------|------------------------|
| Name                       | Percent of Composition |
| <b>304 Stainless Steel</b> |                        |
| Iron (Fe)                  | 64.0 - 72.0            |
| Carbon (C)                 | 0.08 max               |
| Silicone (Si)              | 1.00 max               |
| Manganese (Mn)             | 2.00 max               |
| Phosphorus (P)             | 0.04 max               |
| Sulfur (S)                 | 0.04 max               |
| Chromium (Cr)              | 18.0 - 21.0            |
| Nickel (Ni)                | 8.0 - 11.0             |

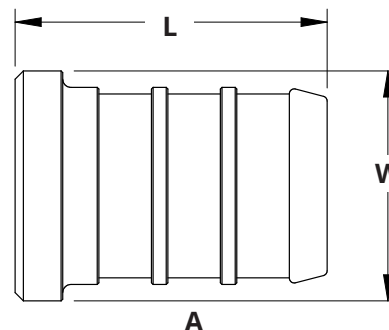

| DIMENSIONS |                   |        |       |        |       |        |       |
|------------|-------------------|--------|-------|--------|-------|--------|-------|
| Part No.   | Nominal Pipe Size | L      |       | W      |       | Weight |       |
|            | A                 | inches | mm    | inches | mm    | lbs    | grams |
| SSPEX-P05  | 1/2"              | 0.75   | 19.05 | 0.45   | 11.43 | 0.04   | 18.14 |
| SSPEX-P07  | 3/4"              | 0.75   | 19.05 | 0.65   | 16.51 | 0.08   | 36.29 |
| SSPEX-P10  | 1"                | 0.95   | 24.13 | 0.85   | 21.59 | 0.15   | 68.04 |

**BOSHART**  
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0  
Tel: 800-561-3164

**boshart.com** ♦ **blog.boshart.com**