

CAT#:	Job:	Type:
-------	------	-------



Features

Built for superior LED performance packed with feature

- LED open striplight
- Long life 50,000 hour LEDs at L70 for reduced maintenance
- Choice of two LED color temperatures
- Choice of four lumen packages per size
- Available in 4' or 8' lengths
- Optional integral emergency battery pack
- Heavy die-formed steel channel
- Fully assembled fixture for quick installation
- LED boards and driver accessible for future maintenance or upgrades
- Modular replaceable LED components
- Surface mount or suspended
- For narrow lens LED striplight use LRO or LPT
- DesignLights Consortium® (DLC) qualified

Certifications/Listings



Ordering Information

MODEL		SIZE	COLOR TEMP	LUMENS	DRIVER	VOLTAGE	OPTIONS
LCS	LED Striplight	4 4'	35 3500K	LW Low Watt	E Fixed Output	U 120V-277V	ELL14 Emergency battery pack, 1400 lumens
		8 8'	40 4000K	ML Medium Lumen	ESD Stepped Dimming		GLR Fast blow fuse
				HL High Lumen	ED 0-10V Dimming		PAF Paint after fabrication
				VL Very High Lumen			NYC NYC compliant

ACCESSORIES (order separately)	
CSWG4	4' wire guard
S18	18" stem canopy
SS18	18" swivel stemm 45° swivel
CSHC	Chain hanger assembly

Specifications

Construction:

- Housing, wireway, and ends are formed from code-gauge steel. Housing components act as heat sink for LED heat dissipation. Knockouts are provided for electrical access and mounting.

Finish:

- White painted parts are treated with a five-stage phosphate bonding process and finished with high reflectance baked enamel. For a post-painted housing finished select PAF option.

Electrical:


- Long-life LEDs are rated for 50,000 hours at L70 lumen maintenance. Driver options include fixed output for on/off function, step dimming (high/low/off) or continuous 0-10W dimming.

Certification:

- All luminaires are built to UL 1598 and 2108 standards, and bear appropriate CSA c/US labels. Damp location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards. DesignLights Consortium® (DLC) qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

Warranty:

- Five year

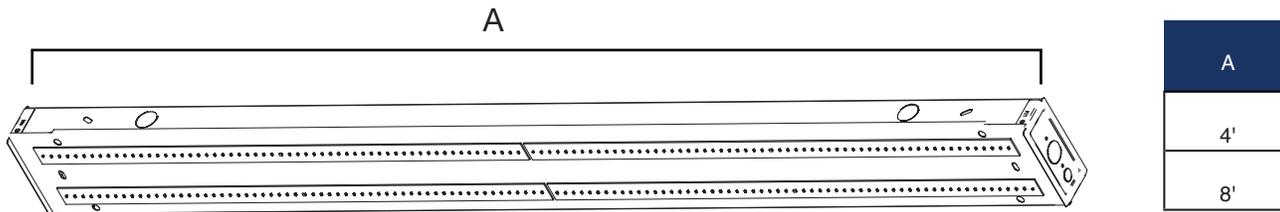

Performance Summary

SIZE	LUMEN PACKAGE	NOMINAL LUMENS	NOMINAL WATTS
4'	LW	2,800	27
	ML	5,600	53
	HL	6,800	61
	VL	11,200	106
8'	LW	5,600	53
	ML	11,200	106
	HL	13,600	122
	VL	22,400	212

Actual lumens will vary according to color temperature and other factors. For exact lumens and watts see specific photometric tests.