



# ASSEMBLY INSTRUCTION

**A** Table Leg Frame




2PCS

**B** Table Top

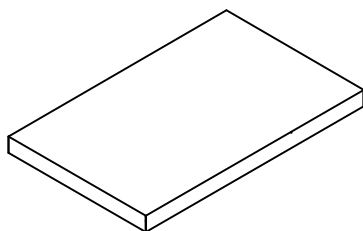

1PC

**C** Table Apron



2PCS

**D** Pan Head Bolt  
1/4"\*16mm



16PCS

**E** Wood Screw  
5mm\*70mm




10PCS

**F** L-Allen Key




1PC

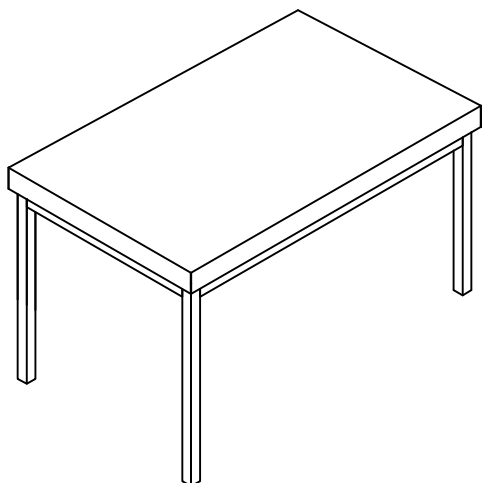


This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.

- 
- 1** Table Leg Frame(A) and Table Top(B) to the Table Apron(C), insert the Pan Head Bolt(D) to the holes, turn the L-Allen Key(F) to tighten them.

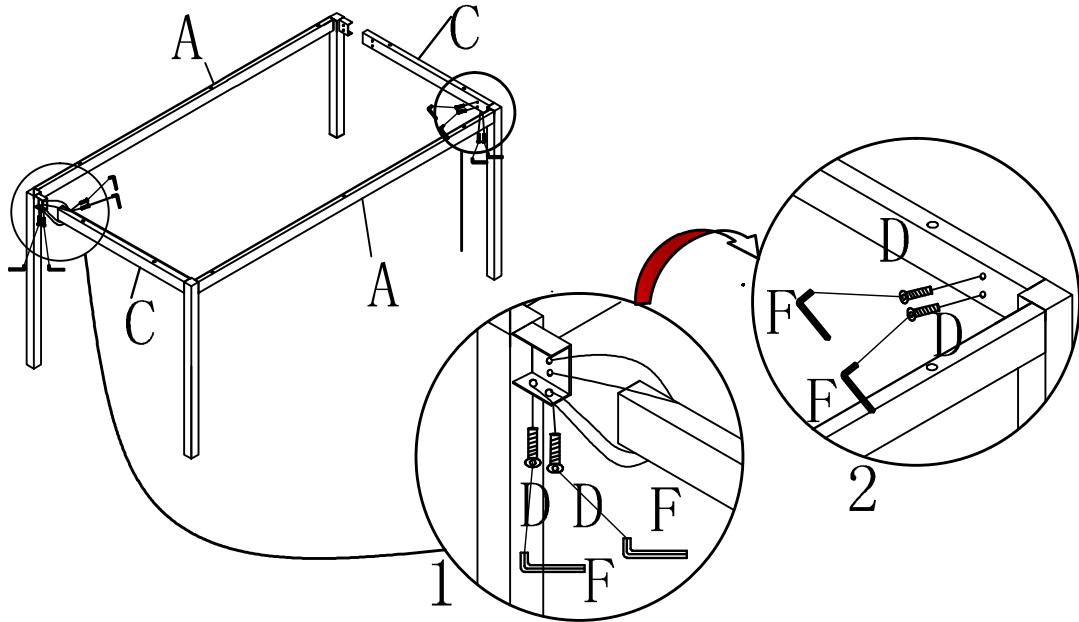

- 
- 2** Attach the Table Top(B) to the seat, insert the Wood Screw(E) then tighten it.

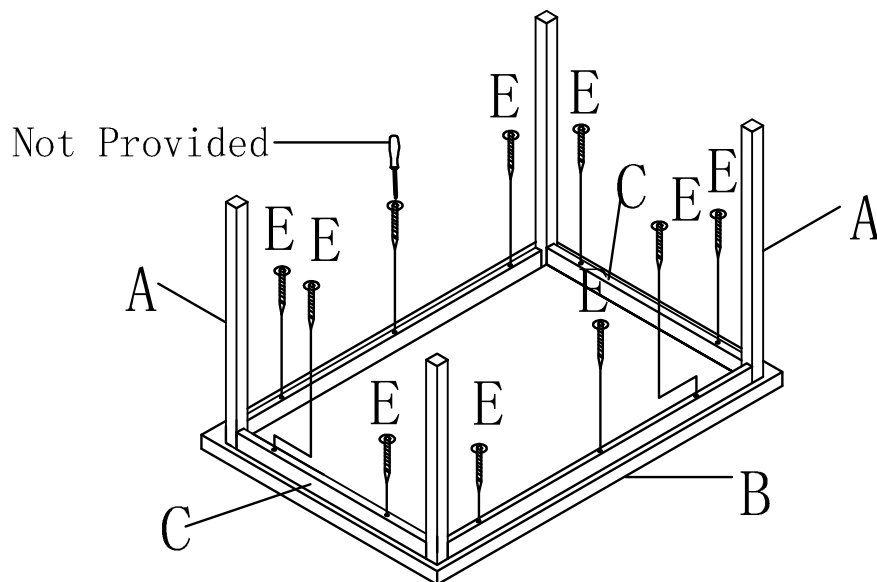

---


### Cleaning & Care

Treat surface with care. Surface is resistant to scratches but is not scratchresistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.

# ASSEMBLY INSTRUCTION


## SIDE CHAIR (K/D)

**A** Left Side Frame



4PCS

**B** Right Side Frame




4PCS

**C** Chair Back




4PCS

**D** Front Rail



4PCS

**E** Seat Cushion



4PCS

**F** Long Bolt  
1/4"\*19mm



24PCS

**G** Screw  
5mm\*54mm




16PCS

**H** L-Allen Key  
4mm




1PC

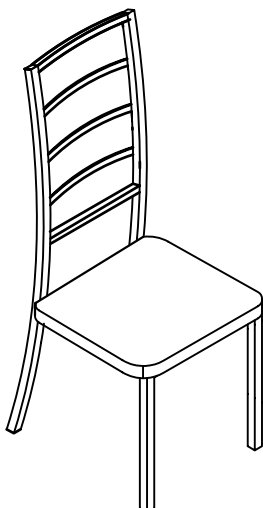

This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.


**1** Align Left Side Frame(A) and Right Side Frame(B) to the Seat Rail(D) and Chair Back(C), insert the Long Bolt(F) to the holes, turn the L-Allen Key(H) to tighten them. Take the Allen Wrench, and turn the bolts until the legs are secure. DO NOT TIGHTEN COMPLETELY. Stop when you feel you are adding force to tighten the bolt. Stand chair up on an even surface and check that it is balanced. If there is a slight wobble, apply downward pressure in the corner where a leg is uneven. Keeping pressure in that corner, tighten all bolts. If balanced, apply downward pressure evenly in the center and tighten all bolts. Do not over-tighten beyond hole depth.

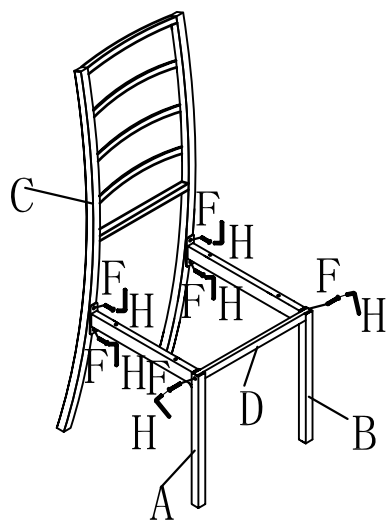

Helpful Tip:

-Instead of applying downward pressure while reaching under to tighten bolts, have someone sit in the chair while you tighten the bolts.

**2** Attach the Seat Cushion(E) to the seat, insert the Screw(G) then tighten it.

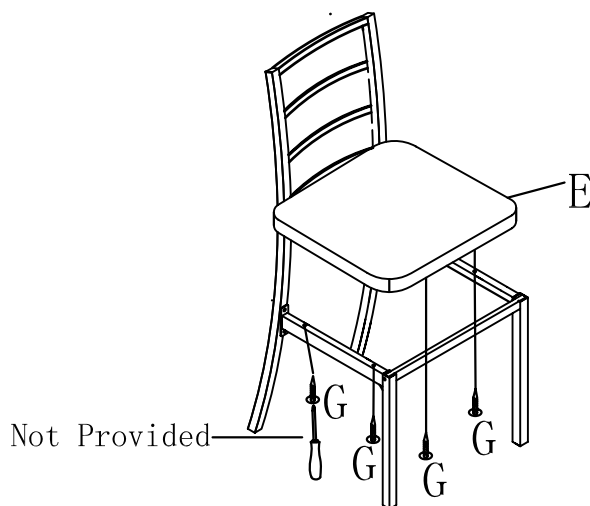

## Cleaning & Care

Treat surface with care. Surface is resistant to scratches but is not scratchresistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.