

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:

Contractor:

B1-**DL/B2-**DL/B3-**DL Speedi Plumb® PLUS Braided Toilet Connectors - Compression Inlet

Use: For use in potable water distribution systems in accessible locations only.

Design Features:


- **Engineered polymer braided fibers** bend freely without kinking or crimping.
- **Reinforced PVC inner hose** provides added durability.
- **Rubber washers** provide a large pliable sealing surface and to help maintain a water-tight connection.
- **Long wing nuts** allow for quick connection and ensure dependable thread engagement.
- **No-lead brass material** meets compliance for safe drinking.

Operating Specifications:

Temperature: 40°- 160°F, intermittent to 180°F

Pressure: 125 PSI maximum

Tubing Diameter: 0.300" ID (0.550" OD)

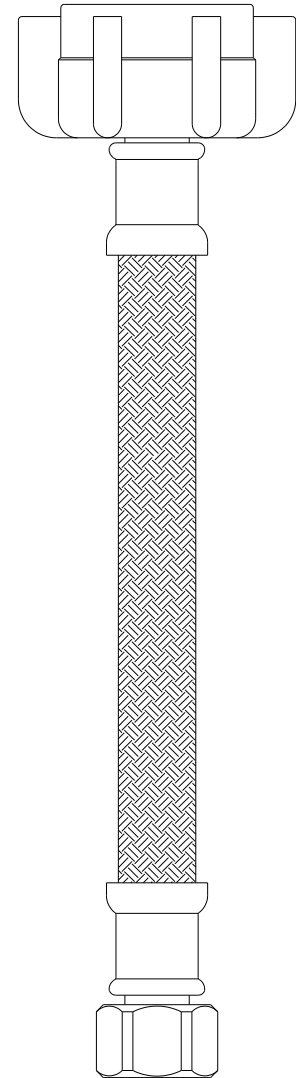

CONNECTOR MATERIAL SPECIFICATIONS

Inner Hose	Reinforced PVC
Braiding	PVC coated yarn
Barb	Brass
Ferrule	Stainless steel
Nut	Brass, plated or polypropylene
Washer	Rubber
Compression Nut	Brass, plated
FIP Adaptors	Brass, plated

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

400.339 B1/ B2/ B3 SPP Braided Toilet Connector - Comp Inlet REV 10.25

BrassCraft®

© 2025 BrassCraft Manufacturing Company

B1-**DL/B2-**DL/B3-**DL Speedi Plumb® PLUS Braided Toilet Connectors - Compression Inlet

Part Listing:

<input type="checkbox"/>	B1-6DL F	3/8" Compression x 7/8" Ballcock x 6" Length
<input type="checkbox"/>	B1-9DL F	3/8" Compression x 7/8" Ballcock x 9" Length
<input type="checkbox"/>	B1-9DLM F	3/8" Compression x 7/8" Ballcock (Metal Nut) x 9" Length
<input type="checkbox"/>	B1-12DL F	3/8" Compression x 7/8" Ballcock x 12" Length
<input type="checkbox"/>	B1-12DL P3	3/8" Compression x 7/8" Ballcock x 12" Length, Bagged, 3-pack
<input type="checkbox"/>	B1-12DLM F	3/8" Compression x 7/8" Ballcock (Metal Nut) x 12" Length
<input type="checkbox"/>	B1-12DLU D	Universal Connector - 3/8" Compression x 7/8" Ballcock x 12" Length with 7/16" and 1/2" Slip-Joint and 1/2" FIP Adaptors or 7/16" Rubber Slip Nut
<input type="checkbox"/>	B1-12DLMB F	3/8" Compression x 7/8" Ballcock x 12" Length, Matte Black Finish
<input type="checkbox"/>	B1-16DL F	3/8" Compression x 7/8" Ballcock x 16" Length
<input type="checkbox"/>	B1-16DLM F	3/8" Compression x 7/8" Ballcock (Metal Nut) x 16" Length
<input type="checkbox"/>	B1-16DLMB F	3/8" Compression x 7/8" Ballcock x 16" Length, Matte Black Finish
<input type="checkbox"/>	B1-20DL F	3/8" Compression x 7/8" Ballcock x 20" Length
<input type="checkbox"/>	B1-20DLM F	3/8" Compression x 7/8" Ballcock (Metal Nut) x 20" Length
<input type="checkbox"/>	B1-20DLMB F	3/8" Compression x 7/8" Ballcock x 20" Length, Matte Black Finish
<input type="checkbox"/>	B2-12DL F	7/16" Compression x 7/8" Ballcock x 12" Length
<input type="checkbox"/>	B2-20DL F	7/16" Compression x 7/8" Ballcock x 20" Length
<input type="checkbox"/>	B3-9DL F	1/2" Compression x 7/8" Ballcock x 9" Length
<input type="checkbox"/>	B3-12DL F	1/2" Compression x 7/8" Ballcock x 12" Length
<input type="checkbox"/>	B3-12DLM F	1/2" Compression x 7/8" Ballcock (Metal Nut) x 12" Length
<input type="checkbox"/>	B3-20DL F	1/2" Compression x 7/8" Ballcock x 20" Length


This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

400.339 B1/ B2/ B3 SPP Braided Toilet Connector - Comp Inlet REV 10.25

BrassCraft®

© 2025 BrassCraft Manufacturing Company

B1-**DL/B2-**DL/B3-**DL Speedi Plumb® PLUS Braided Toilet Connectors - Compression Inlet

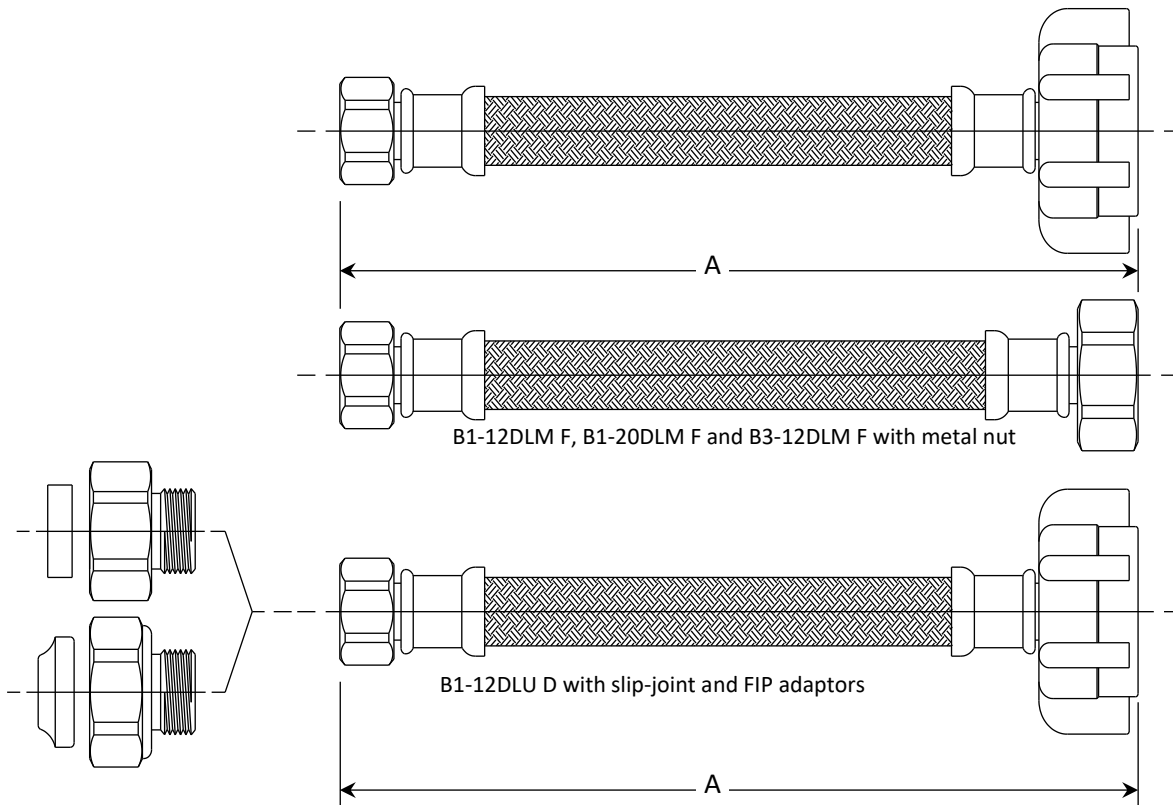

PART DIMENSIONS (Inches)	
Model	DIM. A
B1-6DL	6.0 / 7.0
B1-9DL	9.0 / 10.0
B1-12DL	12.0 / 13.0
B1-16DL	16.0 / 17.0
B1-20DL	20.0 / 21.0

PART DIMENSIONS (Inches)	
Model	DIM. A
B2-12DL	12.0 / 13.0
B2-20DL	20.0 / 21.0
B3-9DL	9.0 / 10.0
B3-12DL	12.0 / 13.0
B3-20DL	20.0 / 21.0

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 / CSA B125.6
- IAPMO listed to NSF/ANSI 372 for Low-Lead Compliance
- IAPMO listed to NSF/ANSI/CAN 61

NSF/ANSI/
CAN61:Q ≤0.5



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.