



# DARE TO BE BOLD

HISTORIA™

COLORBODY™ PORCELAIN

TRUEDGE™ | REVEAL IMAGING®

**MARAZZI** 

DARE TO BE BOLD™



HISTORIA™



VINTAGE BLACK

With a hint of the antique, Historia whispers of marbled halls in timeless estates. Select from a well-rounded offering of stone-look colors with dramatic veining, aged to perfection by generations of use. Available in large-format sizes 12x24, 24x24, and 24x48. The collection also includes a 4x8 half hex that offers multiple design options when mixing colors to create unique patterns. Anchor your design in the solidarity of the past with Historia.





# HISTORIA™

## COLORBODY™ PORCELAIN

TRUEEDGE™ | REVEAL IMAGING®

### FLOOR TILE - LIGHT POLISHED




**HT20** Heirloom White



**HT21** Antique Beige



**HT22** Heritage Gray

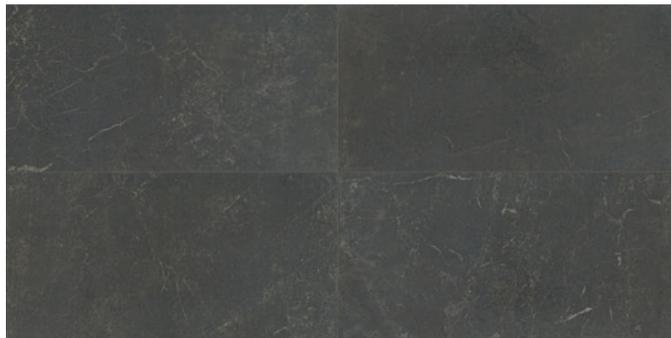

**HT23** Vintage Black

### 4 x 8 HALF HEX DECO - LIGHT POLISHED



**HT20** Heirloom White



**HT21** Antique Beige



**HT22** Heritage Gray




**HT23** Vintage Black

### DESIGN IDEAS



Antique Beige & Vintage Black

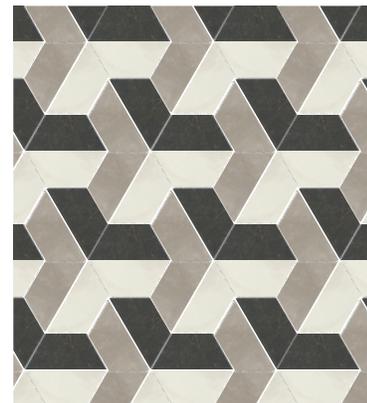

Heirloom White, Heritage Gray & Vintage Black

### USAGE

Floors	Walls	Countertops
F	W	C

# HISTORIA™

## COLORBODY™ PORCELAIN

TRUEEDGE® | REVEAL IMAGING®

### SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	24 x 48 Floor Tile	(23-3/8" x 46-15/16") (59.44 cm x 119.30 cm)	5/16"	15.26	2
	24 x 24 Floor Tile	(23-3/8" x 23-3/8") (59.44 cm x 59.44 cm)	5/16"	15.20	4
	12 x 24 Floor Tile	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	5/16"	15.12	8
	4 x 8 Half Hex Deco	(3-7/16" x 7-15/16") (8.72 cm x 20.16 cm)	5/16"	3.56	25

### APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level - Interior Floor	N/A	■
Wet & Level - Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	■
Countertops	N/A	■
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [marazzitile.com/DCOF](http://marazzitile.com/DCOF).

#### APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.



All or select items within this series meet the requirements for these qualifications. For more information visit [marazzitile.com](http://marazzitile.com).

### TRIM

Description	Number	Size	Shape
Floor Bullnose	P-43F9	3 x 24	

### INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	 High Variation

### PERFORMANCE CHARACTERISTICS

	ASTM#	Floor/Deco Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	7.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: [marazzitile.com/information/TestResults](http://marazzitile.com/information/TestResults).

### NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [marazzitile.com/Factors](http://marazzitile.com/Factors).

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [marazzitile.com/LargeTiles](http://marazzitile.com/LargeTiles) for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at [www.tileusa.com](http://www.tileusa.com).

PHOTOGRAPHY INDEX:

Cover

**HISTORIA™ in Heirloom White 12 x 24 on Floor**

Page 2-3

**HISTORIA™ in Vintage Black 24 x 48 on floor**

Page 4-5

**HISTORIA™ in Heirloom White 12 x 24 on Floor**



7834 C.F. Hawn Freeway  
Dallas, Texas 75217

[www.marazzitile.com](http://www.marazzitile.com)  
[contact@marazzitile.com](mailto:contact@marazzitile.com)

©2019 Marazzi | 06.19 | MZBRO131 Historia™ Brochure

Color and other aesthetic features shown are as close as the limitation of the printing process will allow. We have tried to make this brochure as comprehensive and factual as possible. We reserve the right, however, to make changes at any time, without notice, in colors, materials, packaging, specifications and availability. Since some information may have been updated since time of printing, please check with Marazzi Customer Service for details.