

**Z880**




SPECIFICATION SHEET

2 1/2 [64] WIDE REVEAL TRENCH DRAIN SYSTEM

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

SPECIFYING ENGINEER IS RESPONSIBLE
FOR CONCRETE ENCASEMENT AND
REINFORCING BASED UPON
APPLICATION AND LOCAL CODES

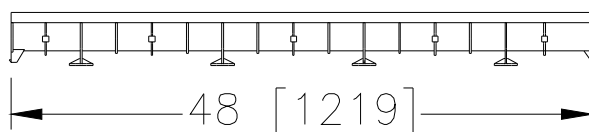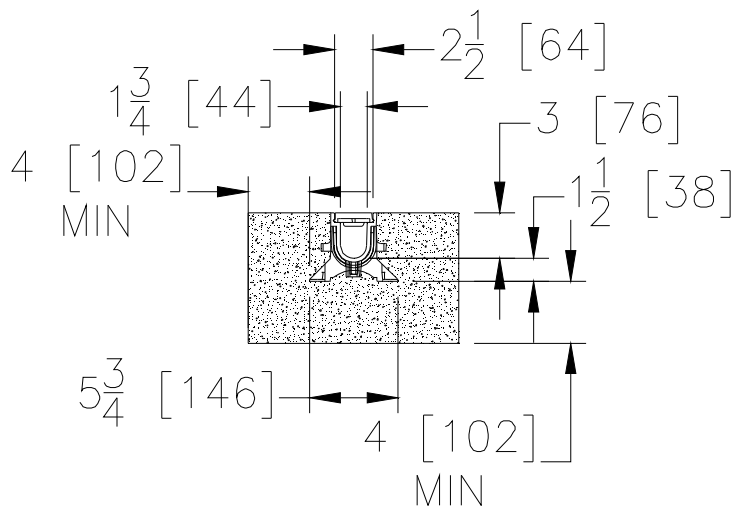

ENGINEERING SPECIFICATION: Zurn Z880 2 1/2 [64] Wide Trench Drain System shall be 48 [1220] long and 2 1/2 [63.5] wide. Drain shall be 3 [76] deep. Drain shall be made of (HDPE) High Density Polyethylene, and is UV-10 stabilized. Drain shall have bedding feet to be used for positioning and anchoring purposes. Drain shall have tongue and groove snap fit connection. Drain shall have 24 [610] long high-density polyethylene decorative grate (-POG) provided as standard.

PREFIX OPTIONS (Check/specify appropriate options)

___ Z Four-foot, Linear High Density Polyethylene (HPDE) Modular Drain Channel*

SUFFIX OPTIONS (Check/specify appropriate options)**Outlet Adapters Add/Each**

___ -E1 Closed End Cap
___ -E1.5 1-1/2 [38] No-Hub End Outlet
___ -U1.5 1-1/2 [38] No-Hub Bottom Outlet

Grate Options (Load Classifications are per DIN EN1433)

___ -AWG Aluminum Wire Grate - Class A
___ -BZ Bronze Decorative Grate - Class A
___ -POG Heel-Proof Polyethylene Grate - Class A *
___ -SOG Stainless Steel Decorative Grate
___ -SWG Stainless Steel Wire Grate - Class A

Miscellaneous Options

___ -C45 45 Degree Channel
___ -C90 90 Degree Channel
___ -G45 45 Degree Plastic Grate
___ -G90 90 Degree Plastic Grate
___ -SS45 45 Degree Channel and Stainless Steel Grate
___ -SS90 90 Degree Channel and Stainless Steel Grate

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. A DATE: 07/03/13 C.N. NO. 129577**PROD./DWG. NO. Z880**

ZURN INDUSTRIES, LLC ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292