




**SYMMONS®** Naru®




Location:

412HSB

3 Mode Hand Shower Unit

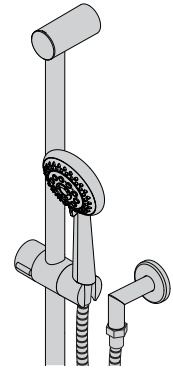**Specification Submittal**




Model Numbers	Feature Highlights	
<input type="checkbox"/> <b>412HSB</b> <i>3 Mode Hand Shower Unit</i>	<ul style="list-style-type: none"><li>• 3 mode hand shower</li><li>• 3-5/8" diameter hand shower head</li><li>• Dual checks for backflow protection</li><li>• 30" slide bar with cradle for hand shower mounting</li><li>• 60" flexible metal hose</li><li>• Standard 2.0 gpm (7.6 L/min) flow restrictor</li><li>• Shall be metal and nonmetallic construction, plated in standard polished chrome finish</li></ul>	
Options/Modifications		
<input type="checkbox"/> <b>-1.5</b>  <i>1.5 gpm (5.7 L/min) flow restrictor</i>		
<input type="checkbox"/> <b>-STN</b> <i>Satin Nickel finish</i>		
<input type="checkbox"/> <b>-LHS</b> <i>Less hand shower wand</i>		
<b>Note:</b> Append appropriate -suffix to model number.		
Compliance	Warranty	
- ASME A112.18.1/CSA B125.1		
	<p><b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations.</p> <p><b>10 Years</b> - for commercial/industrial installations. Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.</p>	

## Architectural/ Engineering Specification

Symmons 3 Mode Hand Shower Unit \_\_\_\_\_ Includes 3 mode hand shower, 3-5/8" diameter hand shower head, Dual checks for backflow protection, 30" slide bar with cradle for hand shower mounting, 60" flexible metal hose, Standard 2.0 gpm (7.6 L/min) flow restrictor, Shall be metal and nonmetallic construction, plated in standard polished chrome finish. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant. Available options: "-1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "-STN - Satin Nickel finish", "-LHS - Less hand shower wand".

412HSB

## Dimensions

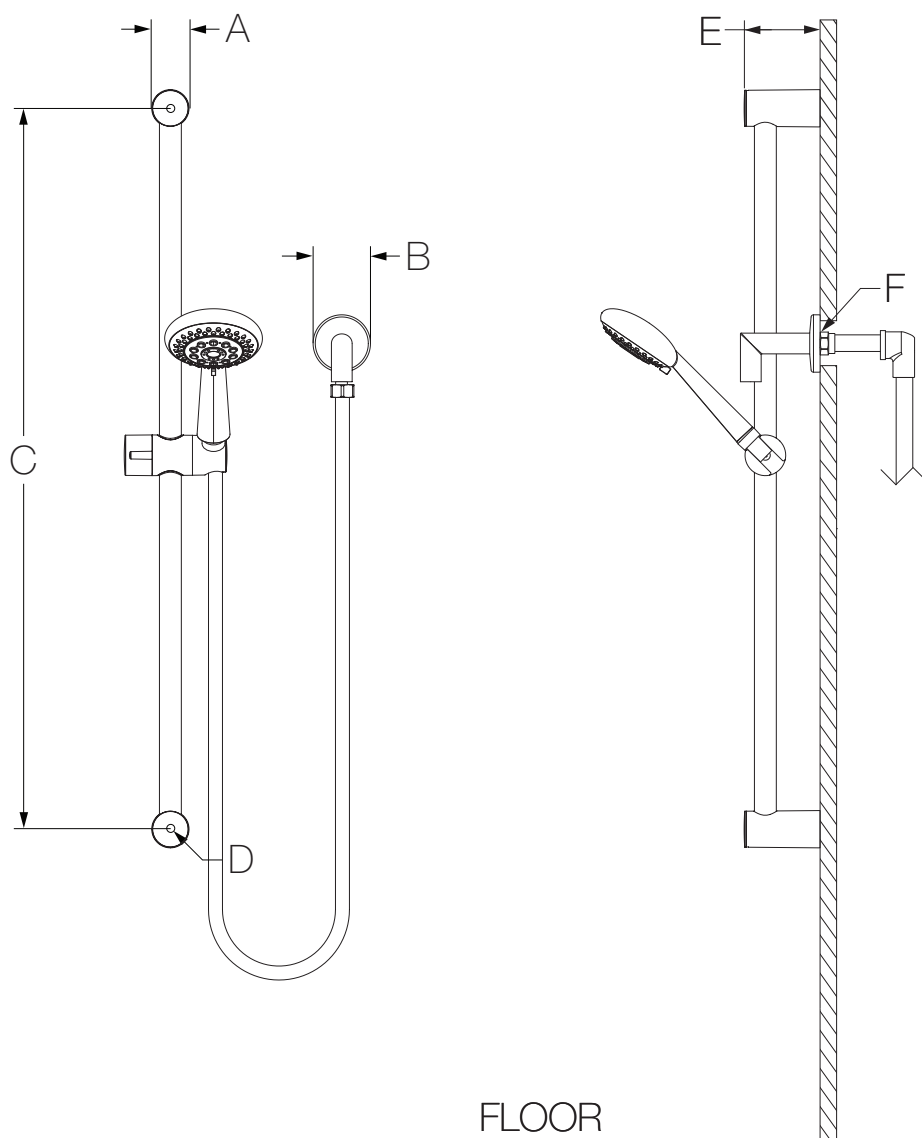

Measurements	
<b>A</b>	Ø 1-1/2", 38 mm
<b>B</b>	2-1/4", 57 mm
<b>C</b>	28-9/16", 725 mm
<b>D</b>	(2x) Hole Size: Ø 1/4", 6 mm
<b>E</b>	3", 76 mm
<b>F</b>	Female 1/2" IPS fitting must be recessed 7/8" from finished wall

**Note:** Dimensions subject to change without notice.