



ABOUND™

GLAZED CERAMIC FLOOR, WALL & MOSAIC WITH REVEAL IMAGING®

FLOOR
& WALL



AMERICAN OLEAN®
PROVEN IN TILE™

AMERICANOLEAN.COM

ABOUND™

Influenced by the classic beauty of polished marble, Abound by American Olean® is perfect for residential bathrooms and kitchens, thanks to its versatility in both design and format. Featuring floor, wall, mosaic and decorative accent options, Abound can be used effortlessly throughout a room for a seamless design. A neutral color palette of both warm and cool tones complement virtually any setting, promising a lifetime of style and appeal.

Photo features Abound Parchment 18 x 18 floor tile on the floor.

ABOUND™

GLAZED CERAMIC FLOOR, WALL & MOSAIC WITH REVEAL IMAGING®

FLOOR TILE



BILLOW AB01



PARCHMENT AB02



NIMBUS AB03



ASHEN AB04



UMBER AB05

10 x 14 WALL TILE



BILLOW AB01



PARCHMENT AB02



NIMBUS AB03



ASHEN AB04



UMBER AB05

2 x 4 MOSAIC




BILLOW AB01



PARCHMENT AB02



NIMBUS AB03



ASHEN AB04




UMBER AB05

DECORATIVE WALL ACCENTS



WARM UNIVERSAL AB06
(Coordinates with AB01, AB02, AB05)




COOL UNIVERSAL AB07
(Coordinates with AB03, AB04)

ABOUND™

GLAZED CERAMIC FLOOR, WALL & MOSAIC WITH REVEAL IMAGING®

SIZES, SHADE VARIATION & PRICING

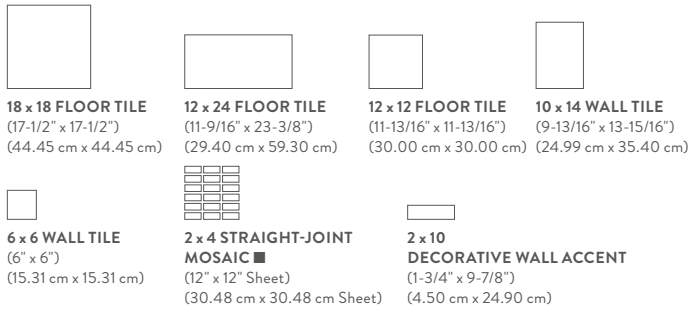

■ Dot-mounted



TILE THICKNESS: 5/16" (18 x 18, 12 x 12, 10 x 14, 6 x 6), 3/8" (12 x 24), 1/4" Mosaic
RECOMMENDED GROUT JOINT: 3/16" Floor (overlap should not exceed 33% when installing tile with a length of 15" or greater in a staggered brick-joint pattern), 1/16" Wall, 1/8" Mosaic
RELATIVE PRICING: Medium

PERFORMANCE CHARACTERISTICS

| | MOISTURE ABSORPTION | BREAKING STRENGTH | MOHS | CHEMICAL RESISTANCE | ABRASION RESISTANCE |
|--------|---------------------|-------------------|-----------|---------------------|---------------------|
| Floor | < 7.0% | > 250 lbs. | 8.0 | Resistant | 4 |
| Wall | < 20.0% | 120 - 230 lbs. | 4.0 - 6.0 | Resistant | N/A |
| Mosaic | < 3.0% | > 250 lbs. | 8.0 | Resistant | 4 |

CLEANING PROCEDURES

- Remove loose dust and dirt with a damp cloth or sponge
- Use a neutral, non-abrasive cleaner suitable for ceramic tile
- Remove cleaning solution with a clean, damp sponge or mop

INSTALLATION METHODS BACKING MATERIALS

- Concrete
- Exterior grade plywood
- Cementitious backer board

SETTING

- Latex modified thin-set
- Epoxy

GROUTING

- Sanded grout for floor & mosaic
- Unsanded grout for wall
- Epoxy grout

Cover photo features Abound Parchment 18 x 18 floor tile on the floor and Parchment 6 x 6 wall tile and 2 x 4 mosaic on the wall.

NOTES

Special consideration must be given when installing tiles greater than 15 inches. Please refer to americanolean.com/LargeTiles for more information.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

All or select items within this series are made in the USA. For more information visit americanolean.com/MadeInUSA.

For additional information, refer to "Factors to Consider" at americanolean.com/Factors.




Naturally, many of our products can help you earn LEED™ credits.

888.AOT.TILE
©2017 AMERICAN OLEAN (02/17)



AMERICAN OLEAN®
PROVEN IN TILE™

TRIM

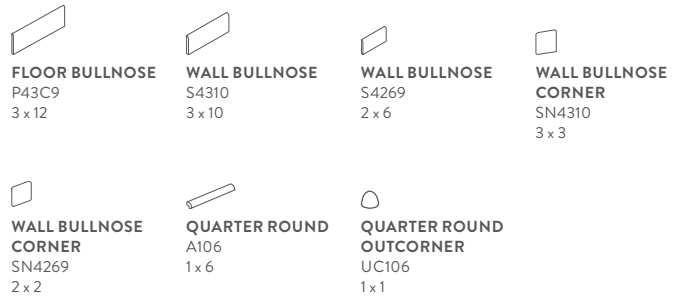

Floor bullnose trim is intended to coordinate with floor field tile in the standard 90-degree installation position.

FLOOR APPLICATIONS

| (EXCLUDES WALL TILE) | TARGET DCOF WET | SUITABLE |
|--------------------------------------------------------------------------------|-----------------|----------|
| Dry & Level - Interior | N/A | ● |
| Wet & Level - Interior | ≥ 0.42 | ●* |
| Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear | ≥ 0.60 | ○ |
| Ramps & Inclines | ≥ 0.65 | ○ |

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

OTHER APPLICATIONS

| | SUITABLE |
|--------------------|----------|
| Walls/Backsplashes | ● |
| Countertops | ●** |
| Pool Linings | ●*** |

APPLICATION NOTES:

* Mosaic only. Mosaic also suitable for residential and light commercial shower floors.

** Floor, mosaic and 6x6 wall tile only

*** Mosaic and 6x6 wall tile only

Suitable for exterior applications in non-freezing climates only when proper installation methods are followed.



POST-CONSUMER RECYCLED MATERIALS

PRE-CONSUMER RECYCLED MATERIALS

MADE IN THE U.S.A.

REVEAL IMAGING®