

TECHNICAL INFORMATION



V2 Slight Variation



V3 Moderate Variation



V4 Substantial Variation



Import



Recommend offset
pattern $\leq 33\%$




Frost Resistant



Water Absorption:
 $\leq 0.5\%$



Made in Italy

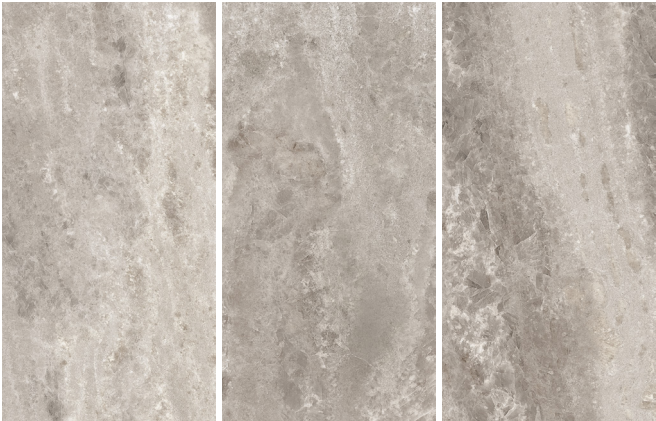

Heritage Cloud (V4)
FLO HLCL

48" x 110" x 6mm


48" x 95" x 6mm

48" x 48" x 6mm

24" x 48" x 6mm

32" x 71" x 9mm

24" x 48" x 9mm

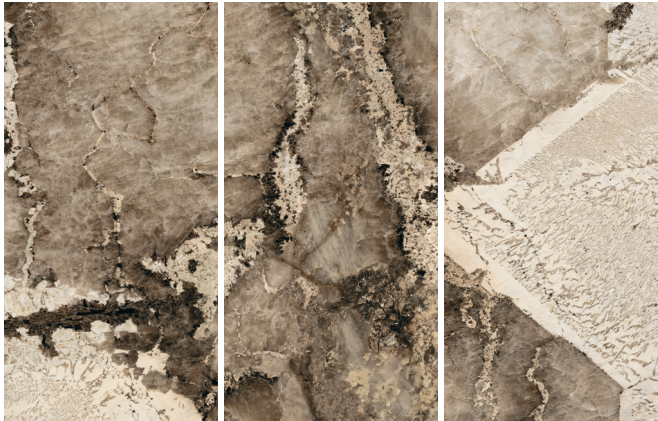

Heritage Flame (V4)
FLO HLFL

48" x 110" x 6mm


48" x 95" x 6mm

48" x 48" x 6mm

24" x 48" x 6mm

32" x 71" x 9mm

24" x 48" x 9mm

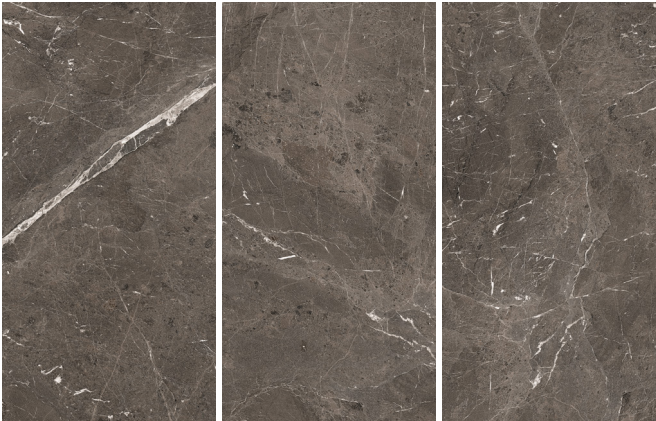

Heritage Brown (V2)
FLO HLBR

48" x 110" x 6mm


48" x 95" x 6mm

48" x 48" x 6mm

24" x 48" x 6mm

32" x 71" x 9mm

24" x 48" x 9mm

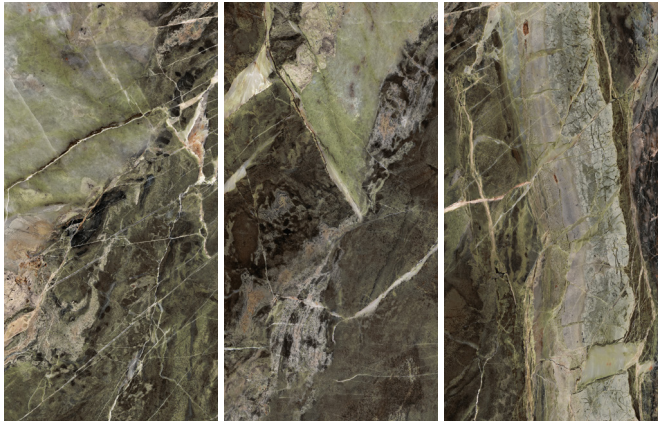

Heritage Emerald
(V4)
FLO HLEM

48" x 110" x 6mm

48" x 95" x 6mm

48" x 48" x 6mm

24" x 48" x 6mm

32" x 71" x 9mm

24" x 48" x 9mm



Heritage Aqua (V2)
FLO HLAQ

48" x 110" x 6mm


48" x 95" x 6mm

48" x 48" x 6mm

24" x 48" x 6mm

32" x 71" x 9mm

24" x 48" x 9mm

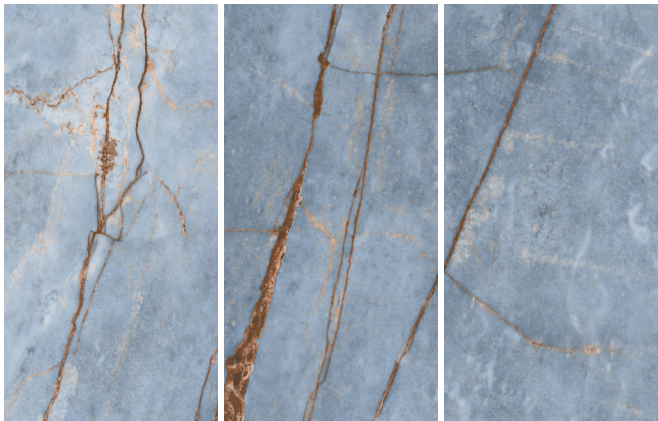

Heritage Azure (V3)
FLO HLAZ

48" x 110" x 6mm


48" x 95" x 6mm

48" x 48" x 6mm

24" x 48" x 6mm

32" x 71" x 9mm

24" x 48" x 9mm

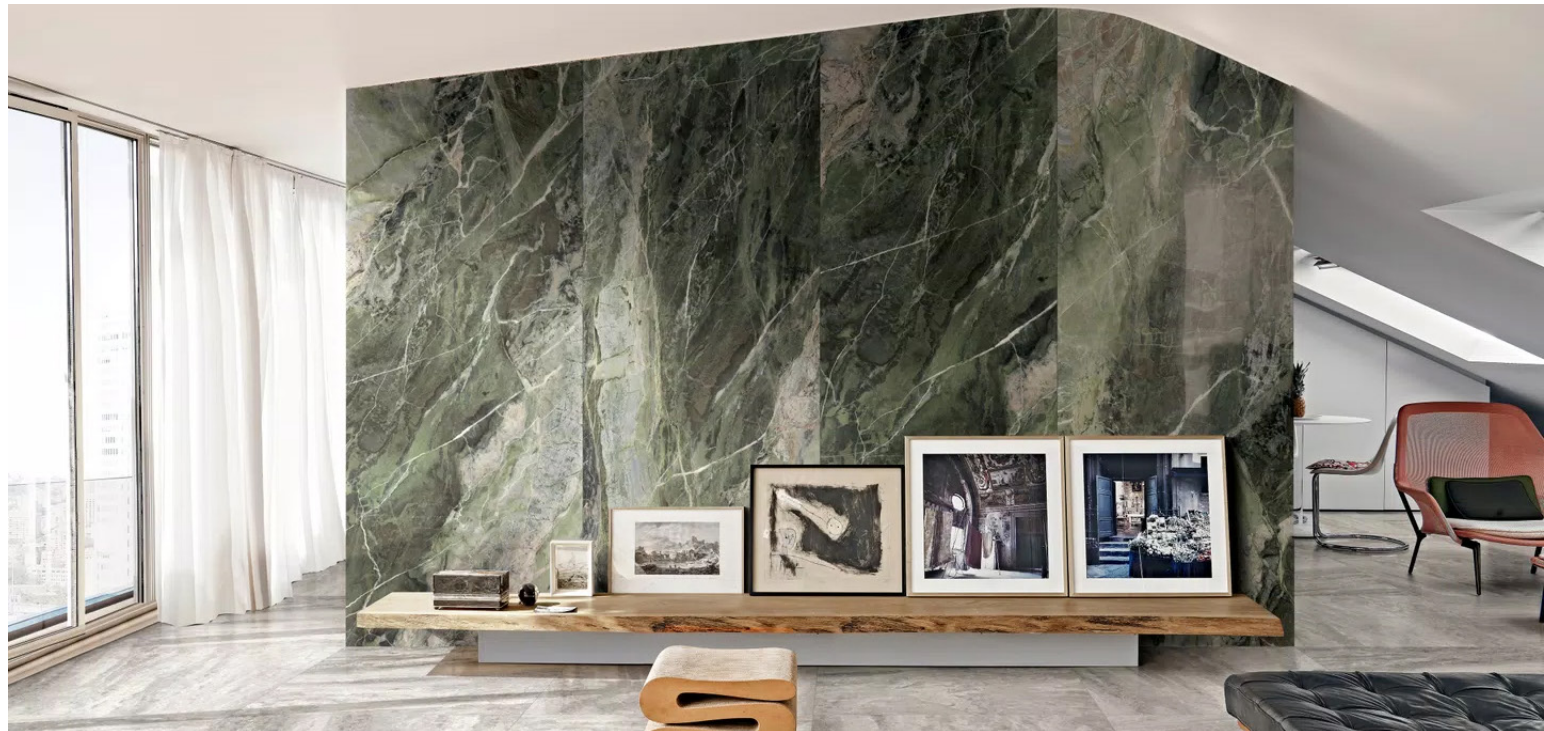

Tiles, Mosaic and Trim*


SIZE	ACTUAL	THICKNESS	FINISH
47" x 111" Slab Rectified	47.24" x 110.24"	6	Gloss & Matte
48" x 95" Slab Rectified	47.24" x 94.49"	6	Gloss & Matte
48" x 48" Slab Rectified	47.24" x 47.24"	6	Gloss & Matte
32" x 71" Slab Rectified	31.50" x 70.87"	9	Gloss & Matte
24" x 48" 9mm Rectified	23.62" x 47.24"	9	Gloss & Matte
24" x 48" 6mm Rectified	23.62" x 47.24"	6	Gloss & Matte
15" x 19" Maze Mosaic	15.35" x 19.29"	6	Gloss
12" x 24" Trinity Mosaic	11.81" x 23.62"	6	Gloss
12" x 24" Picket Mosaic	11.81" x 23.62"	6	Gloss
13" x 47" Gradino	12.99" x 47.24"	9	Gloss & Matte
2" x 24" Bullnose 9mm	1.81" x 23.62"	9	Gloss & Matte
2" x 24" Bullnose 6mm	1.81" x 23.62"	6	Gloss & Matte

* Not all sizes are available in all colors and finishes.

Application**

		6mm		9mm	
		WALL	FLOOR	WALL	FLOOR
Interior	Residential	•	•	•	•
Interior	Commercial	•	•	•	•
Interior	Heavy Commercial	•	•	•	•
Exterior	Residential/Commercial	•		•	

** These recommendations are not defined by ANSI Standards

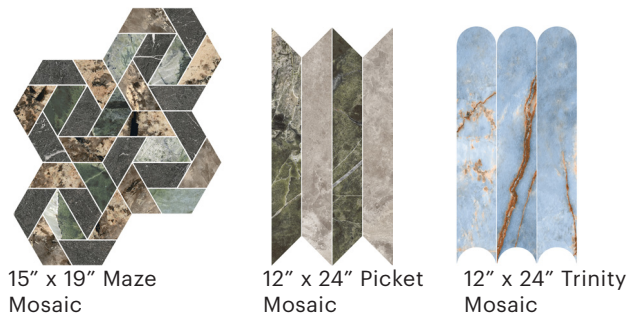

Performance Characteristics

	6mm	9mm
Breaking Strength	≥1300 N	≥1300 N
Chemical Resistance	UA-ULA-ULB	UA-ULA-ULB-UHA-UHB
DCOF	> 0.42	N/A
Deep Scratch Resistance - Unglazed	<175mm³	<175mm³
Frost Resistance	Resistant	Resistant
Mohs Hardness - EN101	N/A	N/A
Water Absorption	≤0.5%	≤0.5%
Certifications	LEED, Greenguard, CE ISO 9001 ISO 14001 ISO 45001	LEED, Greenguard, CE ISO 9001 ISO 14001 ISO 45001
Country of Origin	Italy	Italy
Shade Variation Code	V1 & V2	V1 & V2

