



JAY R. SMITH MFG. CO.
MEMBER OF MORRIS GROUP INTERNATIONAL
POST OFFICE BOX 3237
MONTGOMERY, ALABAMA 36109-0237 (USA)
TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



LOCATION

P

DRAWING NUMBER
S2230, 2235

SIZE
A

SCALE:
NONE

DATE:
5-17-85

APPROVED BY:
TD

CHECKED BY:
TD

DRAWN BY:
PJ

2230, 2235

FIGURE
NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA


DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

FLOOR DRAINS

WITH 12" (305) ROUND TOPS AND SEDIMENT BUCKETS

MEDIUM DUTY DRAINS - "SAFE-SET" BUCKET

FUNCTION: For general use where water contains solids or debris that must be intercepted. Large top is used where high flows are anticipated. "Safe-Set" design insures bucket replacement after cleaning since top grate cannot be inserted unless bucket is in place.

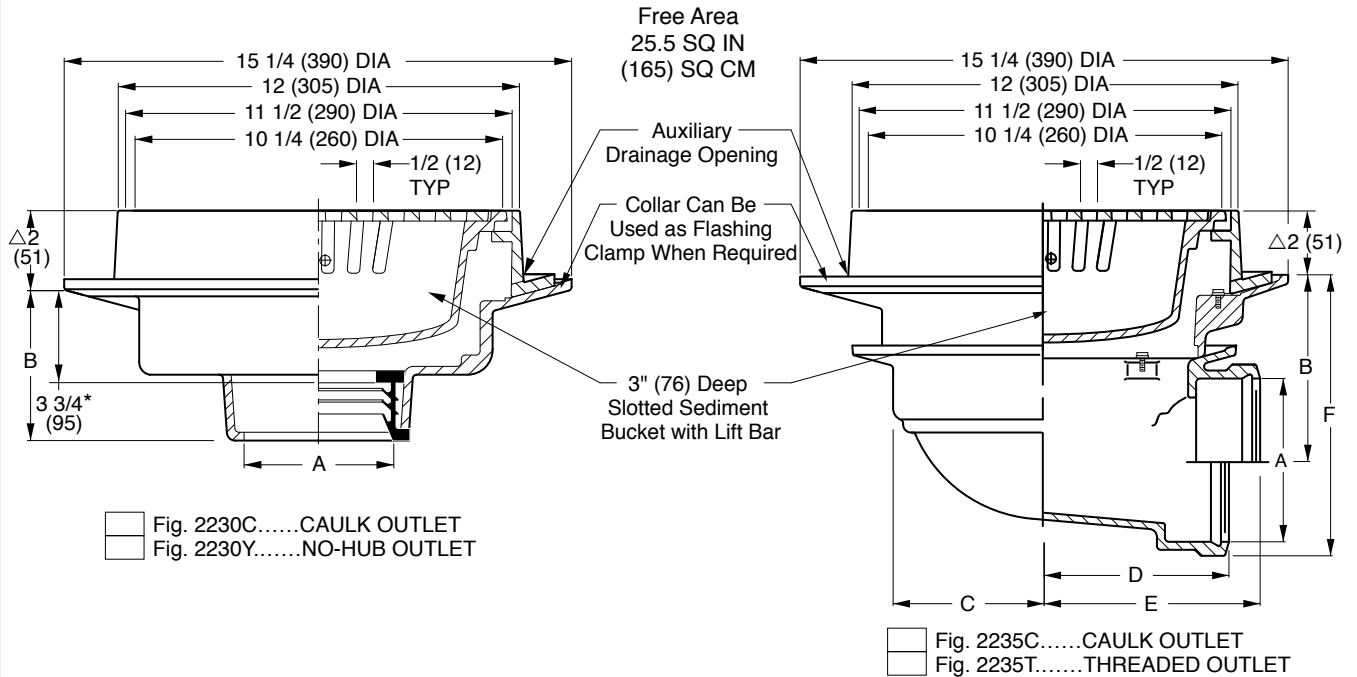

A Size	B	
	Caulk, NO-HUB & Speedi-Set	Threaded
02(50),03(75)04(100) 05(125) & 06(150)	5 (125)	3 3/4 (95)

A SIZE	02(50)	03(75)	04(100)	05(125)	06(150)
B	6 7/8(175)	6 3/8(162)	5 7/8(149)	5(125)	4 1/2(115)
C	4 3/4(120)	4 3/4(120)	4 3/4(120)	6 1/4(160)	6 1/4(160)
D	6(150)	6(150)	6(150)	6 5/8(168)	6 7/8(175)
E	7 1/4(185)	7 1/2(190)	7 3/4(195)	7 3/4(195)	7 3/4(195)
F	8 5/8(219)	8 3/4(220)	8 3/4(220)	8 1/2(215)	8 1/2(215)

REGULARLY FURNISHED:

Duco Cast Iron Body and Flashing
Collar with Cast Iron ADA Grate
and Slotted Sediment Bucket.

* This Dimension to Internal Stop
of Speedi-Set Gasket.
△ Add 5/16" (8) when bronze top
is specified.
△ Add 7/8" (22) when hinged cast
iron top is specified.

• Hinged grate not available in
safe-set design. Full grate is
provided with a suspended
bucket.

VARIATIONS:

- ☐ Hinged Grate -H
- ☐ L Speedi-Set Service Weight 2(50), 3(75)
& 4"(100) sizes only (Fig. 2230 only)
- ☐ LXH Speedi-Set Extra Heavy 2(50), 3(75)
& 4"(100) sizes only (Fig. 2230 only)
- ☐ NO-HUB Adaptor (Specify Fig. 2646Y)
(Fig. 2235 only)
- ☐ Solid Free Standing Bucket -B
- ☐ Square Top -S
- ☐ Trap Primer Connection -P050 1/2" (13)
& -P075 3/4" (19) (Fig. 2230 only)
- ☐ Vandal Proof Grate -U
- ☐ Wide Deck Flange Drain (Specify Fig. DX2566)
- ☐ T Threaded Outlet
- ☐ Quad Close Trap Seal (Specify Fig. 2692)
(Fig. 2230 Only)

OPTIONAL MATERIALS:

- ☐ Galvanized Cast Iron -G
- ☐ Nickel Bronze -NB
- ☐ Polished Bronze -PB

NOTE: 02(50), 03(75) & 04" (100) sizes
require a transition collar (as shown in
above illustration) which fits between the
body & collar. 05 (125) & 06 (150) sizes
do not require transition collar

NOTE: Dimensions shown in
parentheses are in millimeters..

P N M L	6-12-15 8-27-10 04/22/10 10/09/09	Revised Variations Corrected Symbols & Dims. Corrected Symbols & Dims. Added ADA Grate-opening Dim.	TBW RN JJ JJ	CL CL TK TK	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 2230, 2235
REV.	DATE	DESCRIPTION	BY	CKD.			



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov