

ZURN Light Commercial

Renew-Flo™ Drains

The ZURN Light Commercial RD2150 Renew-Flo™ retrofit roof drain consists of a 304 stainless steel constructed body, a Dura-Coated cast iron membrane clamp and dome, with a neoprene gasketed connection. The RD150 combines high quality and durability with ease of installation.

Features include:

- One-piece stainless steel body and flange
- Superior flow characteristics
- A large 20" square flange with anchor slats
- Available in 3", 4", 5" and 6" pipe sizes

The RD2150 utilizes a variety of roof drain options making it the most versatile retrofit roof drain available. ZURN Light Commercial offers a complete package of roof drain products as shown below.



ZURN INDUSTRIES, LLC LIGHT COMMERCIAL OPERATION
1801 PITTSBURGH AVENUE, ERIE, PA, U.S.A. 16502,
PHONE: 885-ONE-ZURN (855-663-9876), FAX: 814/454-7929
www.zurn.com



RD2080 SMALL
AREA ROOF DRAIN



RD2090 SMALL
AREA ROOF DRAIN



RD2120 MAIN
AREA ROOF DRAIN



RD2130 COMBINATION
ROOF DRAIN AND
OVERFLOW




Retrofit Roof Drainage Systems

With ZURN Light Commercial Renew-Flo™ Drains



The RD2150 Replacement Roof Drain is installed inside of an existing drain. The drain is used where re-roofing is done over existing roofing as well as total roof replacement renovation applications. The original roof drain need not be disturbed and the new drain is installed by insertion into the leader pipe. The unique Neo-Loc gasket with one-way gripping ribs holds the drain in place. Once installed, the drain is sealed to the pipe, preventing possible leakage and holds the drain securely in place. Installation shows new insulation and membrane applied to

Note: Tie-down slots for fasteners are provided in the RD2150 flange. It is recommended these be utilized during construction to hold drain body firmly in place.

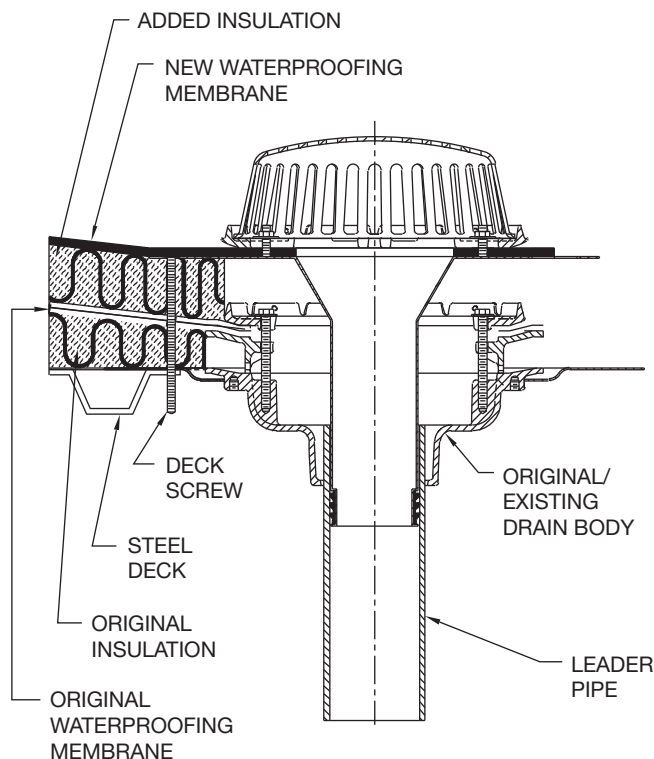

The RD2190 Universal Membrane Clamp is designed for retrofit roof applications where the existing main roof drain is to be utilized. The tie-down lugs of the collar match the bolt pattern of the more common roof drain bodies and conform to the surface angles of the flange, allowing timely replacement along with desirable surface pressure on the membrane. The universal Dura-Coated cast iron membrane clamp device (UMC), is designed to accompany most 15" and 16" diameter roof drain bodies with accessory bolt circles ranging from 8" to 10-1/2" in diameter.

Note: When using RD2190 UMC, it is advisable to extend roof membrane into the sump of existing roof drain body.

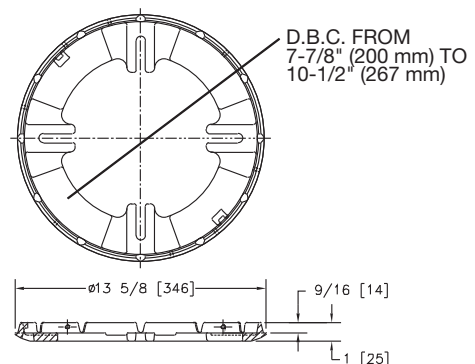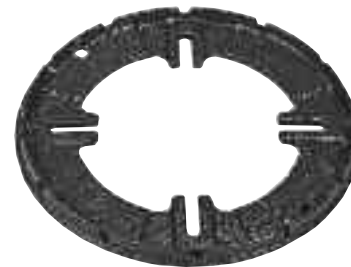

ZURN INDUSTRIES, LLC LIGHT COMMERCIAL OPERATION

1801 PITTSBURGH AVENUE, ERIE, PA, U.S.A. 16502, PHONE: 885-ONE-ZURN (855-663-9876), FAX: 814/454-7929 www.zurn.com

In Canada: **ZURN INDUSTRIES LIMITED**

3544 NASHUA DRIVE, MISSISSAUGA, ONTARIO L4V 1L2, PHONE: 905/405-8272, FAX: 905/405-1292

Form No. ZMKTG230-05, 7/12