

Ultra range copper Squeezon connectors

B, BKT, D, K, O and T dies

Range


Seven ultra range copper Squeezon connectors cover the range of wire sizes from #8 solid minimum through 4/0 stranded maximum.

Design advantages

The side slots, similar to those on ultra range aluminum Squeezon connectors, provide a wide conductor range and reduce the handle load on those connectors that can be applied with mechanical type tools.

Quality material specifications

These connectors are made of pure electrolytic copper, annealed dead soft for easy compression and maximum conductivity.

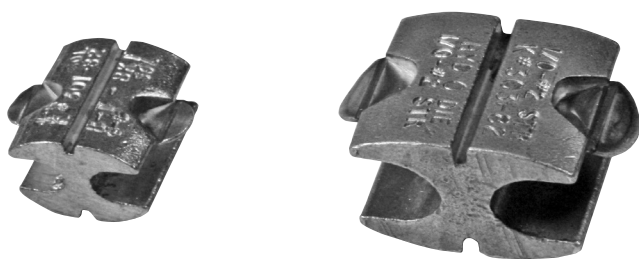

Ultra range copper Squeezon connectors

“B”, “BKT”, “D”, “K”, “O” and “T” Size Ultra Range Squeezon Connectors

Catalog Number	Copper			Copperweld			Wire Dia. Range (in.)		Die		Indents	
	Groove	Solid	Stranded	Solid	Stranded	Type A	Max	Min	O Tool	WH Tool	O Tool	WH Tool
301-82	A	#4, 6, 8	#6, 8	#4, 6, 8	3-#12	#8	.204	.128	B, T	B-K-T KBKT (Burndy)	3	1
	B	#4, 6, 8	#6, 8	#4, 6, 8	3-#12	#8	.204	.128				
302-82	A	#2, 4, 6	#4, 6	#2, 4, 6	3-#9, 10, 12	#6, 8	.258	.162	K	B-K-T	3	1
	B	#2, 4, 6	#4, 6	#2, 4, 6	3-#9, 10, 12	#6, 8	.258	.162				
303-82	A	2/0, 1/0	1/0, 1, 2	2/0, 1/0	7-#8, 9, 10 3-#6, 7	#2, 4	.373	.292	-	O	-	1
	B	2/0, 1/0	1/0, 1, 2	2/0, 1/0	7-#8, 9, 10 3-#6, 7	#2, 4	.373	.292				
304-82	A	2/0, 1/0, #1, 2	1/0 #1, 2	2/0, 1/0, #1, 2	7-#8, 9, 10 3-#6, 7, 8	#2, 4	.373	.258	-	O	-	1
	B	#2, 4, 6	#4, 6	#2, 4, 6	3-#9, 10, 12	#6, 8	.258	.162				
307-82	A	4/0-250	4/0, 3/0, 2/0	-	7-#6 (1/2) 7-#7 (7/16)	-	.528	.414	-	D	-	1
	B	4/0-250	4/0, 3/0, 2/0	-	7-#6 (1/2) 7-#7 (7/16)	-	.528	.414				
308-82	A	4/0-250	4/0, 3/0, 2/0	-	7-#6 (1/2) 7-#7 (7/16)	-	.528	.414	-	D	-	1
	B	2/0, 1/0 #1, 2	1/0, #1, 2	2/0, 1/0 #1, 2	7-#8, 9, 10 3-#6, 7, 8	#2, 4	.373	.258				
309-82	A	4/0-250	4/0, 3/0, 2/0	-	7-#6 (1/2) 7-#7 (7/16)	-	.528	.414	-	D	-	1
	B	2, 4, 6	4, 6	2, 4, 6	3-#9, 10, 12	#6, 8	.258	.162				