


ATLANTIS

F-072L

52" Ceiling Fan

WAC FANS LIMITED

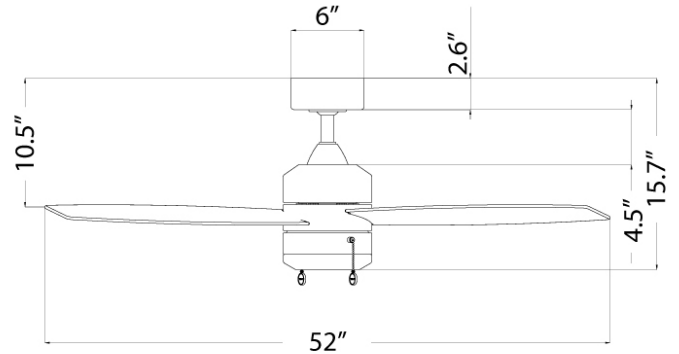

PRODUCT DESCRIPTION

ATLANTIS from WAC LIMITED offers a Damp rated, high-value fan with three speed options and can be reversed from the housing to pull hot air up during winter months. Enhance your interiors with the gently-curved shape of this elegant fan.

FEATURES

- 3 fan speeds
- Silent AC motor
- Pull chain operation
- Fan is reversible from housing
- Optional wall control (WC26-WT)

AIRFLOW/ENERGY EFFICIENCY

Weighed-Average Airflow/High:	3717/5001 CFM
Energy Use (W):	40/63 (High)
Estimated Yearly Energy Cost (\$):	11
Efficiency (CFM/W):	92 (High)
Max RPM:	188

ORDER NUMBER

Model	Housing	Blade
F-072L	BN <i>Brushed Nickel</i>	TT <i>Titanium Silver</i>
	MB <i>Matte Black</i>	MB <i>Matte Black</i>
	MW <i>Matte White</i>	MW <i>Matte White</i>

F-072L-__

Example: F-072L-MB

SPECIFICATIONS

Construction:	Steel, Plywood
Blade:	13° Pitch, 52" sweep
Downrod:	3/4"W X 6"H included
Mounting Slope:	Up to 30°
Wire:	80"
Hanging Weight:	18 lbs
Total Power:	83W
Standards:	Title 24 Compliant, Title 20 Compliant, Energy Star Rated, UL, cUL
Motor Type:	AC-153 x 16

LUMINAIRE PERFORMANCE

Light Source:	LED
Light Wattage:	19.5W
Lumens/Delivered Lumens:	1600/708
Dimming:	ELV
CRI:	90
Color Temperature:	3000K
Rated Life:	50,000 hours

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122




Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

ATLANTIS

F-072L

52" Ceiling Fan

OPTIONAL ACCESSORIES

Downrod		DR12- 12IN DR18- 18IN DR24- 24IN DR36- 36IN DR48- 48IN DR60- 60IN DR72- 72IN	BN Brushed Nickel MB Matte Black MW Matte White	All of our downrods are .75" O.D. and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.
Downrod Couplers		DC-		Connects two downrods together.
Sloped Ceiling Kit		SC-		Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch.

Examples: Downrod - **DR12-BN**, Downrod Coupler - **DC-MB**, Sloped Ceiling Kit - **SC-MW**

SUGGESTED DOWNROD HEIGHT USAGE

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

SLOPED CEILING DEGREE CONVERSION CHART

Degree	4-8°	9-13o	14-17o	18-21o	22-25o	26-29o	30-32o	33-35o	36-38o	39-41o	42-44o	45o
Ceiling Slope	1/12	2/12	3/12	4/12	5/12	6/12	7/12	8/12	9/12	10/12	11/12	12/12
Pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

NOTE: Recommended maximum downrod length of 72" with 80" lead wire