

Features

- Converts standard 12" (305 mm) rough-in products to 10" (254 mm) configuration
- Plastic trapway

Installation

- 10" (254 mm) rough-in

Recommended Products/Accessories

- K-33813-RA Tall two-piece elongated toilet with skirted trapway, 1.28 gpf
- K-3814 Two-piece elongated toilet with skirted trapway, 1.28 gpf
- K-3814-RA Two-piece elongated toilet with skirted trapway, 1.28 gpf
- K-3981 One-piece compact elongated toilet with skirted trapway, 1.28 gpf (Qty 2)
- K-5709 ContinuousClean XT two-piece elongated toilet with skirted trapway, 1.28 gpf
- K-5310 Two-piece elongated toilet with skirted trapway, 1.28 gpf
- K-5310-RA Two-piece elongated toilet with skirted trapway, 1.28 gpf
- K-20197 Two-piece elongated toilet with skirted trapway, 1.28 gpf
- K-20197-RA Two-piece elongated toilet with skirted trapway, 1.28 gpf
- K-20198 ContinuousClean XT two-piece elongated toilet with skirted trapway, 1.28 gpf
- K-78080 One-piece compact elongated toilet with skirted trapway, 1.28 gpf
- K-78080-RA One-piece compact elongated toilet with skirted trapway, 1.28 gpf
- K-6428 One-piece compact elongated toilet with skirted trapway, 1.28 gpf
- K-31674 The Complete Solution® two-piece elongated toilet with skirted trapway, 1.28 gpf
- K-45927 The Complete Solution® two-piece elongated toilet with skirted trapway, 1.28 gpf
- K-46018 The Complete Solution® ContinuousClean ST two-piece elongated toilet with skirted trapway, 1.28 gpf
- K-28161 Two-piece elongated toilet with skirted trapway, 1.28 gpf
- K-28161-RA Two-piece elongated toilet with skirted trapway, 1.28 gpf
- K-20450 Two-piece elongated toilet with skirted trapway, 1.28 gpf
- K-20450-RA Two-piece elongated toilet with skirted trapway, 1.28 gpf
- K-90097 ContinuousClean two-piece elongated toilet with




Codes/Standards

ASME A112.19.2/CSA B45.1

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

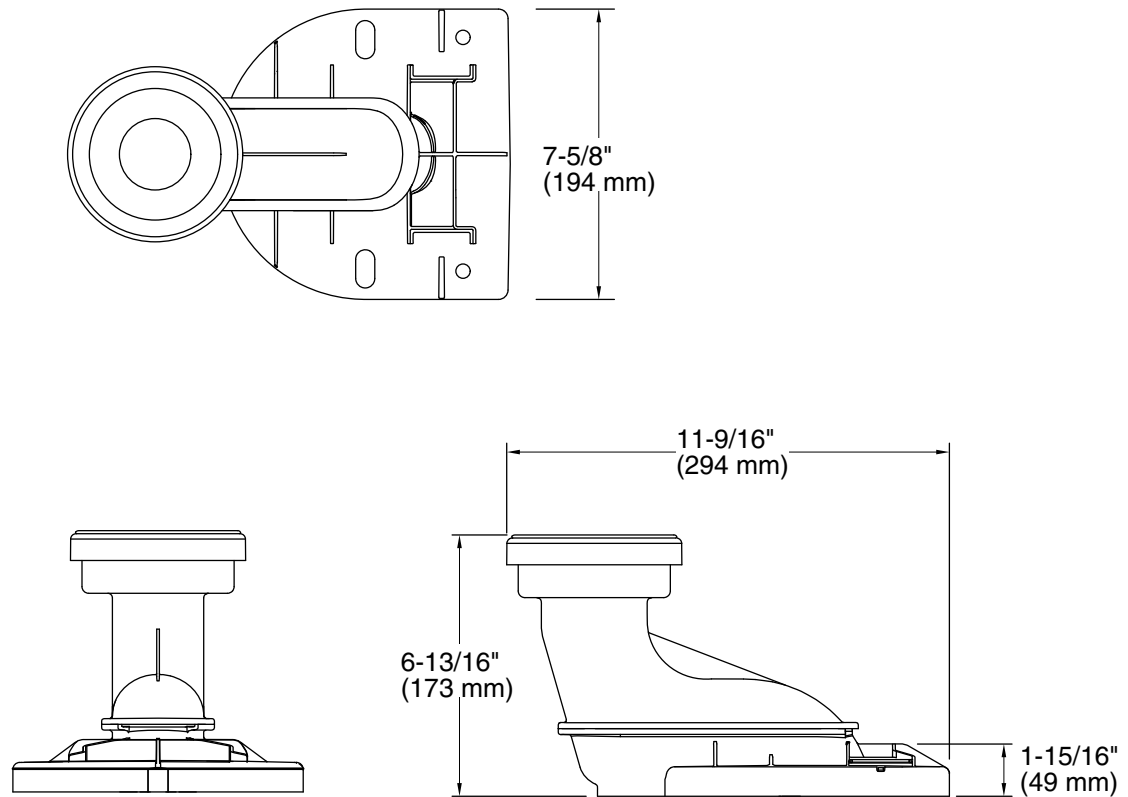

Technical Information

All product dimensions are nominal.

Material: Plastic

Notes

Install this product according to the installation guide.