


# Blythe



## Colors



Light Gray VTL BYLG

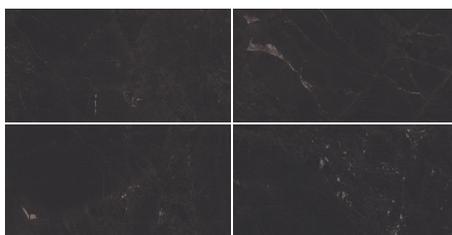

Black VTL BYBK



Bronze VTL BYBZ



Gold VTL BYGD




White VTL BYWH




Beige VTL BYBE

## Sizes



24" x 48" x 10.5mm  
Rectified



12" x 24" x 9.5mm  
Rectified

## Field Tiles\*

SIZE	ACTUAL	THICKNESS	FINISH
24" x 48" Leather Rectified	23.50" x 47.13"	10.50mm	Matte/Natural
12" x 24" Textured Exterior Rectified	11.69" x 23.50"	9.50mm	Bush-hammered
12" x 24" Leather	11.69" x 23.50"	9.50mm	Matte/Natural

\* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

## Mosaics & Coordinating Trims\*

SIZE	ACTUAL	FINISH
2" x 4" Mosaic Leather	11.69" x 11.69"	Matte/Natural
1" x 6" Mosaic Leather	11.42" x 11.69"	Matte/Natural
4" x 24" Bullnose Leather	3.82" x 23.50"	Matte/Natural
6" x 12" Cove Base	5.91" x 11.69"	Matte/Natural

Recommended Grout Joint: 1/8" - Rectified  
3/16" - Non Rectified

## Product Characteristics

	MATTE/NATURAL
Breaking Strength (ASTM C648 or ISO 10545-4)	> 450lbf
Chemical Resistance (ASTM C650 or ISO 10545-13)	Resistant
DCOF	0.50 - 0.60
Deep Scratch Resistance - Unglazed (ISO 10545-6)	N/A
Frost Resistance (ASTM C1026 or ISO 10545-12)	Resistant
Mohs Hardness - EN101	7
Water Absorption (ASTM C373 or ISO 10545-3)	< 0.50%
Certifications	Green Squared
Country of Origin	USA
Shade Variation Code	V3

## Application\*\*

		WALL	FLOOR
Interior	Residential	•	•
Interior	Commercial	•	
Interior	Heavy Commercial	•	
Exterior	Residential/Commercial	•	

\*\* These recommendations are not defined by ANSI Standards

## Material

Porcelain



Made in USA



Stock and Import



V3 Moderate Variation



DCOF: <0.50% - 0.60%



Green Squared



Scan QR Code for  
Product Information and  
Installation Images

## Request samples.

www.vitlsurfaces.com  
samples@vitlsurfaces.com

